

# UcD180

Hypex Electronics BV  
 Ulgersmaweg 137-D  
 9731 BR Groningen  
<http://www.hypex.nl>

## General Description

The UcD180 is a state-of-the-art full-range amplifier-module based on high-end UCD-technology. The module can be remotely switched ON/OFF and is small, lightweight and will fit into any of your applications:


- Active monitoring systems.
- Professional high-end audio.
- DIY-projects.
- Active Public Address systems.
- Active subwoofers.

In the UcD180 you will find a small, powerful and reliable amplifier for all your pure amplification needs.

## Features

- 180W/4Ω, 105W/8Ω (±50V supply).
- 0.01%<THD+N<0.02% 50W/8Ω 10Hz<f<20kHz.
- Power Bandwidth 10Hz<f<20kHz ±0.5dB.
- Input impedance 10kΩ.
- Stand-by mode (stand-by power <1W).
- Differential input.
- Short-circuit protection.
- Pop-free stop mode.
- Voltage gain: 26dB.
- Load-independent bandwidth.
- Efficiency >90%.
- Dimensions 65mm x 65mm x 31mm.
- Weighs only 95g.

## Connection Diagram

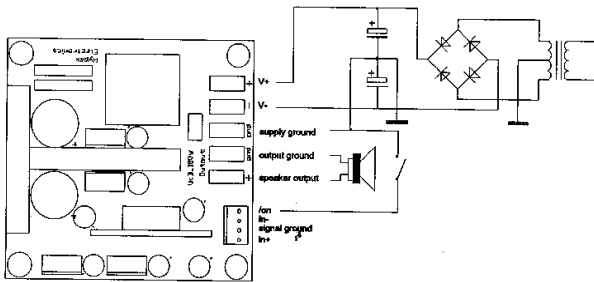

Connection	Description	min	max
V+	+ supply voltage	+20V	+50V
V-	- supply voltage	-20V	-50V
GND	Supply ground		
LS-	Output ground		
LS+	Output 'hot'		
/ON	On (internal pull-up)		
IN-	Negative signal input		
GND	Signal ground		
IN+	Positive signal input		

In case of an un-balanced source: connect IN- to signal-ground at the signal-source.

