VI SCHEMATIC DIAGRAM

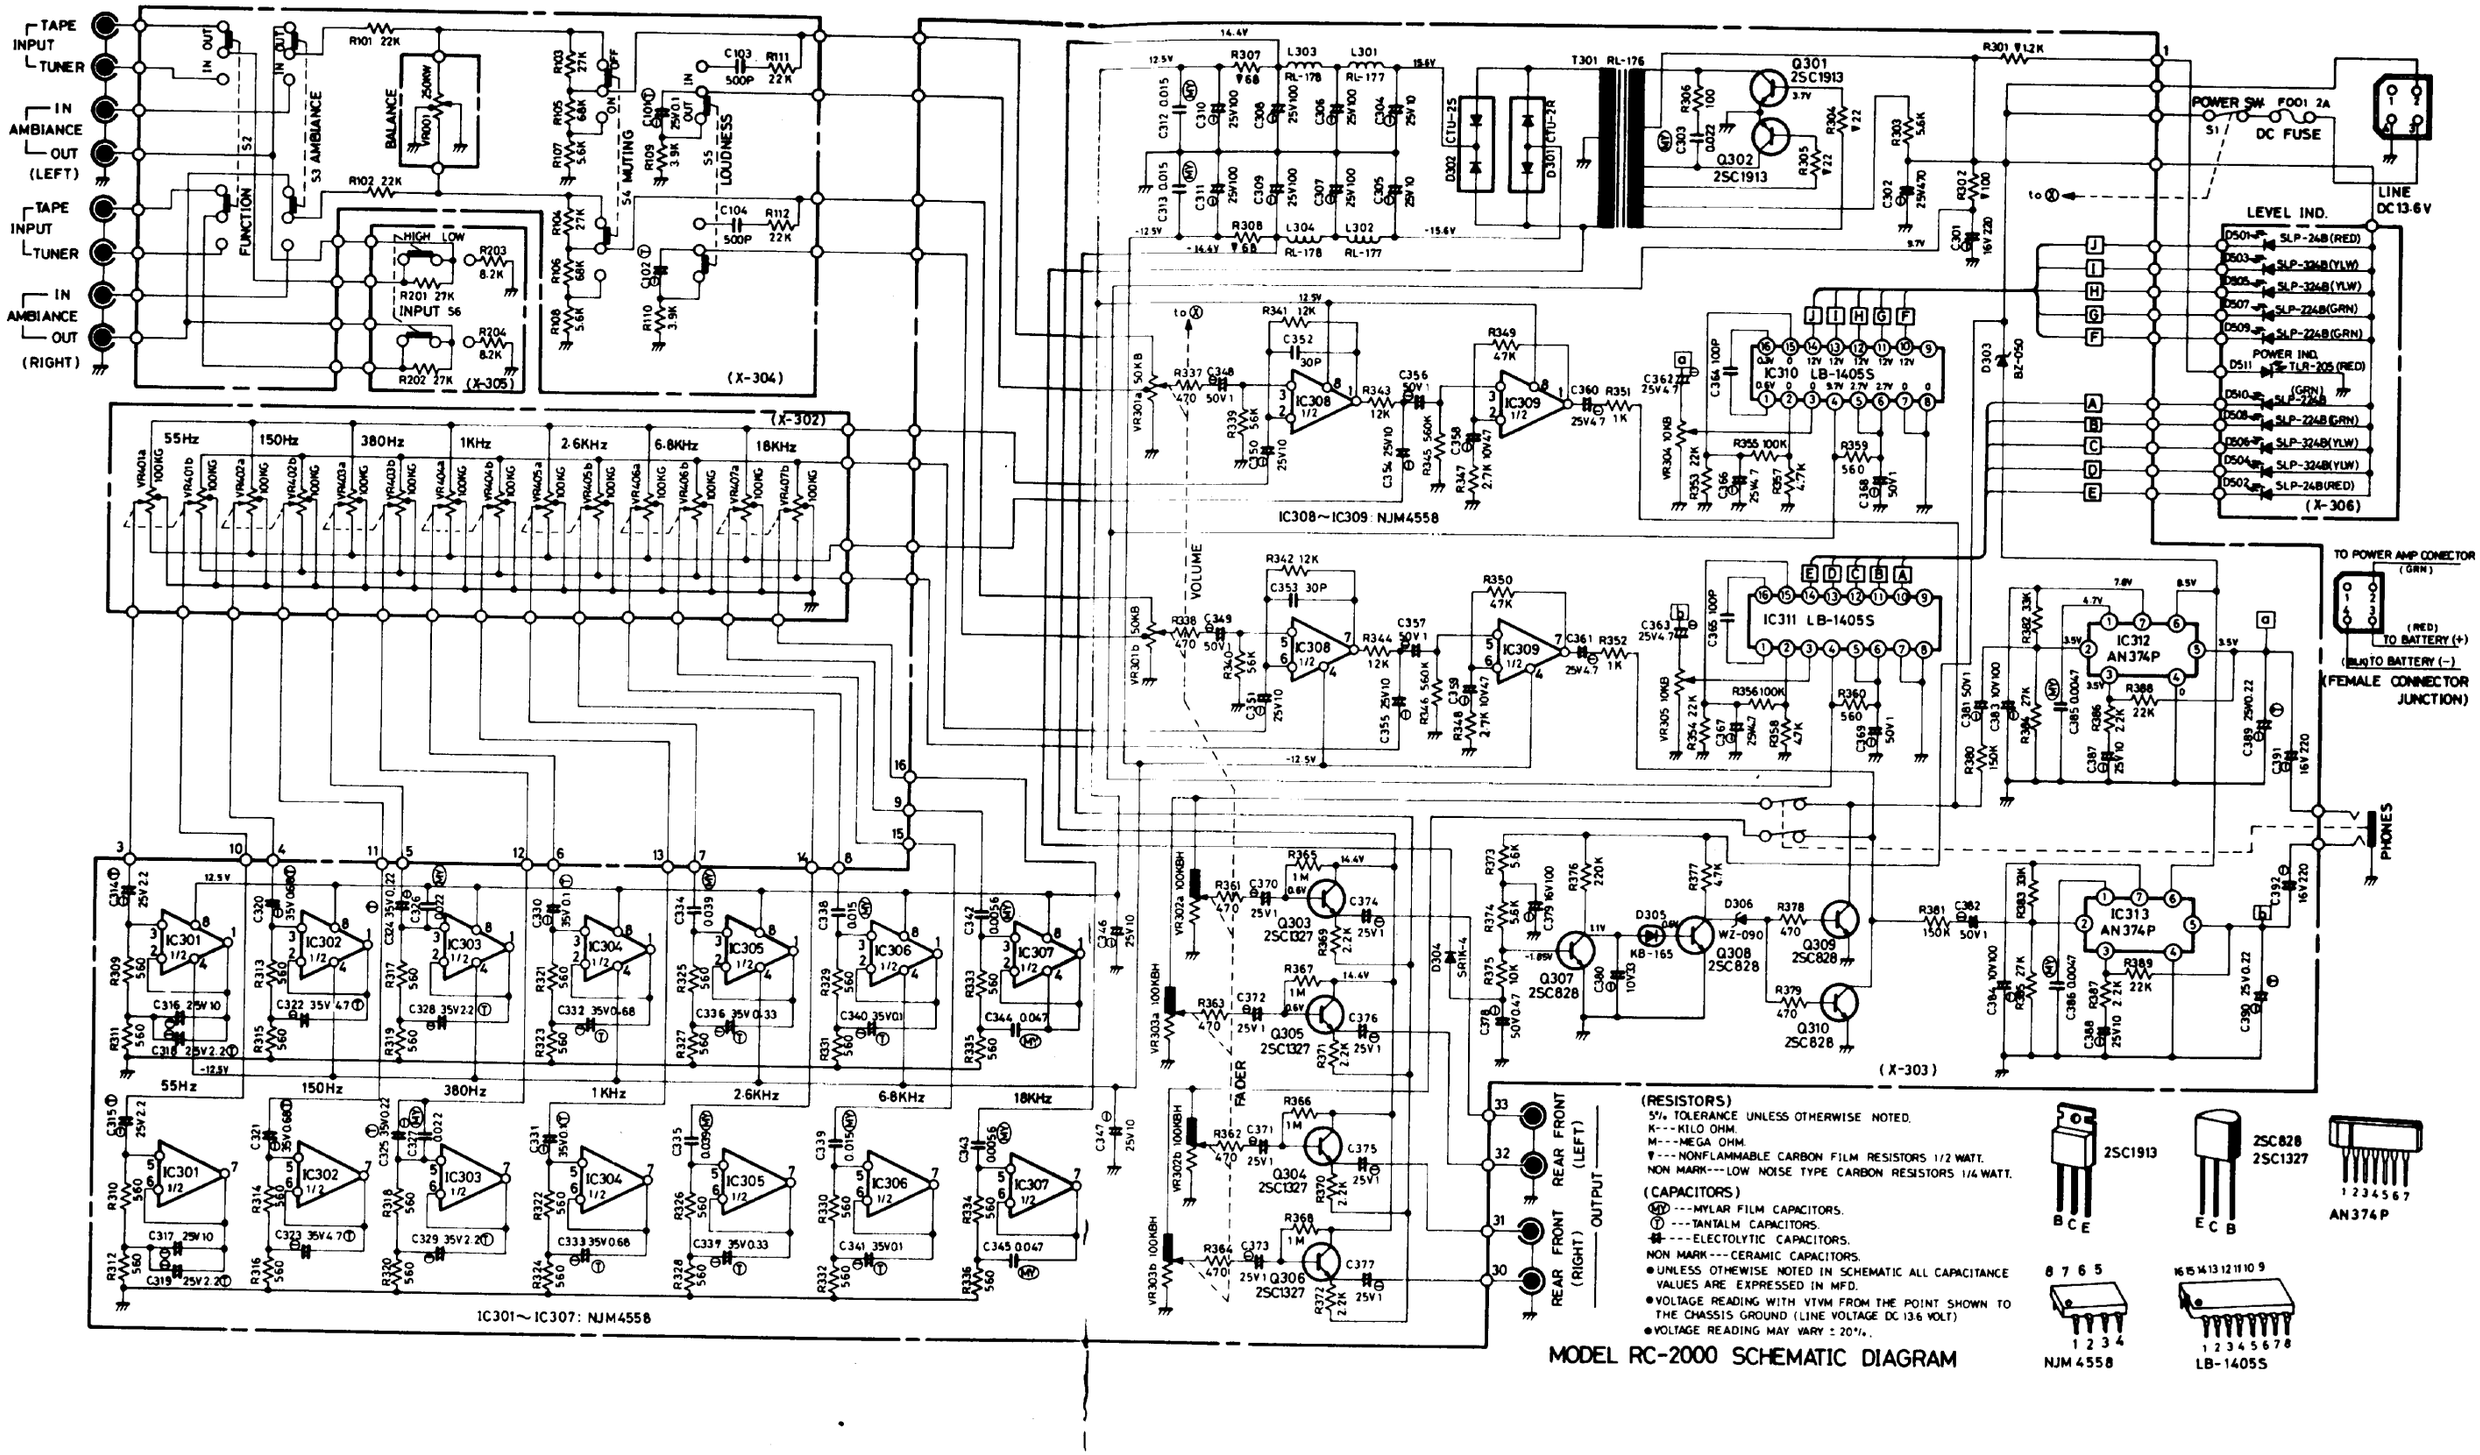

(RESISTORS)
5% TOLERANCE UNLESS OTHERWISE NOTED.
K---KILO OHM.
M---MEGA OHM.
▼---NONFLAMMABLE CARBON FILM RESISTORS 1/2 WATT.
NON MARK---LOW NOISE TYPE CARBON RESISTORS 1/4 WATT.

(CAPACITORS)
(MY)---MYLAR FILM CAPACITORS.
(T)---TANTALM CAPACITORS.
(E)---ELECTOLYTIC CAPACITORS.
NON MARK---CERAMIC CAPACITORS.

- UNLESS OTHEWISE NOTED IN SCHEMATIC ALL CAPACITANCE VALUES ARE EXPRESSED IN MFD.
- VOLTAGE READING WITH VTVM FROM THE POINT SHOWN TO THE CHASSIS GROUND (LINE VOLTAGE DC 13.6 VOLT)
- VOLTAGE READING MAY VARY ± 20%.

MODEL RC-2000 SCHEMATIC DIAGRAM