

# Technical Manual



# JBL4675A

## SPECIFICATIONS

### ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 8 ohm
- Power Rating: Continuous Pink Noise: 300W  
Continuous Program: 600W
- Frequency Response: 35 Hz to 20 kHz
- Sensitivity: 100 dB SPL\*
- Crossover Frequencies: 500 Hz

### SYSTEM COMPONENTS:

- Cabinet: C4508
- Grille: N/A
- Low Frequency Transducer: 380mm (15 in.) Cone Transducer (2), 2225H

\*1 Watt (2.83 V RMS) @ 1 Meter

### SYSTEM COMPONENTS: (cont'd)

- High Frequency Transducer: 100mm (4 in.) Pure Titanium Diaphragm, 2445J
- Crossover Network: 3160


### PHYSICAL SPECIFICATIONS:

- Enclosure Dimensions: 1797mm x 770mm x 949mm D  
(70.75 x 30.31 x 37.37 in. D)
- Shipping Weight: 215 lbs.


### WARRANTY INFORMATION:

- Refer to the Warranty Statement packed with each product.

## PACKAGE

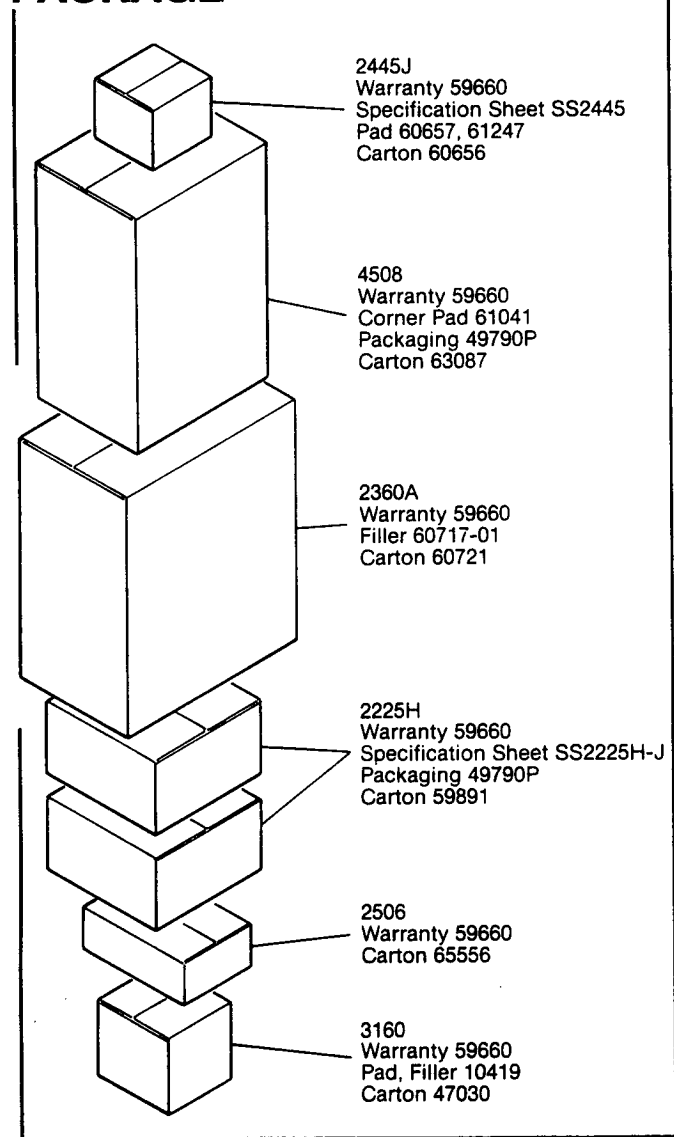

## WIRING DIAGRAM

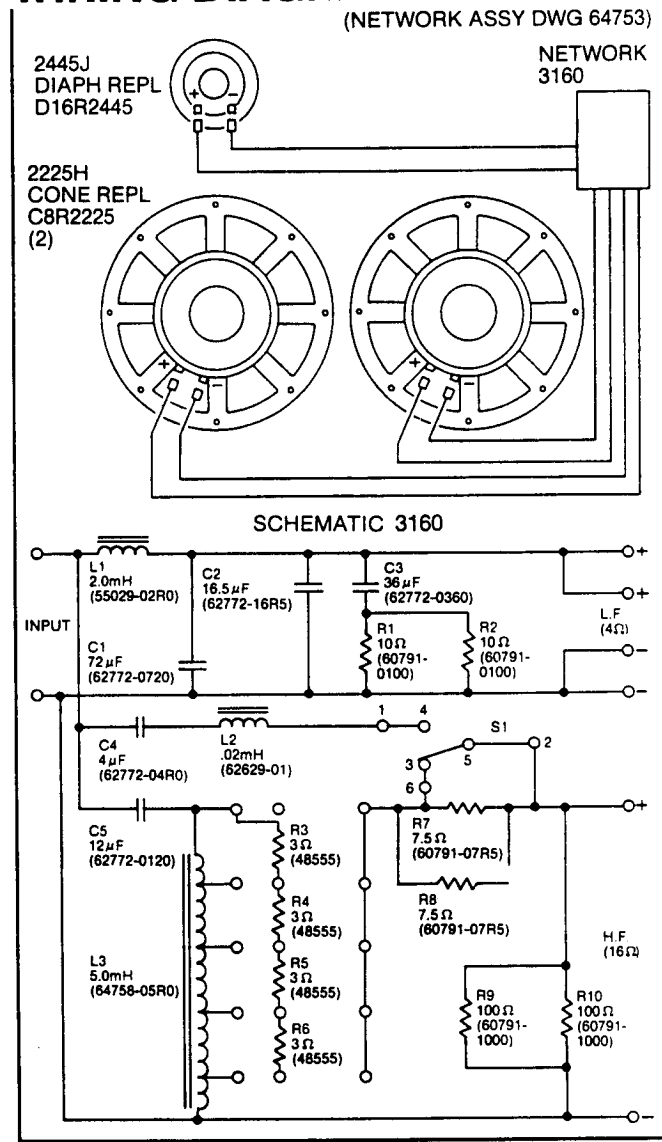

# JBL4675A

## COMPONENT EXPLODED VIEW

Horn 2360A  
60691  
Use Mounting Hardware  
Included With  
Installation Kit 60719

Bolt (Ref)

Speaker High Freq  
2445J  
Diaph Repl  
D16R2445  
Use Mounting Hardware  
Included With  
Installation Kit 57536

Washer, (2) Nut (Ref)

Screw (Ref)

Support 2506  
62607  
Use Mounting Hardware  
Included With Unit

Network 3160  
64753  
Use Mounting Hardware  
Included With  
Installation Kit 56911

Screw  
(Ref)

Port Tube  
56144  
(Not For Sale)

Gasket, Vinyl  
34499 (2)

Cabinet 4508  
60375

Screw  
(Ref)

Speaker Low Freq (2)  
2225H  
Cone Repl  
C8R2225  
Use Mounting Hardware  
Included With  
Installation Kit 55340

JBL4675A

