


# Technical Manual

# L26A Decade

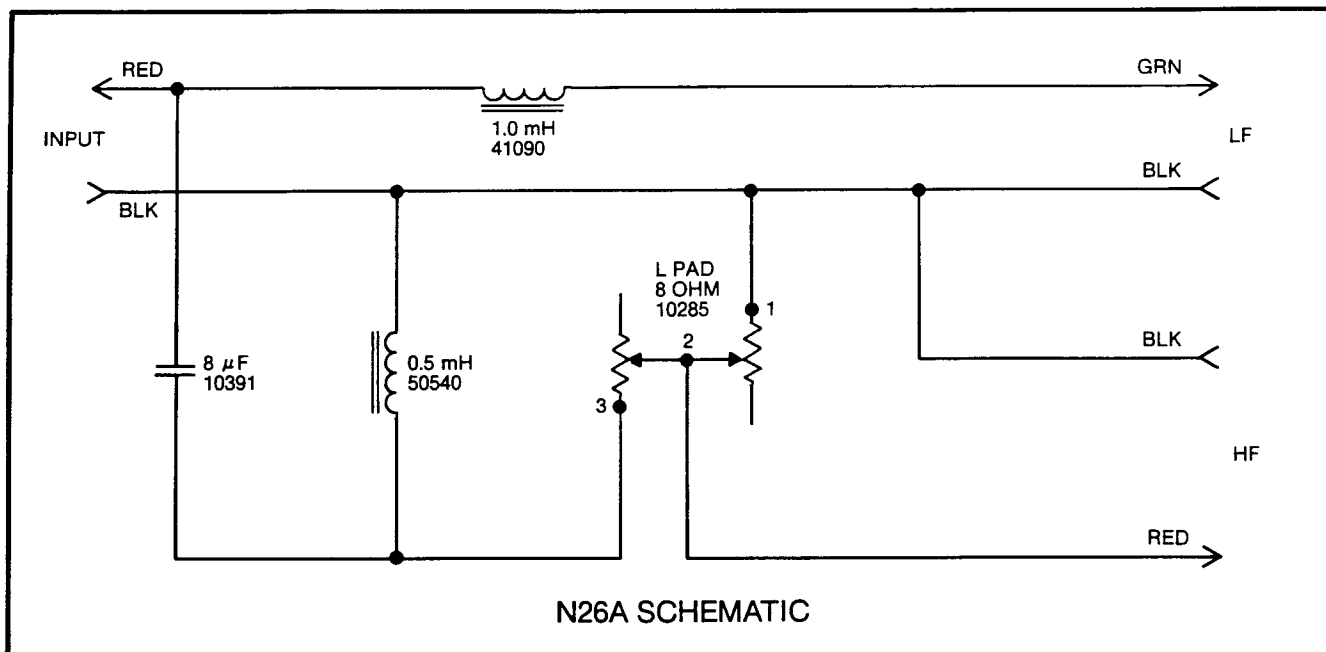

## SYSTEM COMPONENTS:

<b>LOW FREQUENCY DRIVER:</b>	125A
Cone Kit:	C8R127A
Nom. Impedance:	8 Ohm
Dynamic Test Input V:	5
Sweep Frequency Hz:	30-1200
D.C. Resistance Ohms:	4.7 minimum 5.7 maximum
Gap Gauge:	.044"
Notes:	Dome Inverted
If Not Serviceable,	
Replace With:	125HR
Visual Change:	Yes
Baffle Modification:	No
Exact Acoustic Replacement:	No.
	Slightly different. Replace both units in a stereo pair.
Additional Parts Currently Available*:	
Dome:	50201
Terminal Board:	52348
Mounting Gasket:	52089
Trim Gasket:	52315
<b>HIGH FREQUENCY DRIVER:</b>	LE25-4
Diaphragm Kit:	D8RLE254
Nom. Impedance:	8 Ohm
Dynamic Test Input V:	3
Sweep Frequency Hz:	500-1200
D.C. Resistance Ohms:	3.7 minimum 4.2 maximum

## HIGH FREQUENCY DRIVER (Cont'd)

Gap Gauge:	.029"
Notes:	Kit includes parts for similar models. Use required parts only.
If Not Serviceable,	
Replace With:	035TiA
Visual Change:	Yes
Baffle Modification:	Yes
Exact Acoustic Replacement:	No.
	Slightly different. Replace both units in a stereo pair.
Additional Parts Currently Available*:	
Trim Ring:	54279
Mounting Gasket:	50949-01
Dome:	21606

## SYSTEM SPECIFICATIONS:

Nominal Impedance:	8 Ohm
Power Capacity:	35 Watts
	Continuous Program
Crossover Frequency:	2000 Hz
Sensitivity:	76dB (1 Watt @ 15 Feet)
Enclosure Dim:	12-3/4" x 24" x 13-1/4" D
	324mm x 610mm x 336mm
Shipping Weight:	42 lbs. - 19 kg.
Additional Parts Currently Available*:	
Binding Posts: Red:	56131
Black:	56130

\*Other parts may also be available. Check with JBL for details.