


Technical Manual



JBL4782 DUAL 300 MM (12") TRIPLE CHAMBER BAND-PASS™ SUB-BASS SYSTEM

SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 4 ohm
- Power Rating: Continuous Program: 600W
- Frequency Response: 35 Hz to 150 Hz (± 3 dB)
- Sensitivity: 101 dB SPL*
- Crossover Frequencies: 80 Hz to 120 Hz, 25 Hz Low Cut

SYSTEM COMPONENTS:

- Cabinet: C4782
- Grille: G4782

*1 Watt (2.83 V RMS) @ 1 Meter

SYSTEM COMPONENTS: (cont'd)

- Low Frequency Transducer: 300mm (12 in.) Cone Transducer (2204H) (2)
- Crossover Network: JBL/UREI 5235 Active Crossover


PHYSICAL SPECIFICATIONS:

- Enclosure Dimensions: 620mm x 1050mm x 550mm D (24.37 x 41.37 x 21.62 in. D)
- Shipping Weight: 121 lbs. (55 kg)

WARRANTY INFORMATION:

- Refer to the Warranty Statement packed with each product.

WIRING DIAGRAM

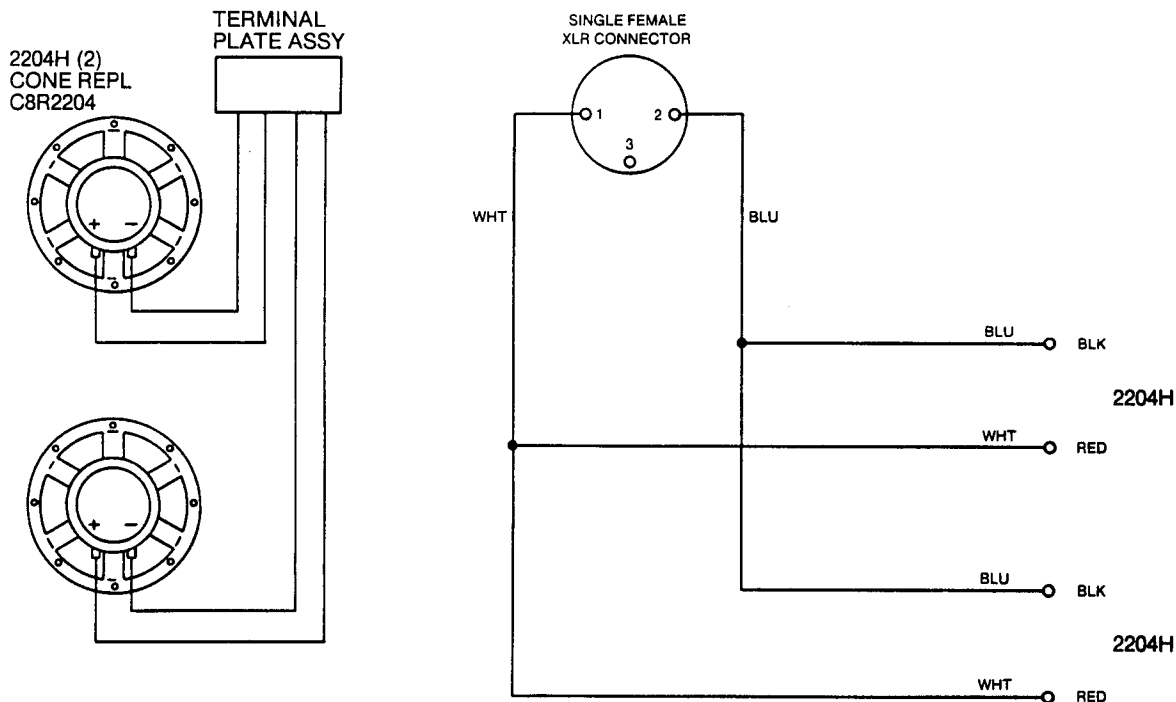

PACKAGE

Wood Shipping Crate

JBL4782

COMPONENT EXPLODED VIEW

