



CF100

SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 8 ohm
- Recommended Amp Power: 10W to 175W
- Frequency Response: 39 Hz to 20 kHz (-6 dB)
- Sensitivity: 94dB SPL*
- Crossover Frequencies: 1400 Hz and 7 kHz

SYSTEM COMPONENTS:

- Cabinet: CCF100 (B16140653)
Not For Sale
- Grille: GCF100 (B6940131)
- Low Frequency Transducer: C250L49U1070
- DC Resistance: 6 ohm ±15%
- Mid Range Transducer: 4-1/2 in. (114mm)
C110M16U1070
- DC Resistance: 8.0 ohm ±15%

*1 Watt @ 1 Meter

SYSTEM COMPONENTS: (cont'd)

- High Frequency Transducer: (14mm) Ti Laminate
14R7D08RRH0094
- DC Resistance: 6 ohm ±10%
- Crossover Network/ Terminal Cup: B6034149

AURAL SWEEP TEST SPECIFICATIONS:

- A. System Aural Sweep Test: 5.0V Input, 20 Hz to 20 kHz
- B. L.F. Aural Sweep Test: 5.0V Input, 50 Hz to 5 kHz
- C. M.F. Aural Sweep Test: 4.0V Input, 700 Hz to 5 kHz
- D. H.F. Aural Sweep Test: 2.0V Input, 1 kHz to 20 kHz

PHYSICAL SPECIFICATIONS:

- Enclosure Dimensions: 27.0 x 12.81 x 11.68 in. D
(686mm x 325mm x 297mm D)


SHIPPING WEIGHT:

36 lbs. (16.3 kg.)


WARRANTY INFORMATION:

- Refer to the Warranty Statement packed with each product.

PACKAGE

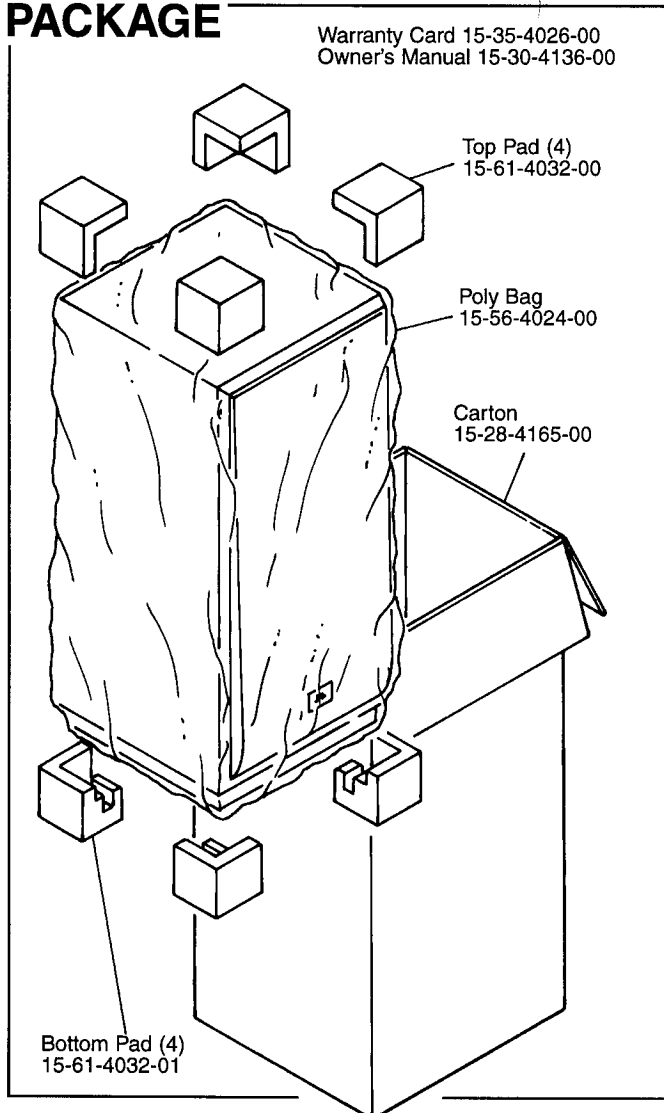


WIRING DIAGRAM

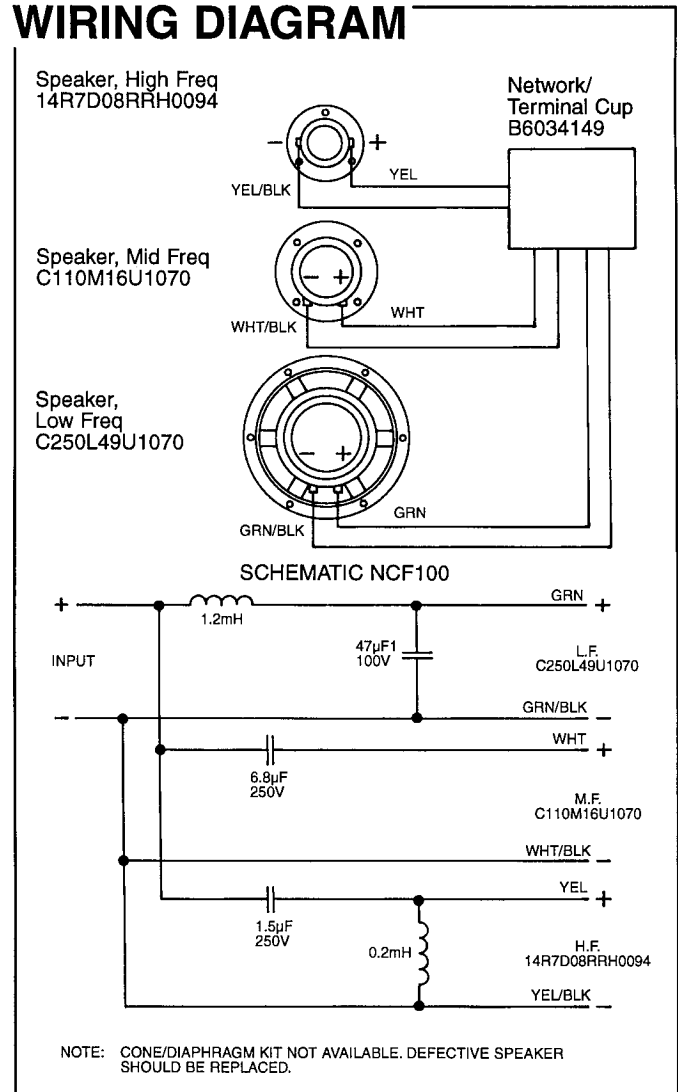

CF100

CF100

COMPONENT EXPLODED VIEW

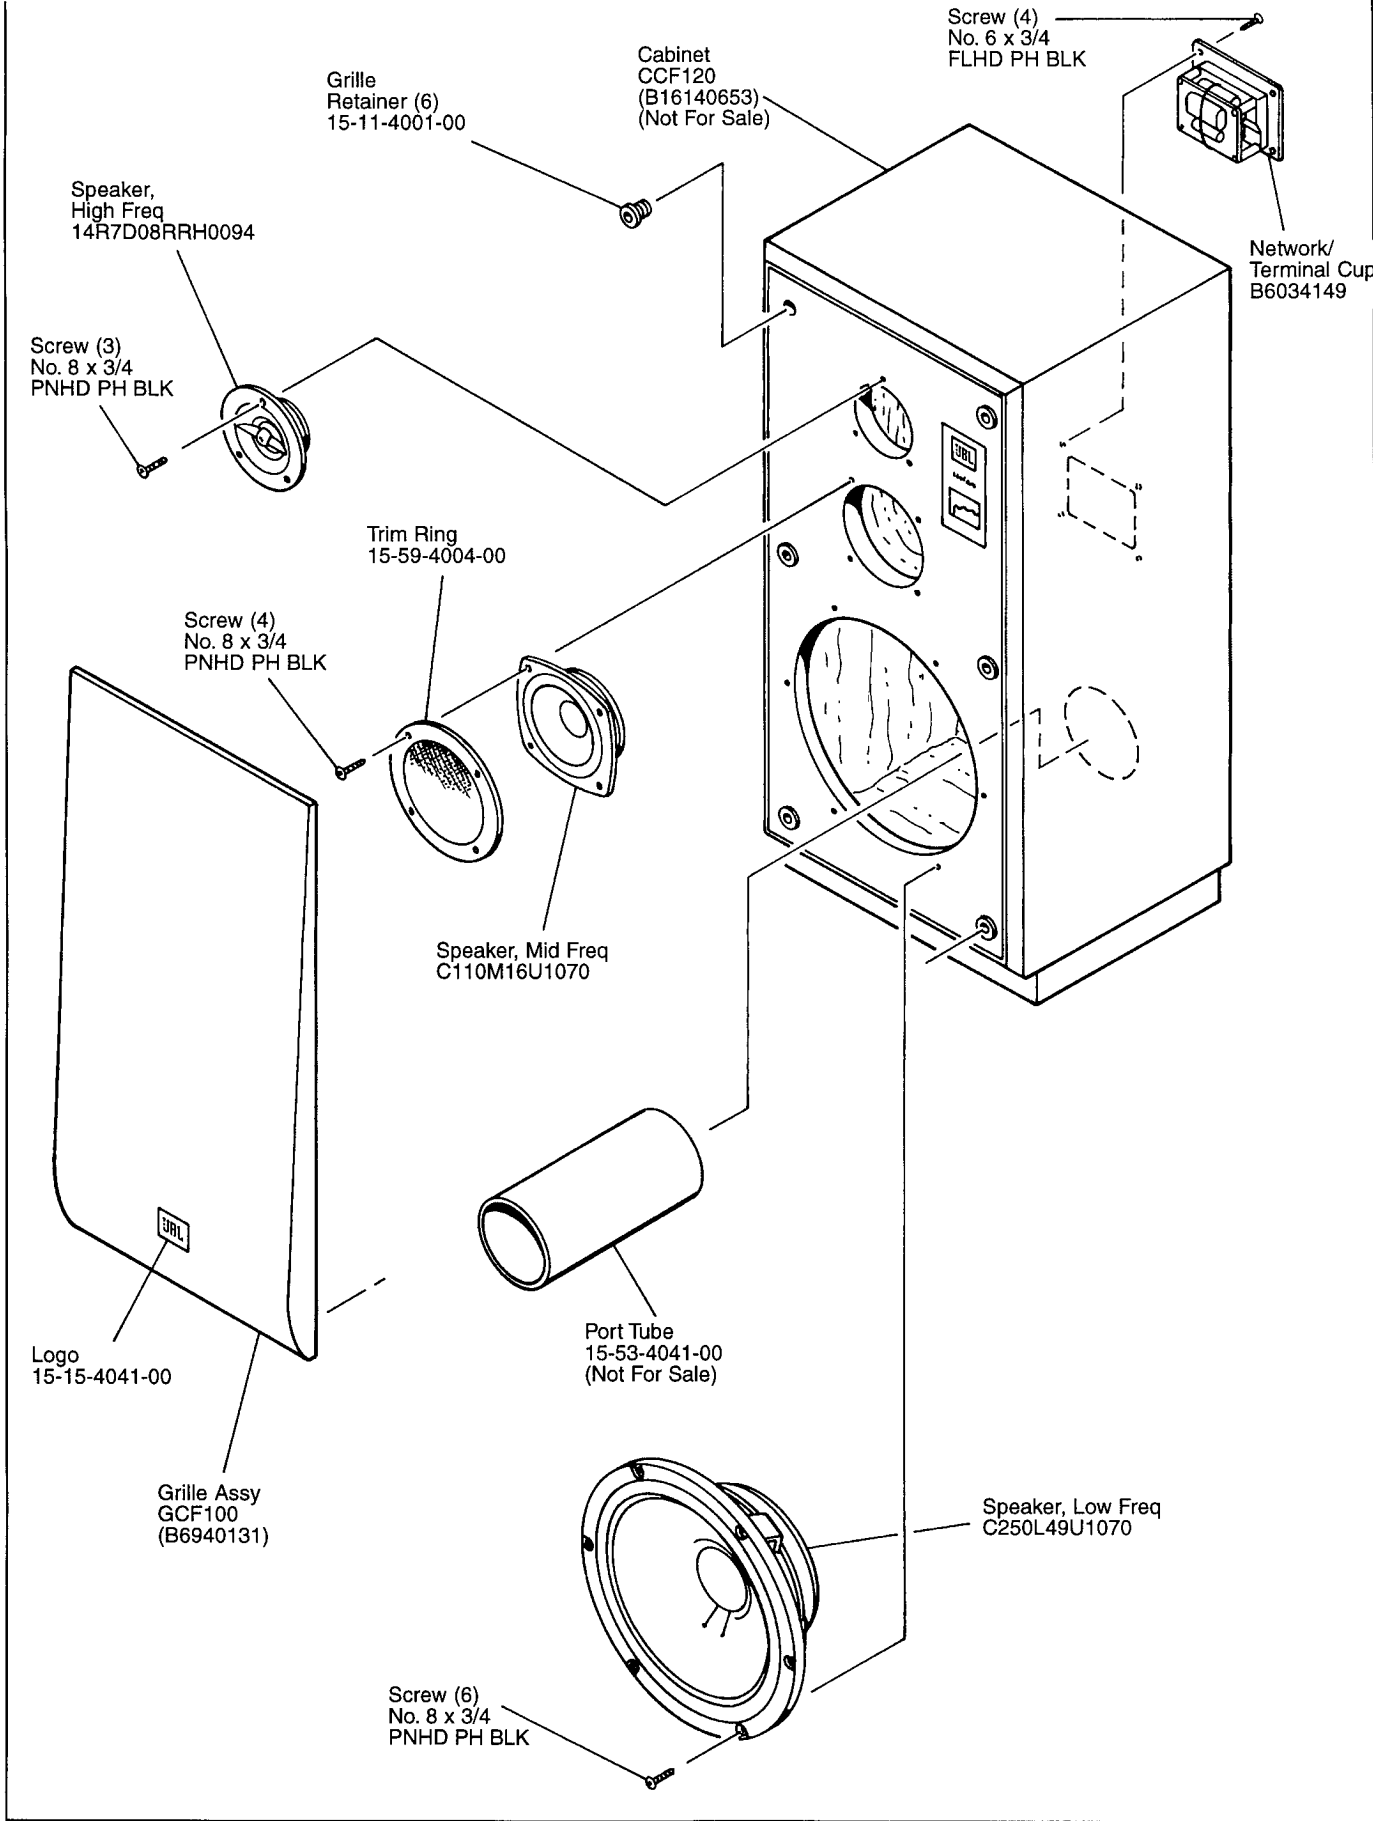

CF120