


Technical Manual

L55 Lancer

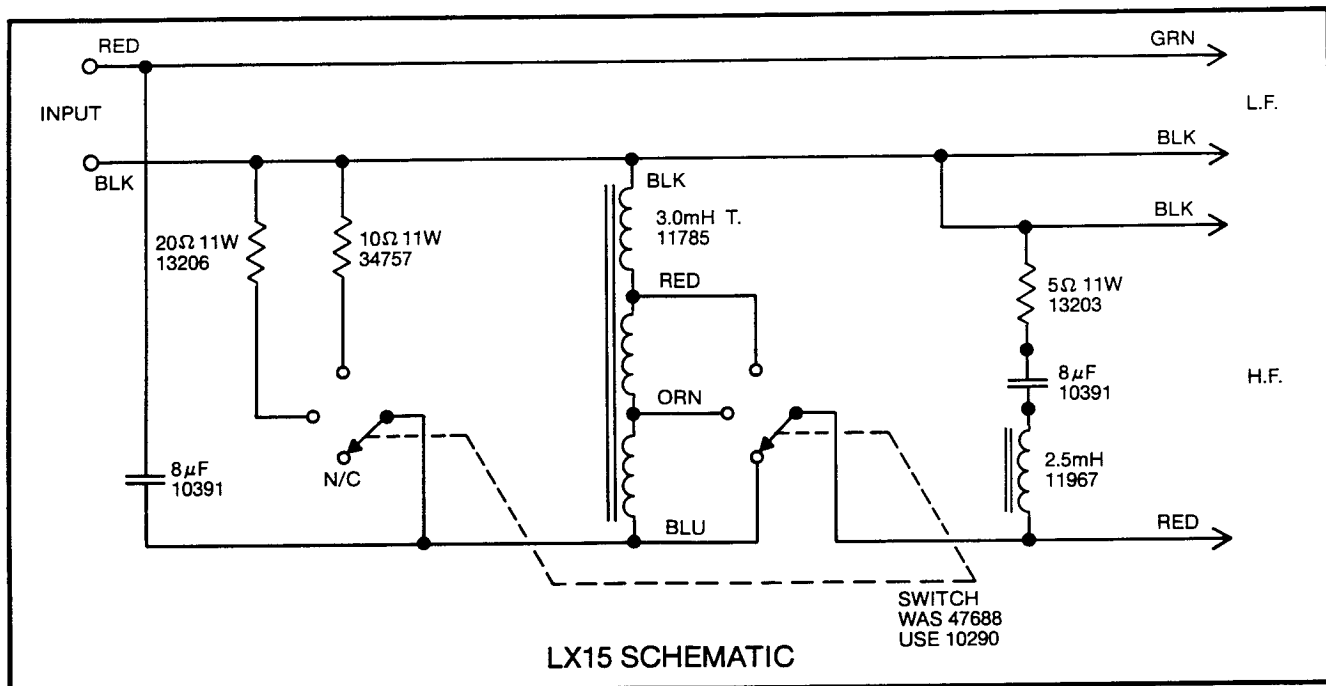

SYSTEM COMPONENTS:

LOW FREQUENCY DRIVER:

LE14A	Cone Kit:	C8RLE14A
	Nom. Impedance:	8 Ohm
	Dynamic Test Input V:	8
	Sweep Frequency Hz:	30-1200
	D.C. Resistance Ohms:	5.9 minimum 7.1 maximum
	Gap Gauge:	.057"
	Notes:	Aquaplas On Front And Back Of Cone

If Not Serviceable,

Replace With:	LE14H-1
Visual Change:	Yes
Baffle Modification:	No
Exact Acoustic Replacement:	No.
	Slightly different. Replace both units in a stereo pair.

Additional Parts Currently Available*:

Dome:	50201
Mounting Gasket:	20253
Trim Gasket:	21811

HIGH FREQUENCY DRIVER:

LE20-1	Diaphragm Kit:	D8RLE20
	Nom. Impedance:	8 Ohm
	Dynamic Test Input V:	6

HIGH FREQUENCY DRIVER (Cont'd)

Sweep Frequency Hz:	1000-6000
D.C. Resistance Ohms:	3.7 minimum 4.2 maximum
Gap Gauge:	.029"
Notes:	Test With Network
If Not Serviceable,	
Replace With:	035TiA
Visual Change:	Yes
Baffle Modification:	No
Exact Acoustic Replacement:	No. Use as a last resort. Replace both units in a stereo pair.
Additional Parts Currently Available*:	
Trim Ring:	21600

SYSTEM SPECIFICATIONS:

Nominal Impedance:	8 Ohm
Power Capacity:	35 Watts
	Continuous Program
Crossover Frequency:	2000 Hz
Sensitivity:	80dB (1 Watt @ 15 Feet)
Enclosure Dim:	24-5/8" x 17-1/2" x 12-7/8" D 62cm x 44cm x 33cm
Shipping Weight:	68 lbs. - 31 kg.
Additional Parts Currently Available*:	
Binding Posts:	Red: 10243 Black: 10244

*Other parts may also be available. Check with JBL for details.