


L100A Century (Late Model)

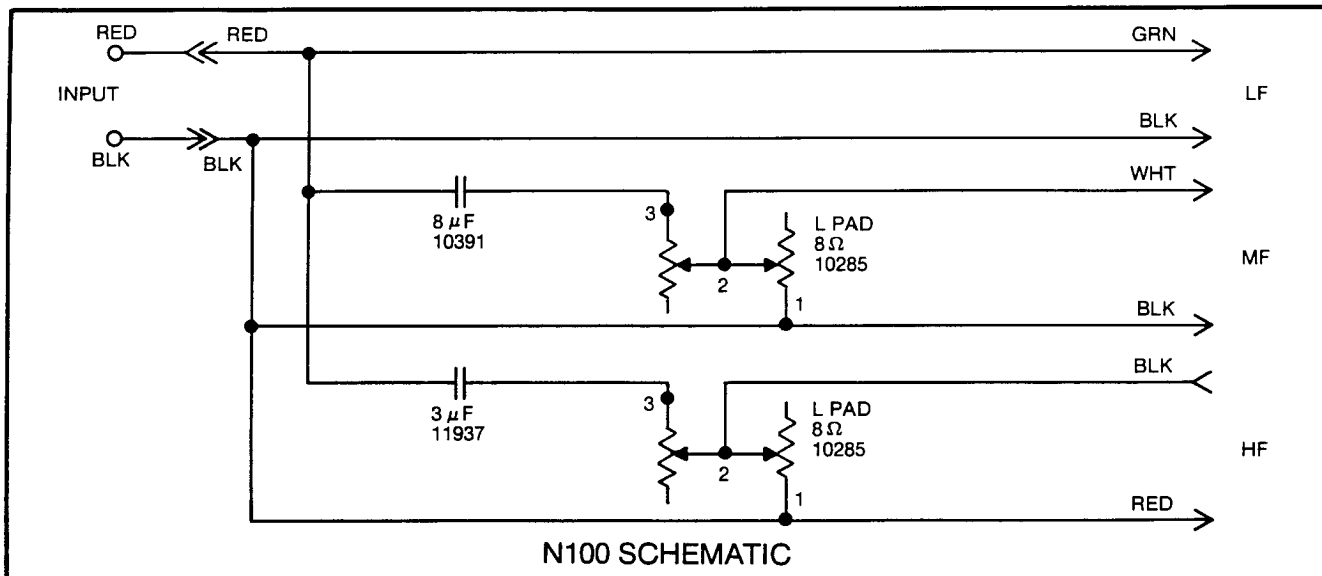

SYSTEM COMPONENTS:

LOW FREQUENCY DRIVER:

123A-3
Cone Kit: C8R2213
Nom. Impedance: 8 Ohm
Dynamic Test Input V: 6
Sweep Frequency Hz: 20-1200
D.C. Resistance Ohms: 4.5 minimum
5.5 maximum
Gap Gauge: .048"
Notes: Aquaplas

If Not Serviceable,
Replace With: 2213H
Visual Change: Yes
Baffle Modification: No
Exact Acoustic Replacement: No.
Slightly different. Replace both units
in a stereo pair.

Additional Parts Currently Available*:

Dome: 31385
Trim Gasket: 32756

MID RANGE DRIVER:

LE5-2
Cone Kit: C8RLE52
Nom. Impedance: 8 Ohm
Dynamic Test Input V: 4
Sweep Frequency Hz: 75-3000
D.C. Resistance Ohms: 5.5 minimum
6.5 maximum
Gap Gauge: .040"
Notes: Dome Inverted

If Not Serviceable,
Replace With: LE5-10
Visual Change: Yes
Baffle Modification: No
Exact Acoustic Replacement: No.
Slightly different. Replace both units
in a stereo pair.

MID RANGE DRIVER (Cont'd)

Additional Parts Currently Available*:

Dome: 54721
Trim Gasket: 29931

HIGH FREQUENCY DRIVER:

LE25
Diaphragm Kit: D8RLE25
Nom. Impedance: 8 Ohm
Dynamic Test Input V: 3
Sweep Frequency Hz: 500-1200
D.C. Resistance Ohms: 3.7 minimum
4.2 maximum
Gap Gauge: .029"

Notes:
If Not Serviceable,
Replace With: 035TiA
Visual Change: Yes
Baffle Modification: Yes
Exact Acoustic Replacement: No.
Slightly different. Replace both units
in a stereo pair.

Additional Parts Currently Available*:

Trim Ring: 50402
Mounting Gasket: 50949-01
Dome: 21606

SYSTEM SPECIFICATIONS:

Nominal Impedance: 8 Ohm
Power Capacity: 50 Watts
Continuous Program
Crossover Frequencies: 1500 Hz, 6000 Hz
Sensitivity: 78dB (1 Watt @ 15 Feet)
Enclosure Dim: 14-1/4" x 23-1/2" x 13-5/8" D
36.2cm x 59.7cm x 34.6cm
Shipping Weight: 55 lbs. - 25 kg.
Additional Parts Currently Available*:
Grill: G100-Cloth
Binding Posts: Red: 56131
Black: 56130

*Other parts may also be available. Check with JBL for details.