


L88 Nova/ L88-1 Cortina

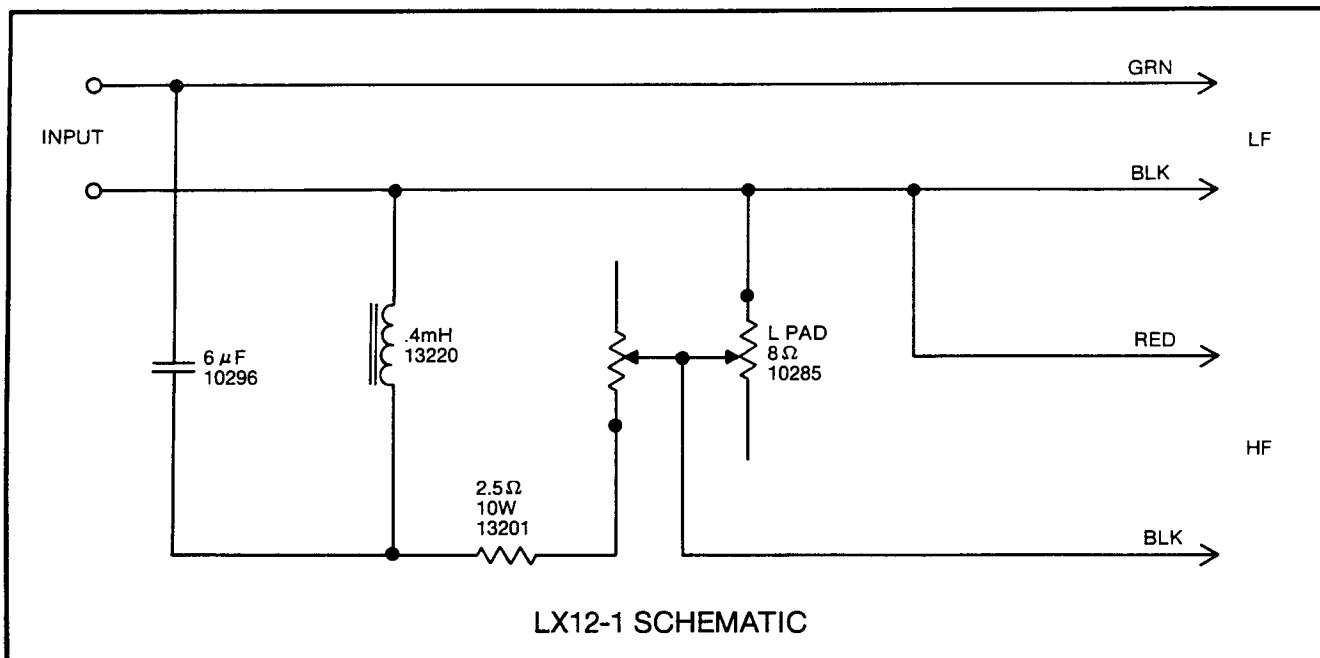

SYSTEM COMPONENTS:

LOW FREQUENCY DRIVER:

123A-1	123A-1
Cone Kit:	C8R2212
Nom. Impedance:	8 Ohm
Dynamic Test Input V:	6
Sweep Frequency Hz:	20-1200
D.C. Resistance Ohms:	4.5 minimum 5.5 maximum
Gap Gauge:	.044"
Notes:	Aquaplas
If Not Serviceable, Replace With:	2213H (Reverse Polarity)
Visual Change:	Yes
Baffle Modification:	No
Exact Acoustic Replacement:	No. Slightly different. Replace both units in a stereo pair.
Additional Parts Currently Available*:	
Dome:	31385
Trim Gasket:	32756

HIGH FREQUENCY DRIVER:

LE20-1	LE20-1
Diaphragm Kit:	D8RLE20
Nom. Impedance:	8 Ohm
Dynamic Test Input V:	6
Sweep Frequency Hz:	1000-6000

HIGH FREQUENCY DRIVER (Cont'd)

D.C. Resistance Ohms:	3.7 minimum 4.2 maximum
Gap Gauge:	.029"
Notes:	Test With Network
If Not Serviceable, Replace With:	035TiA
Visual Change:	Yes
Baffle Modification:	No
Exact Acoustic Replacement:	No. Use as a last resort. Replace both units in a stereo pair.
Additional Parts Currently Available*:	
Trim Ring:	21600

SYSTEM SPECIFICATIONS:

Nominal Impedance:	8 Ohm
Power Capacity:	50 Watts
	Continuous Program
Crossover Frequency:	2000 Hz
Sensitivity:	76dB (1 Watt @ 15 Feet)
Enclosure Dim:	14" x 23-1/2" x 11-3/4" D 36cm x 60cm x 30cm
Shipping Weight:	47 lbs. - 21 kg.
Additional Parts Currently Available*:	
Grill:	G88-Cloth
Binding Posts: Red:	10243
Black:	10244

*Other parts may also be available. Check with JBL for details.