


Technical Manual

L88A Nova

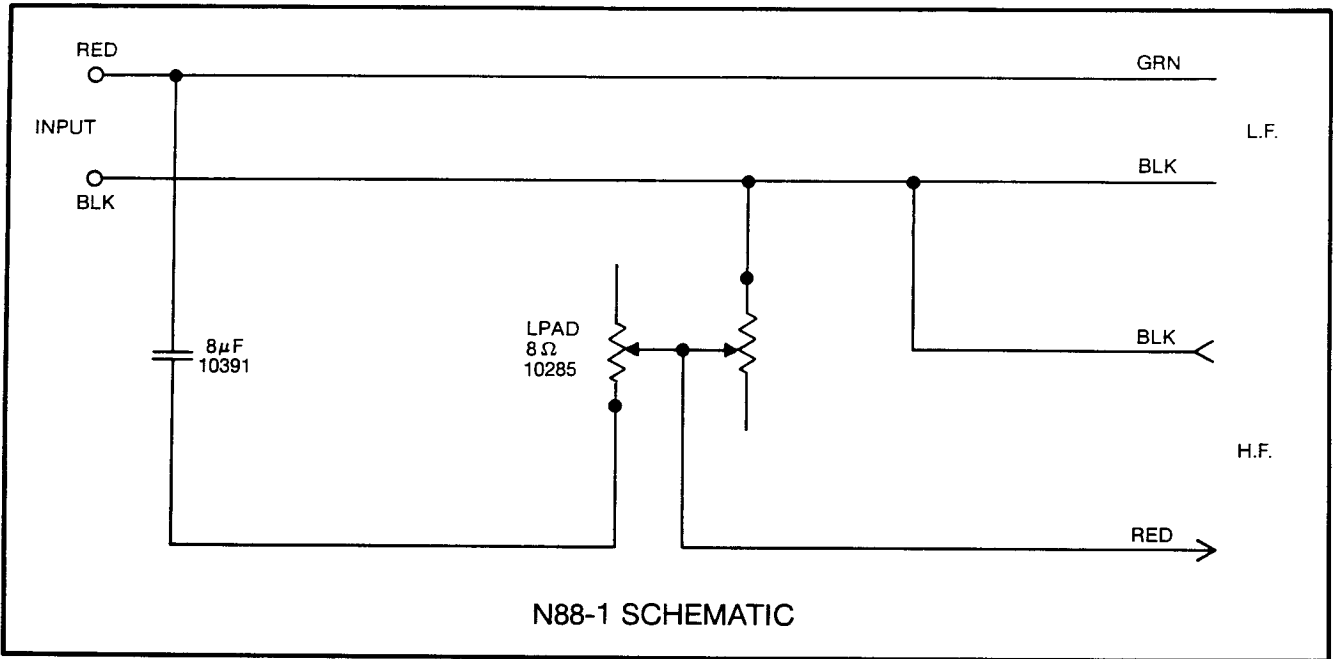

SYSTEM COMPONENTS:

LOW FREQUENCY DRIVER:	123A-1
Cone Kit:	C8R2212
Nom. Impedance:	8 Ohm
Dynamic Test Input V:	6
Sweep Frequency Hz:	20-1200
D.C. Resistance Ohms:	4.5 minimum 5.5 maximum
Gap Gauge:	.044"
Notes:	Aquaplas
If Not Serviceable,	
Replace With:	2213H (Reverse Polarity)
Visual Change:	Yes
Baffle Modification:	No
Exact Acoustic Replacement:	No.
	Slightly different. Replace both units in a stereo pair.
Additional Parts Currently Available*:	
Dome:	31385
Trim Gasket:	32756
HIGH FREQUENCY DRIVER:	LE25
Diaphragm Kit:	D8RLE25
Nom. Impedance:	8 Ohm
Dynamic Test Input V:	3
Sweep Frequency Hz:	500-1200
D.C. Resistance Ohms:	3.7 minimum 4.2 maximum

HIGH FREQUENCY DRIVER (Cont'd)

Gap Gauge:	.029"
Notes:	
If Not Serviceable,	
Replace With:	035TiA
Visual Change:	Yes
Baffle Modification:	Yes
Exact Acoustic Replacement:	No.
	Slightly different. Replace both units in a stereo pair.
Additional Parts Currently Available*:	
Trim Ring:	50402
Mounting Gasket:	50949-01
Dome:	21606

SYSTEM SPECIFICATIONS:

Nominal Impedance:	8 Ohm
Power Capacity:	35 Watts
	Continuous Program
Crossover Frequency:	2000 Hz
Sensitivity:	76dB (1 Watt @ 15 Feet)
Enclosure Dim:	14" x 23-1/2" x 11-3/4" D
	36cm x 60cm x 30cm
Shipping Weight:	47 lbs. - 21 kg.
Additional Parts Currently Available*:	
Grill:	G88-Cloth
Binding Posts: Red:	10243
Black:	10244

*Other parts may also be available. Check with JBL for details.