


Technical Manual

S38 Baron

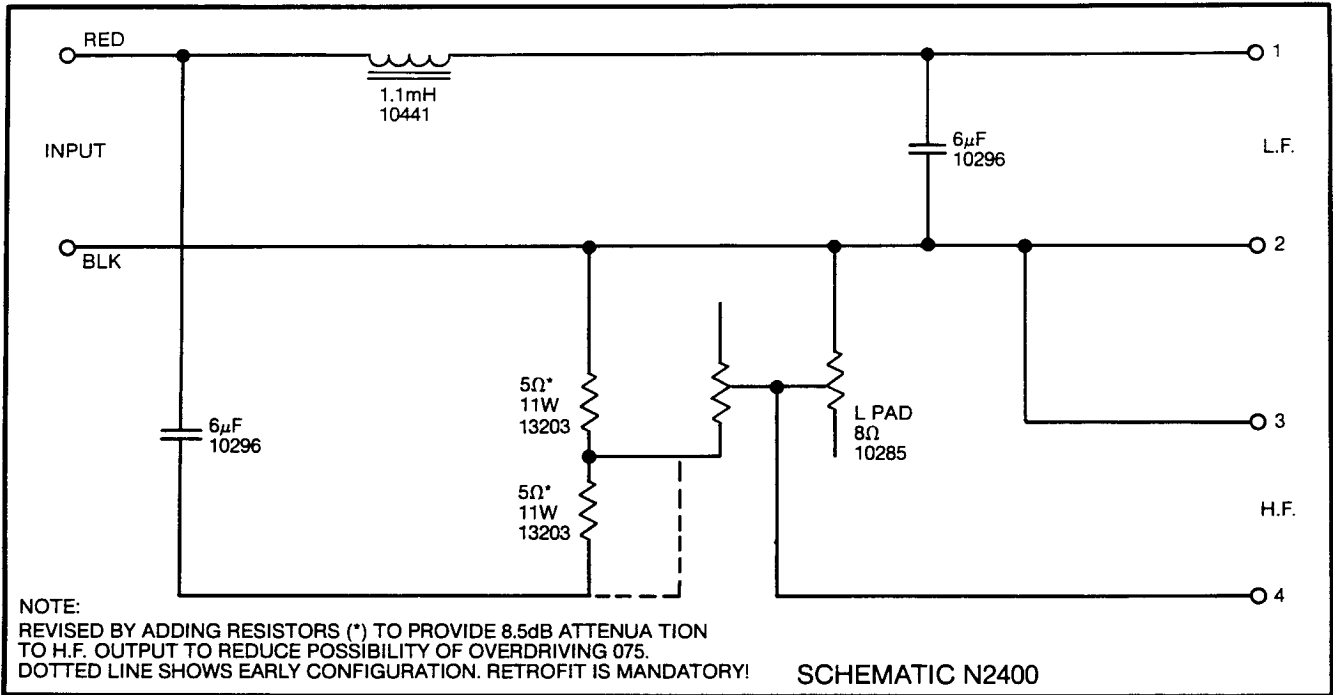

SYSTEM COMPONENTS:

LOW FREQUENCY DRIVER:	
D130	D130
Cone Kit:	C8RE130
Nom. Impedance:	8 Ohm
Dynamic Test Input V:	10
Sweep Frequency Hz:	20-1200
D.C. Resistance Ohms:	5.8 min/6.8 max
Gap Gauge:	.057"
Notes:	
If Not Serviceable, Replace With:	E130-8
Visual Change:	Yes
Baffle Modification:	No
Exact Acoustic Replacement:	No. Slightly different.
	Replace both units in a stereo pair.
Additional Parts Currently Available*:	
Dome:	21060
Mounting Gasket:	34499
Trim Gasket:	21058
HIGH FREQUENCY DRIVER:	
Diaphragm Kit:	D8R075
Nom. Impedance:	8 Ohm

HIGH FREQUENCY DRIVER (Cont'd)

Dynamic Test Input V:	7
Sweep Frequency Hz:	1000-3000
D.C. Resistance Ohms:	5.7 min/6.7 max
Gap Gauge:	.025"
Notes:	Do not crease diaphragm. Test with network.
If Not Serviceable, Replace With:	Currently Available
Can Also be replaced with:	2402H
Visual Change:	Yes
Baffle Modification:	No
Exact Acoustic Replacement:	Yes
Additional Parts Currently Available*:	
Mounting Gasket:	51795

SYSTEM SPECIFICATIONS:

Nom. Impedance:	8 ohm
Power Capacity:	60 Watts Continuous Program
Crossover Frequency:	2500 Hz
Sensitivity:	88dB (1 Watt @ 15 Feet)
Enclosure Dim:	25" x 24" x 16" D 635mm x 610mm x 406mm

*Other parts may also be available. Check with JBL for details.