


LX6GR



SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- * Nominal Impedance: 8 ohm
- * Recommended Amp Power: 10-125W
- * Frequency Response: 45 Hz - 20 kHz (-6dB)
- * Sensitivity: 87 dB / 2,83V / 1 m
- * Crossover frequency: 3 kHz

SYSTEM COMPONENTS:

- * Cabinet: CLX6GR (Not for sale)
- * Grille: GLX6GR (2408980)
- * Woofer: NJ170-5 165mm Woofer
30mm voice coil
- DC Resistance: 4,8 ohm

SYSTEM COMPONENTS: (cont'd)

- * Tweeter: NJ026T 25mm
Titanium Dome Tweeter
- DC Resistance: 4,3 ohm
- * Crossover Network: NLX6GR (2709100)


PHYSICAL SPECIFICATIONS:

- * Enclosure Dimensions (H.W.D): 31,5x8,7x11,1 In. D
(800x220x283mm D)
- * Shipping Weight: 31 lbs. (14 kg.)


WARRANTY INFORMATION:

- * Refer to the Warranty Statement packed with each product

PACKAGE

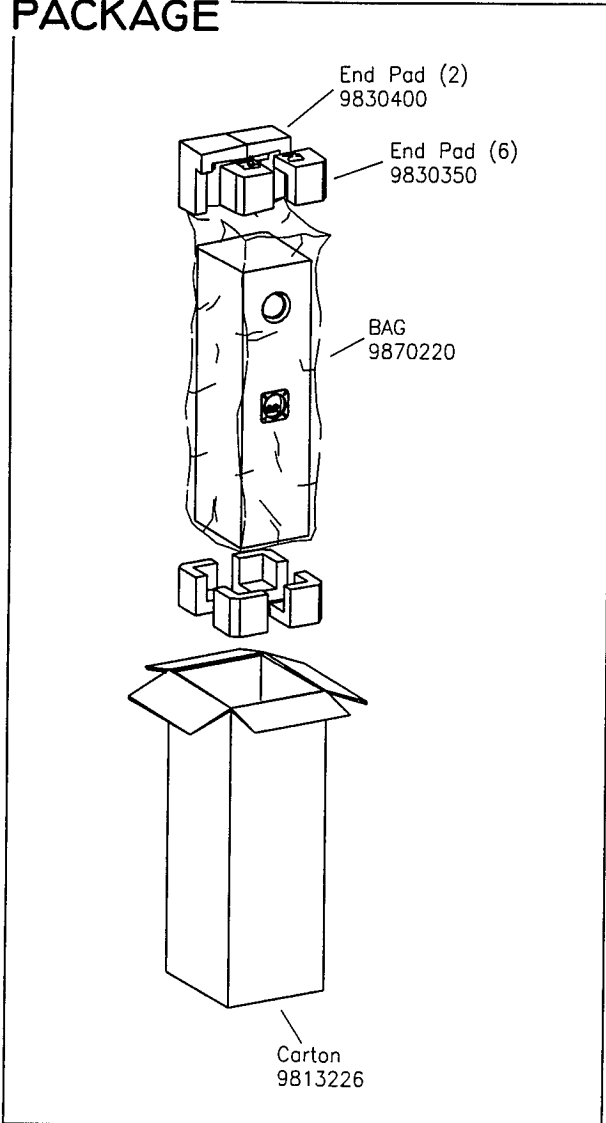

WIRING DIAGRAM

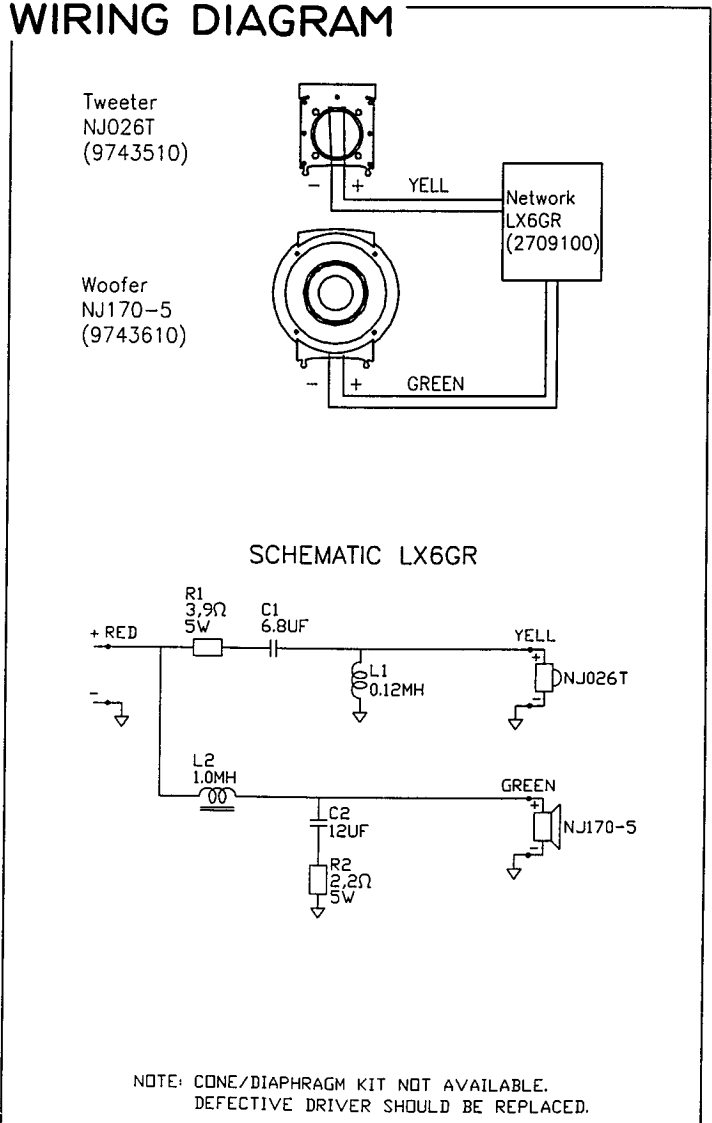


LX6GR

Valid from serial no. 01001
Rev. 13/11-1996

LX6GR

COMPONENT EXPLODED VIEW

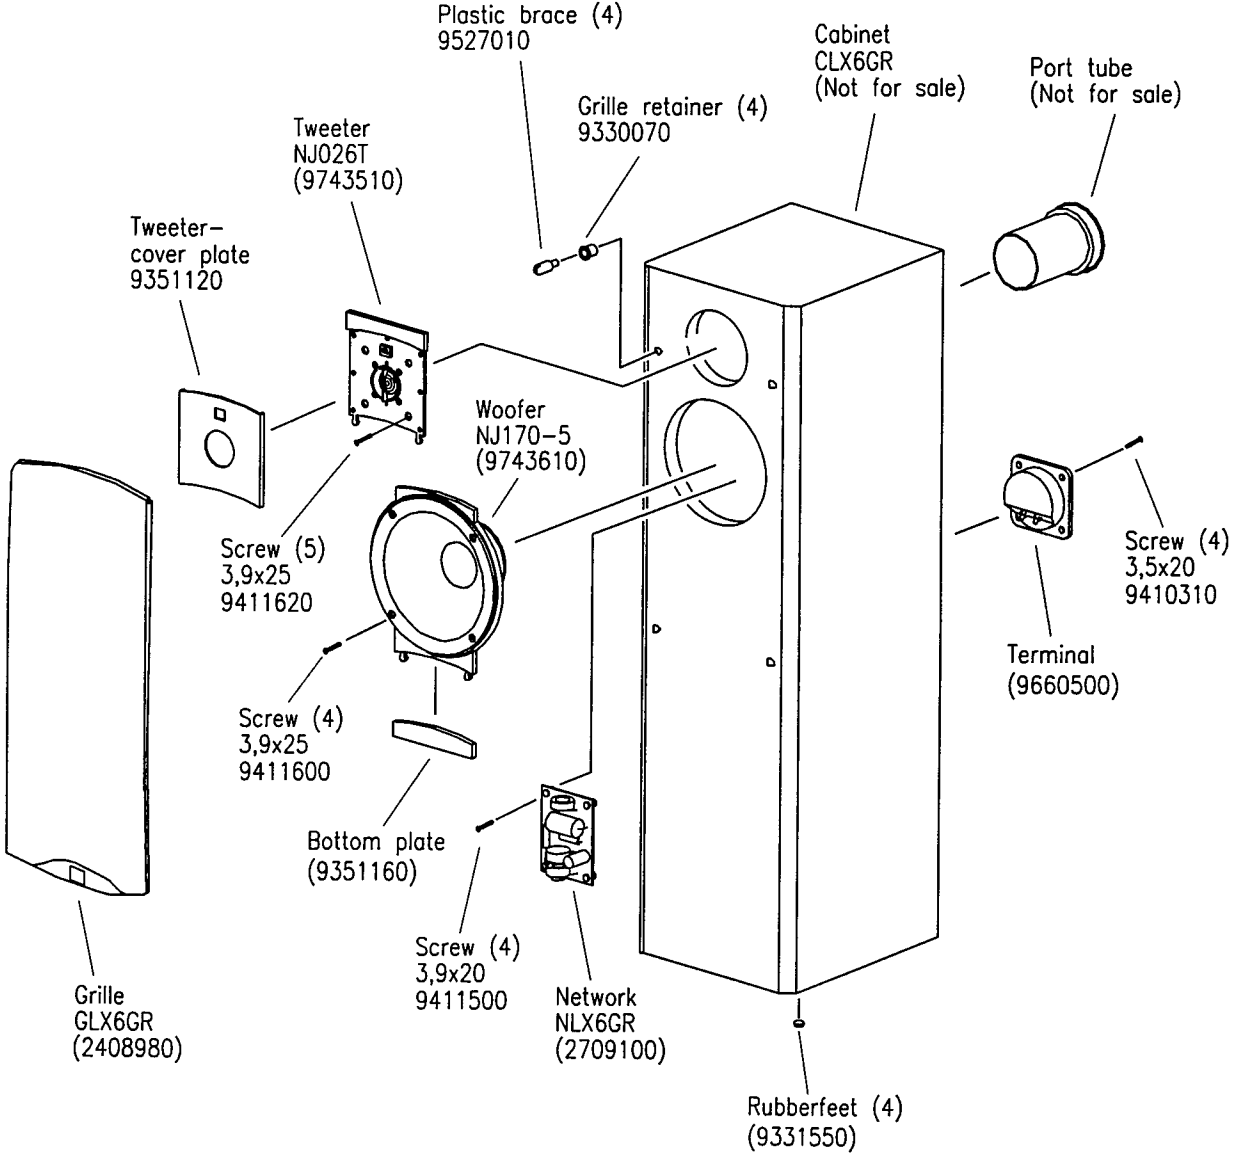

LX6GR