



LXE990

SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 8 ohm
- Recommended Amp Power: 10W to 200W
- Frequency Response: 40 Hz to 23 kHz (-6 dB)
- Sensitivity: 92 dB SPL*
- Crossover Frequency: 800 Hz and 3.2 kHz

SYSTEM COMPONENTS:

- Cabinet: CLXE990 (Not For Sale)
- Grille: GLXE990 (308778-001)
- Low Frequency Transducer: 410G-2 10 in. (254mm) High Polymer Laminate Cone Transducer (70443-02)
- DC Resistance: 5.0 ohm ±10% Copper Wire
- Mid Range Transducer: 405G-2 5 in. (127mm) High Polymer Laminate Cone Transducer (70575-02)
- DC Resistance: 5.0 ohm ±10% Copper Wire

*1 Watt @ 1 Meter

SYSTEM COMPONENTS: (cont'd)

- High Frequency Transducer: 027Ti 1 in. (25mm) Pure Titanium Dome Transducer (74528)
- DC Resistance: 4.0 ohm ±10% Copper Wire
- Crossover Network: NLXE990 (308833-001)

AURAL SWEEP TEST SPECIFICATIONS:

- A. System Aural Sweep Test: 6.0V Input, 20 Hz to 20 kHz
- B. L.F. Aural Sweep Test: 6.0V Input, 20 Hz to 1 kHz
- C. M.F. Aural Sweep Test: 6.0V Input, 700 Hz to 5 kHz
- D. H.F. Aural Sweep Test: 2.83V Input, 2 kHz to 20 kHz

PHYSICAL SPECIFICATIONS:


- Enclosure Dimensions: 28.5 x 13.5 x 8.93 in. D (724mm x 343mm x 227mm D)
- Shipping Weight: 37 lbs. (16.8 kg.)

WARRANTY INFORMATION:


- Refer to the Warranty Statement packed with each product.

PACKAGE

Warranty 73885
Owners Manual 308338-001

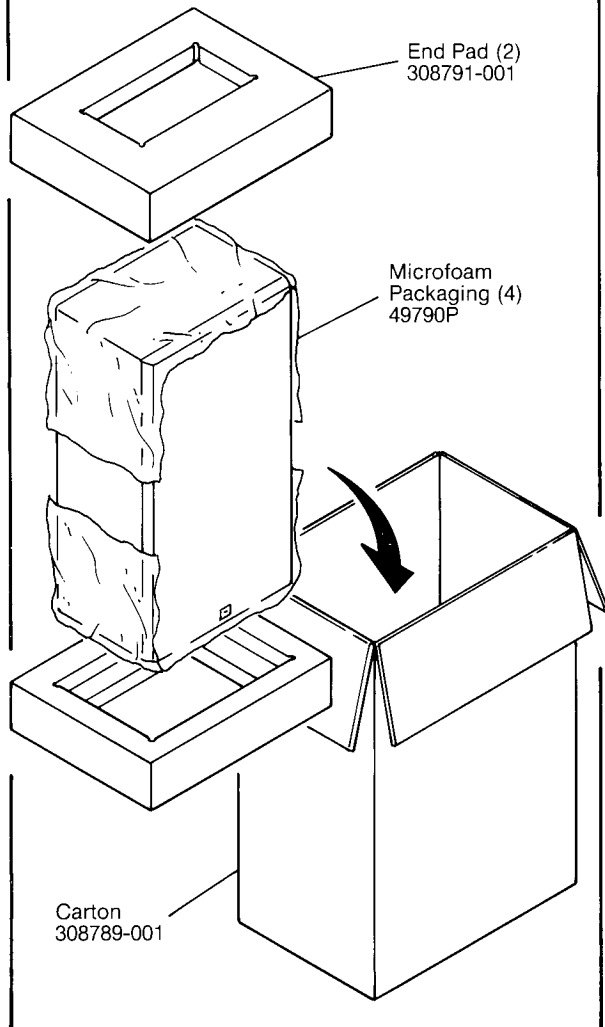

WIRING DIAGRAM

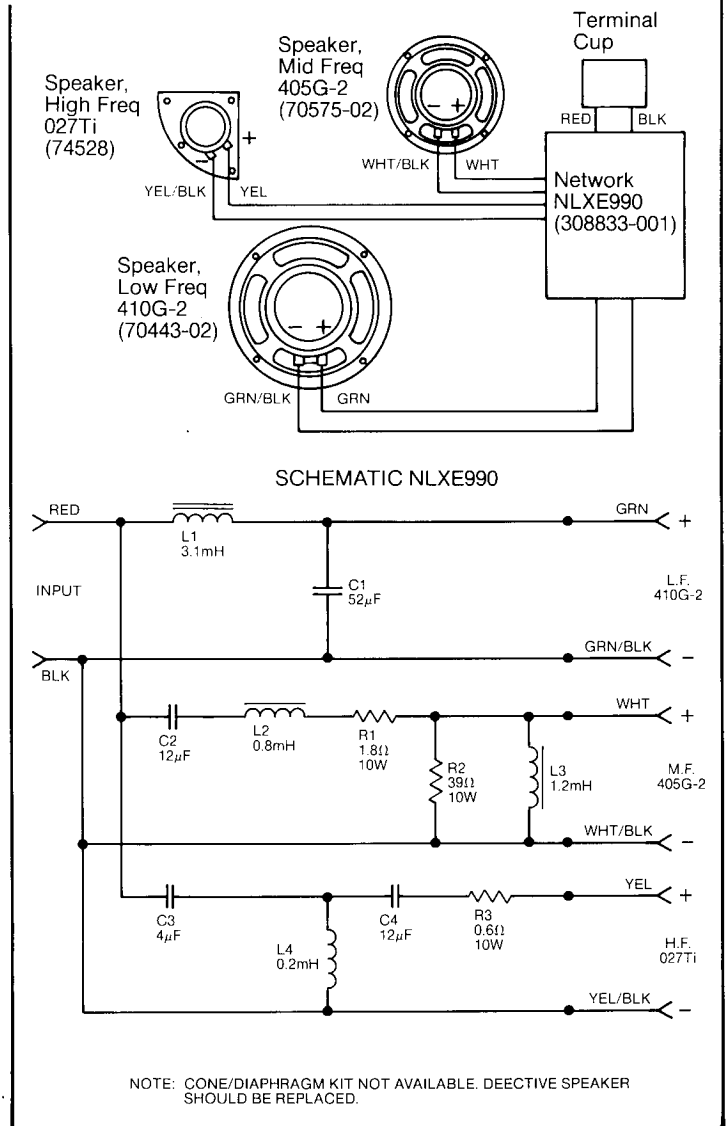

LXE990

LXE990

COMPONENT EXPLODED VIEW

