

JBL P50



SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 6 ohms
- Recommended Amplifier Power: 10 - 120 Watts
- Frequency Response: 42 - 20 KHz
- Sensitivity: 91 dB*
- Crossover Frequencies: 600 Hz / 3500 Hz

SYSTEM COMPONENTS:

- Cabinet: 210423 Walnut
- Grille: GP50
- Low Frequency Transducer: 203 mm (8 Inch)(208 H) High Polymer Laminate
- Midrange Frequency Transducer: 130 mm (6,5 Inch)(205 H) High Polymer Laminate

*1 Watt (2,83 V RMS) @ 1 Meter

SYSTEM COMPONENTS: (cont'd)

- High Frequency Transducer: 26 mm (1 Inch)(TW025XE) Titanium Laminate
- Crossover Network: NP50


PHYSICAL SPECIFICATIONS:

- Enclosure Dimensions: 37 7/8 x 10 5/8 x 12 3/4 (D) Inch
960 x 270 x 323 (D) mm
- Weight: 36.5 lbs
16.5 Kg


WARRANTY INFORMATION:

- Refer to the Warranty Statement packed with each product.

PACKAGE

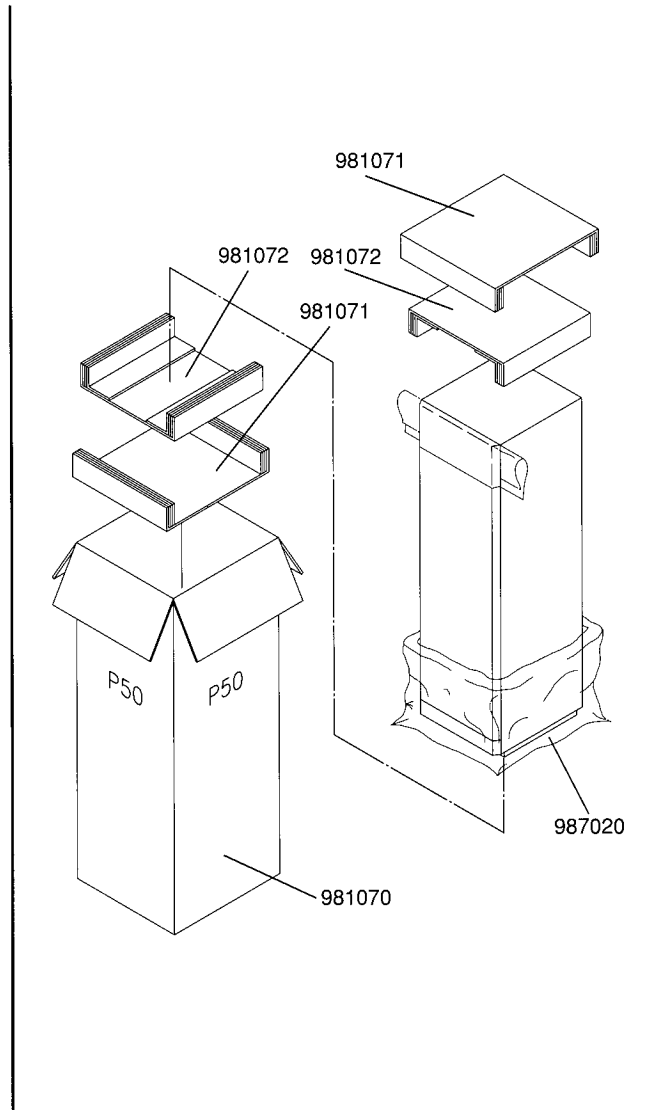

WIRING DIAGRAM

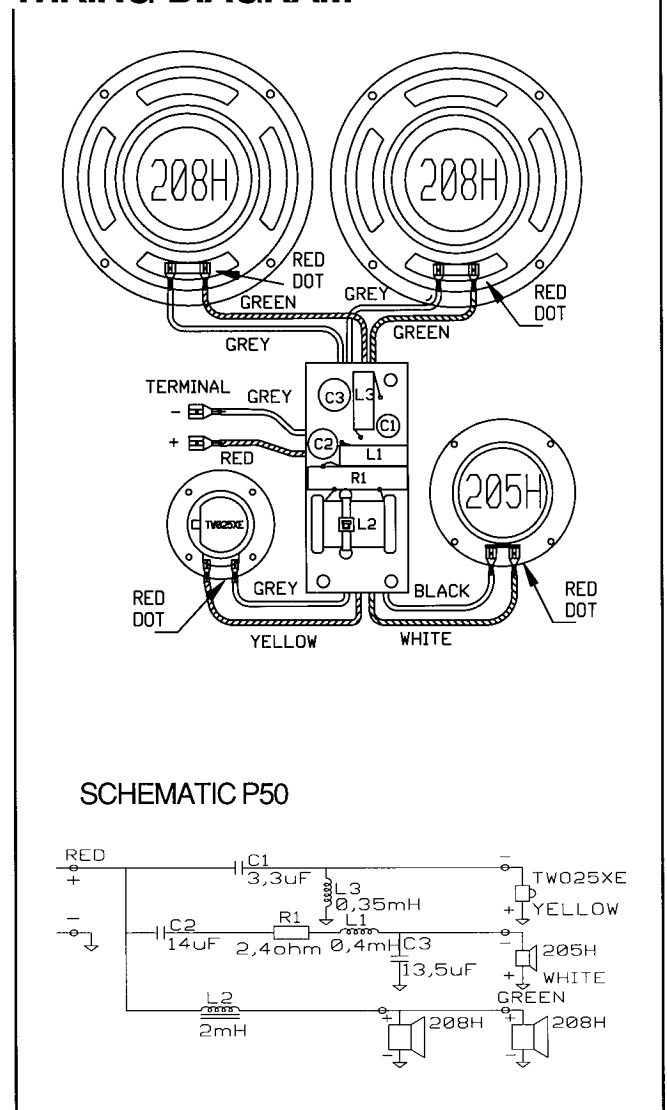

DRIVER	TEST VOLTAGE	SWEEP FREQUENCY	DCR MIN-MAX.
TWO25XE	2.83	2KHZ-20KHZ	5.8-6.8 OHMS
205H	3	100HZ-1.2KHZKHZ	3.6-4.0 OHMS
208H	4	20HZ-1.2KHZ	6.2-6.9 OHMS

JBL P50

COMPONENT EXPLODED VIEW

