
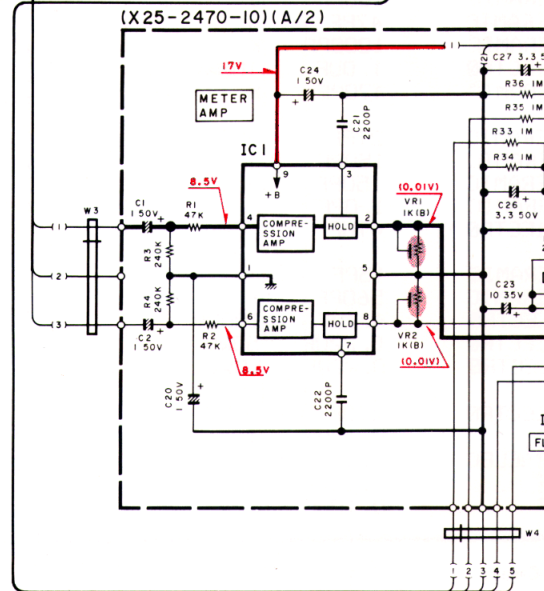
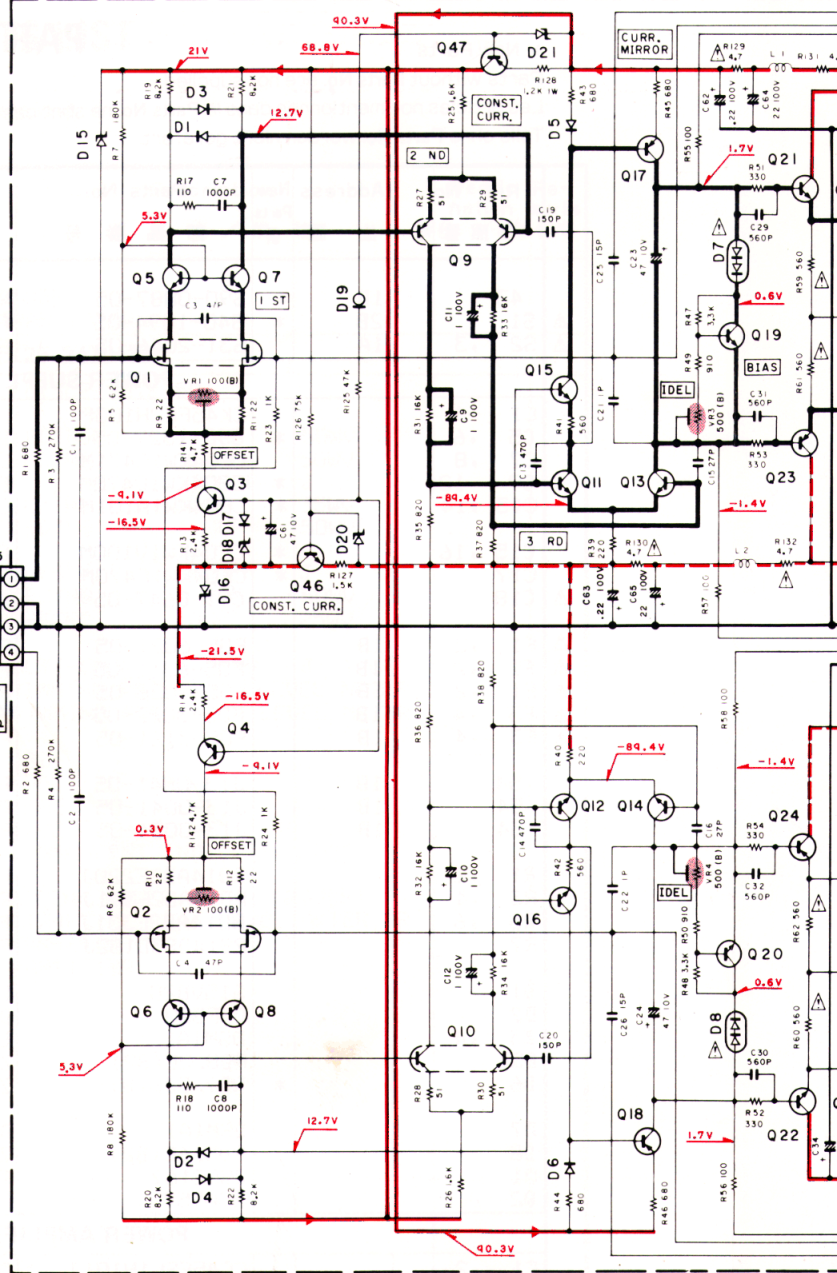



- | | | | |
|--------------------------|--------------------|------------------|----------------|
| Q1, 2 | : μ PA68H(K,L) | D1 ~ 6, 17 | : IS2076 |
| Q3 ~ 8 | : 2SC1845 | D7, 8 | : STV-2H |
| Q9, 10 | : 2SA1349 | D9 ~ 12, 29 ~ 32 | : RU4Z |
| Q11 ~ 14, 21, 22, 43, 44 | : 2SC2682(I)(Q,P) | D13, 14, 22, 23 | : IS2076A |
| Q15, 16 | : 2SC26321(Q,R) | D15, 16, 21 | : RD22JS(B) |
| Q17, 18, 23, 24 | : 2SA1142(I)(Q,P) | D18 | : RD5.1JS(B) |
| Q19, 20 | : 2SC1841 | D19 | : E-102 |
| Q25, 26 | : 2SC2336B(Q,P) | D20 | : RD15JS(B) |
| Q27, 28 | : 2SA1006B(Q,P) | IC1, 2 | : TA2031 |
| Q29, 30 | : DAT1521P*5 | IC3 | : μ CI237H |
| Q31, 32 | : DAT1521P*5 | | |
| Q33, 34 | : DAT1018N*5 | | |
| Q35, 36 | : DAT1018P*5 | | |
| Q37, 38 | : 2SC2320(E,F) | | |
| Q39 ~ 42 | : 2SA999(E,F) | | |
| Q45 | : 2SA988 | | |
| Q46 | : 2SC2590 | | |
| Q47 | : 2SA957 | | |

POWER AMP (X07-2250-10)

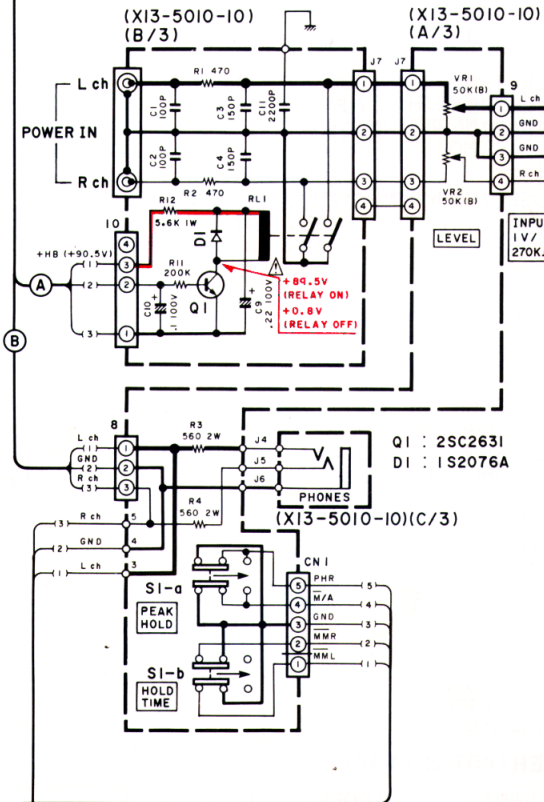

- | | |
|--------|--------------------|
| D1 | : ISS133 or ISS176 |
| D2 | : ISS131 or ISS178 |
| D3 ~ 5 | : B30-0492-05 |

- | | |
|---------------|------------------|
| Q1, 2, 10, 11 | : 2SC945(A)(Q,P) |
| IC1 | : TA7318P |
| IC2 | : LC7550 |

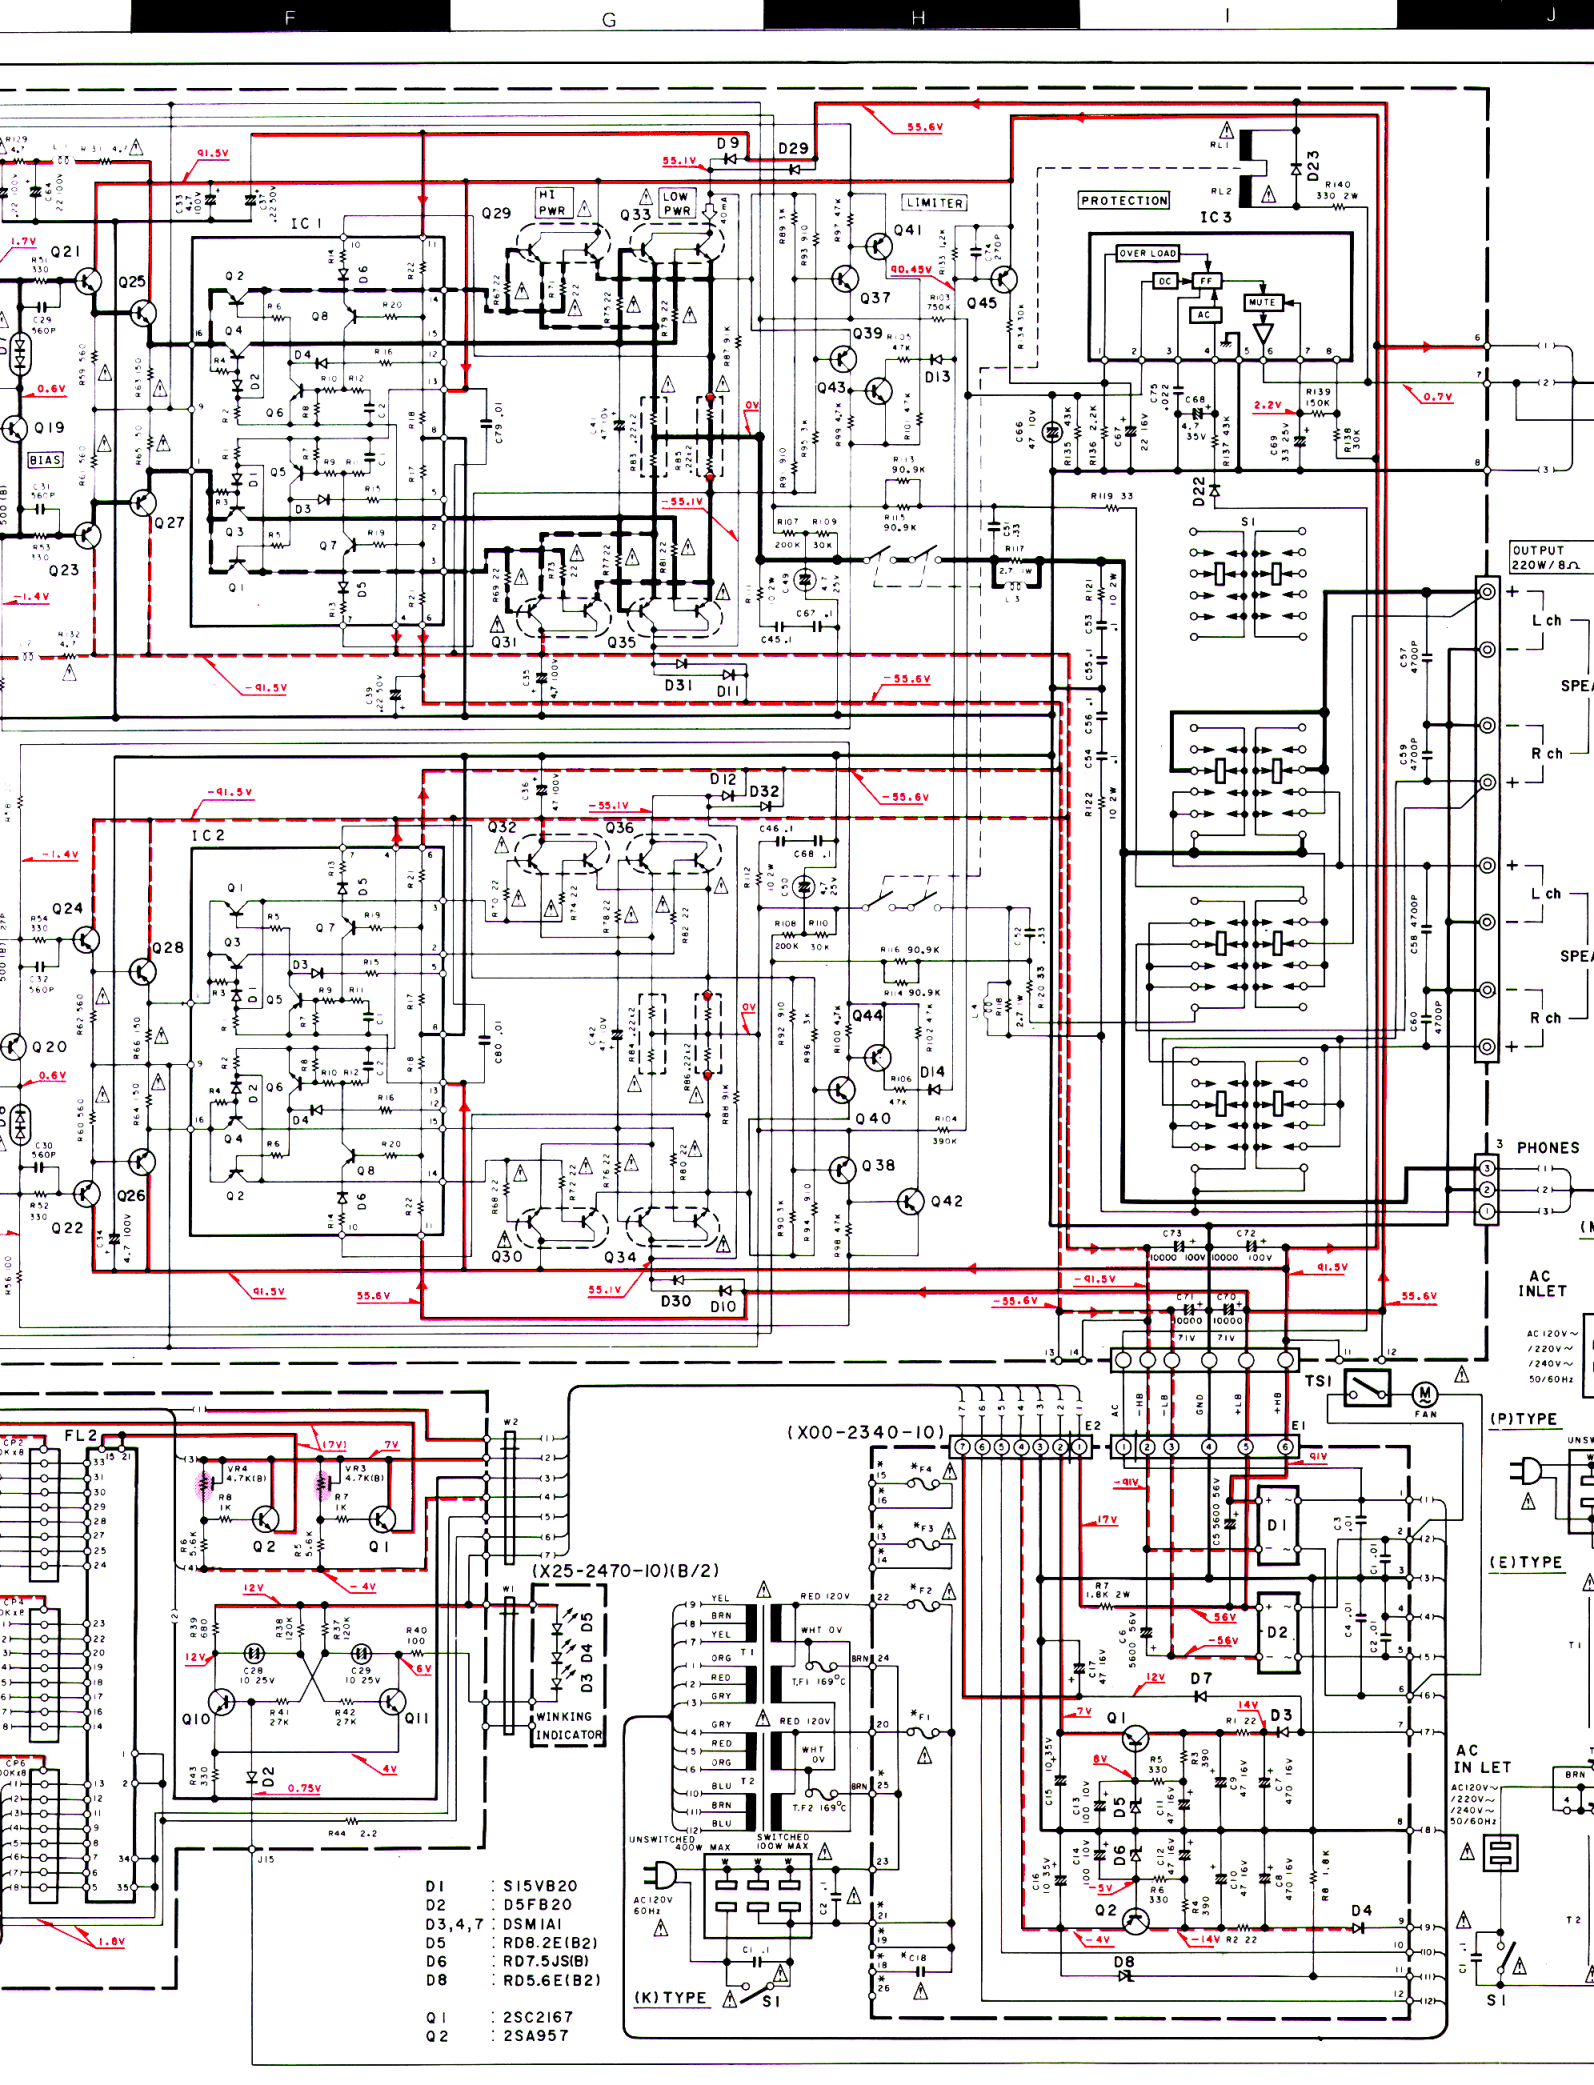

- D1 : S15VB20
- D2 : D5FB20
- D3,4,7 : DSMIAI
- D5 : RD8.2E(B2)
- D6 : RD7.5JS(B)
- D8 : RD5.6E(B2)

- Q1 : 2SC2167
- Q2 : 2SA957

OUTPUT 220W/8Ω

L ch

R ch

SPEAKER

L ch

R ch

SPEAKER

PHONES

AC INLET

AC 120V ~

220V ~

240V ~

50/60Hz

(P)TYPE

UNSW

(E)TYPE

AC IN LET


AC 120V ~

220V ~

240V ~

50/60Hz


(K) TYPE

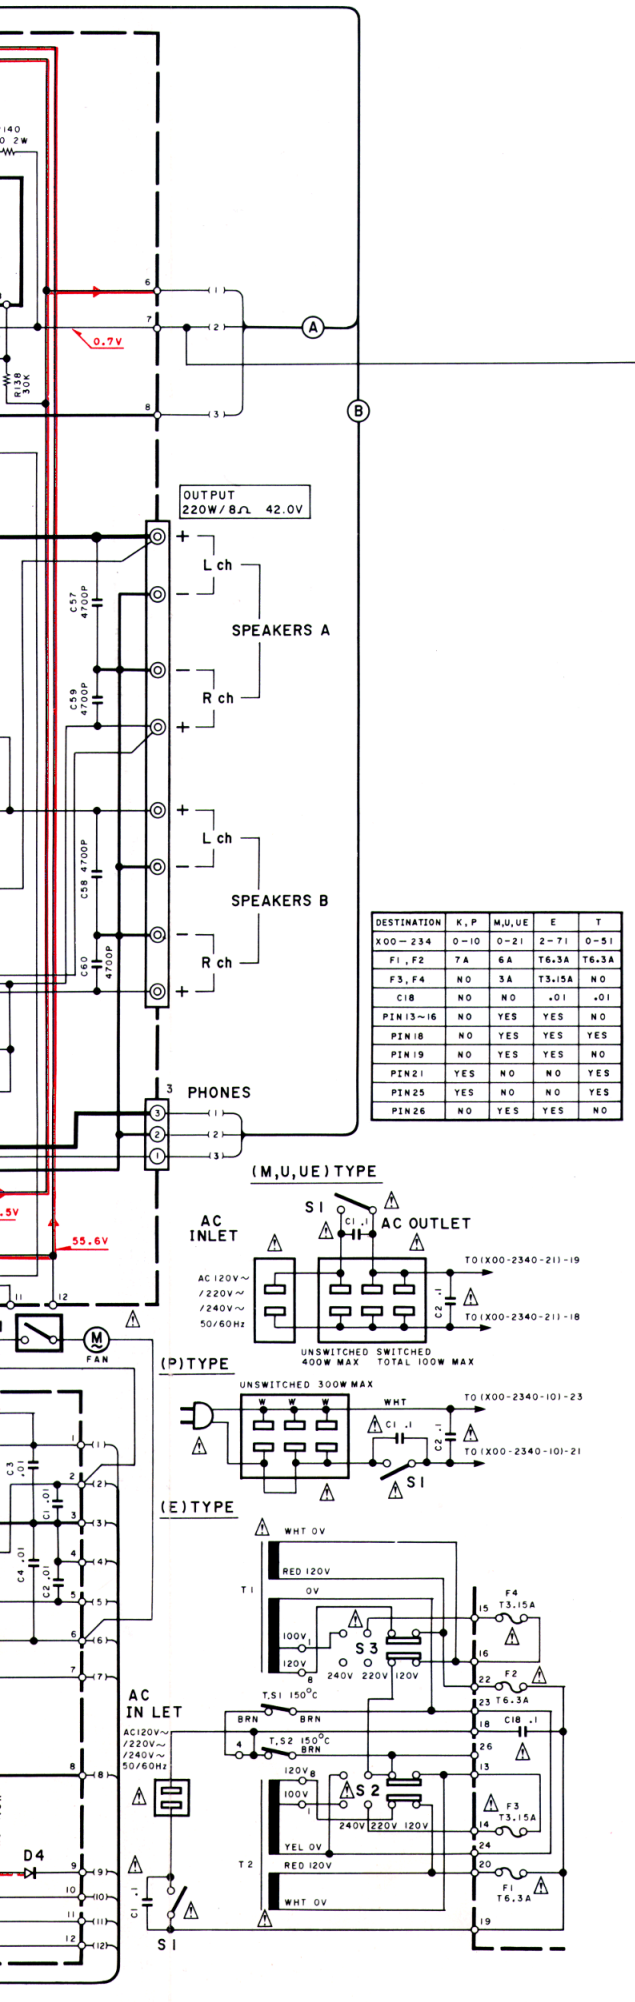


DESTINATION	K, P	M, U, UE	E	T
X00-234	0-10	0-21	2-71	0-51
F1, F2	7A	6A	T6.3A	T6.3A
F3, F4	NO	3A	T3.15A	NO
C18	NO	NO	.01	.01
PIN13-16	NO	YES	YES	NO
PIN18	NO	YES	YES	YES
PIN19	NO	YES	YES	NO
PIN21	YES	NO	NO	YES
PIN25	YES	NO	NO	YES
PIN26	NO	YES	YES	NO

2SA988
2SA999
2SC1841
2SC1845


2SC2320
2SC2631
2SC2632
2SC945(A)




2SA1142
2SC2590
2SC2682




2SA1006B
2SA957
2SC2167
2SC2336B




2SA1349




μPA68H




TA7318P




μPC1237H




DAT1018N*5
DAT1018P*5
DAT1521N*5
DAT1521P*5



TA2031



LC7550



- DC voltages are as measured with a high impedance voltmeter with no signal input. Values may vary slightly due to variations between individual instruments or/and units.
- Les tensions c.c. doivent être mesurées avec un voltmètre à haute impédance sans signal d'entrée. Les valeurs peuvent différer légèrement du fait des variations inhérentes aux appareils et aux instruments de mesure individuels.
- Die angegebenen Gleichspannungswerte wurden mit einem hochohmigen Voltmeter ohne Eingangssignal gemessen. Dabei schwanken die Meßwerte aufgrund von Unterschieden zwischen einzelnen Instrumenten oder Geräten u.U. geringfügig.

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). ⚠ Indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

BASIC M2A

KENWOOD