

S

Handwritten notes:
1715
1960
16

ARNOLD SILECTRON CORES



BULLETIN SC-107A
REPRINTED AUGUST, 1966





ARNOLD SILECTRON CORES

INDEX

	Page		Page
General technical information	3- 4	Permeability curves for 2, 4 and 12 mil "C" cores	34
Technical information on 1 and 2 mil "C" cores	5	Technical information on 3 phase "E" cores and tabulation of 12 mil sizes	35
Standard sizes of 1 mil "C" cores, type "AM"	6- 7	Tabulation of 4 mil three phase core sizes	36
Standard sizes of 2 mil "C" cores, type "AL"	8, 9, 10	Technical information on uncut cores	37
Typical curves for 1 mil "C" cores	11, 12, 13	Standard sizes of uncut cores	38-39
Typical curves for 2 mil "C" cores	14, 15, 16	Typical dc hysteresis loops for 1 mil uncut cores	40-41
Technical information on 4 mil "C" cores	17	Typical dc hysteresis loops for 2 mil uncut cores	42-43
Standard sizes of 4 mil "C" cores, type "AH"	18, 19, 20, 21, 22	Typical dc hysteresis loops for 4 mil uncut cores	44-45
Standard sizes of 4 mil "C" cores, type "AZ"	23	Typical dc hysteresis loops for 4 mil, type "Z" uncut cores	46
Design curves for 4 mil "C" cores, type "AH"	24-25	Typical dc hysteresis loops for 12 mil uncut cores	47-48
Design curves for 4 mil "C" cores, type "AZ"	26	Typical dc normal magnetization curves for 1, 2, 4 and 12 mil Silectron	49
Technical information on 12 mil "C" cores	27	Effective permeability curves for cut cores	50
Standard sizes of 12 mil "C" cores, type "AA"	28, 31	Banding Data	51
Design curves for 12 mil "C" cores	32-33		

THE ARNOLD ENGINEERING COMPANY

SUBSIDIARY OF ALLEGHENY LUDLUM STEEL CORPORATION



MAIN OFFICES AND PLANT: Marengo, Illinois, Area Code 815, 568-7251, Zip Code 60152

PACIFIC DIVISION PLANT: Fullerton, California, Area Code 714, TR 1-1560, Zip Code 92631

DISTRICT REPRESENTATION

BOSTON, MASS.: The Arnold Engineering Company, Box 309, Lexington, Mass., Area Code 617, VOLunteer 2-2804, Zip Code 01054

CHICAGO, ILL.: The Arnold Engineering Company, Area Code 312, ANdover 3-6300,

CLEVELAND, OHIO: The Arnold Engineering Company, 8905 Lake Avenue, Area Code 216, OLYmpic 1-1242, Zip Code 44100

DALLAS, TEXAS: Southwest Electronic Industries, Inc., 183 Meadows Bldg., Area Code 214, EMerson 3-1671, Zip Code 75206

HOUSTON, TEXAS: Southwest Electronic Industries, Inc., 6001 Gulf Freeway, Area Code 713, WA 8-5251, Zip Code 77000

HUNTINGTON, INDIANA: The Arnold Engineering Company, U.B. Building, Room 306, Area Code 219, 356-5224, Zip Code 46750

JACKSON, MICHIGAN: The Arnold Engineering Company, 1304 W. Michigan Avenue, Area Code 517, STate 4-5663, Zip Code 49201

LOS ANGELES, CALIF.: The Arnold Engineering Company, 1551 E. Orangethorpe, Fullerton, California, Area Code 714, TRoan 1-1560, Zip Code 92631

MILWAUKEE, WISCONSIN: The Arnold Engineering Company, 4604 N. Wilson Drive, Area Code 414, WOODruff 2-2942, Zip Code 53211

MINNEAPOLIS, MINN.: The Arnold Engineering Company, 6524 Walker Street, Area Code 612, WEst 9-5161, Zip Code 55416

NEW YORK, N. Y. (Metropolitan Area): The Arnold Engineering Company, 610 E. Palisade Ave., Englewood Cliffs, N. J., Area Code 201, LOwell 7-4640, Zip Code 07631

NEW YORK (Western): Brace-Mueller-Huntley, Inc., 2000 Military Road, Buffalo, N. Y., Area Code 716, TR 7-8700, Zip Code 14217

Brace-Mueller-Huntley, Inc. P.O. Box 104, 315 Hollenbeck St., Rochester, N. Y., Area Code 716, CONgress 6-6560, Zip Code 14621

PHILADELPHIA, PA.: The Arnold Engineering Company, 610 E. Palisade Ave., Englewood Cliffs, N. J., ENterprise 6374, Zip Code 07631

RALEIGH, N. C.: The Arnold Engineering Company, 204 N. Person St., Area Code 919, 828-3270, Zip Code 27600

SAN FRANCISCO, CALIF.: The Arnold Engineering Company, 701 Welch Road, Palo Alto, Calif., Area Code 415, DAvenport 6-9302, Zip Code 94300

WASHINGTON, D. C.: The Arnold Engineering Company, 1601 Fifteenth St., N.W., Area Code 202, 393-0074, Zip Code 20005

CANADA

DUNDAS, ONTARIO: El-Met-Parts, Ltd., 55 Head Street, (Dundas Exchange) Area Code 416, 628-6366

EXPORT

(U.K. & WESTERN EUROPE): The Arnold Engineering Co., Marengo, Illinois, Area Code 815, 568-7251, Zip Code 60152

(OTHER AREAS): Sylvan Ginsbury, Ltd., 72 West 45th Street, New York 18, N. Y., Area Code 212, 687-3213, Zip Code 10036

DC I max. • 2.50/cell • 1.0 → VA MAX

600 cir mils/A

SILECTRON CORES

PROCESSING

Silectron Cores are manufactured from the highly grain-oriented silicon steel — Silectron. This is a cold-rolled grade of 3% Silicon Steel, manufactured by the Allegheny Ludlum Steel Corporation. It has high saturation flux density and lower core losses and exciting volt-amperes than were previously available from regular silicon steel. The high degree of orientation obtained in Silectron is preserved in both the cut core and gapless construction. This permits operation of the core material at higher inductions, and results in components of lighter weight and smaller size.

The Silectron strip is treated on both sides with a C-10 finish. This finish is an improved chemical and thermal treatment, applied only to Silectron, to provide exceptionally good interlamination resistance with a negligible effect on space factor. The coated strip is slit to the proper width and wound on a mandrel to make a gapless core. The core is then annealed to relieve winding stresses. Gapless cores may be supplied as annealed, or further processed by impregnating with varnish to provide greater rigidity or ease in handling.

Impregnation bonds the core together. In the production of "C" and "E" cores, the annealed and impregnated core is cut so as to produce two core halves. Careful processing of the core and its cut surfaces results in accurately dimensioned core halves whose effective air gap at the butt joint is very small. The total effective air gap length "a" (Formula 4, page 4) will be only .001" maximum for cores with a gross area of $2\frac{1}{4}$ square inches or less and a build up of 1" or less. For larger cores a total effective air gap of .002" maximum is maintained. Lapped cores may be furnished for applications where the air gap must be reduced to a minimum. The maximum effective air gap of a lapped core is one-half that of the regular guarantee.

Silectron cores are made from strip in standard thickness of 1, 2, 4 and 12 mils. A considerable selection of core sizes is available in each of these thicknesses, as shown in this bulletin. The preferred or stock core sizes, as denoted by asterisks in the tabulations, are recommended for use wherever possible. Cores in non-standard sizes and thicknesses may also be made on special order.

Impregnated Silectron cores are guaranteed for operation at temperatures as high as 300° F under proper conditions of core and coil assembly. In many instances higher operating temperatures may be maintained.

MATERIAL THICKNESS IDENTIFICATION

Identification of each cut core is accomplished

by stamping the part number on one side of the core. The part number is located in such a way that the core halves can be readily paired in the same relative position as when cut. For ease in maintaining this relative position during transformer assembly, an identifying mark is also placed on the top side of the core at each end. Each cut core is packaged individually by tying with a loop of colored string and plastic dipping. To indicate tape thickness in mils, the string color follows the EIA color code. The written prefix of the part number is also a code to the thickness of the strip.

MATERIAL THICKNESS	PART NUMBER PREFIX	STRING COLOR
1 mil	AM	Brown
2 mil	AL	Red
4 mil	AH	Yellow
4 mil	AZ	Yellow - Black
12 mil	AA	Brown - Red

PART NUMBER DESIGNATION

The part numbers used for Silectron cut cores are the same as the part numbers established by the Westinghouse Electric Corporation for this type of core, with certain exceptions. All Silectron cut cores are prefixed with the letter "A," indicating manufactured by The Arnold Engineering Company. The second letter of the prefix usually indicates the thickness of the core material, as tabulated above. Thus, a Westinghouse H-1 becomes an Arnold Engineering AH-1. Core numbers which have four digits are cores which are indigenous to The Arnold Engineering Company, or for which there are no known equivalent Westinghouse parts.

Three phase cores are numbered on the same basis, except the letter "T" is used in the prefix. Thus, a typical Arnold Engineering three phase part number would be ATH-1199. An equivalent to the Westinghouse part TH-45 would be ATH-45.

Uncut core part numbers have four or five digits, preceded by the letter "T" to indicate a tape core and followed by the letter "L" to signify Silectron, and a number to indicate the tape thickness in mils. Thus, a typical part number of an uncut, unimpregnated, cased core of four mil Silectron would be T4180-L4. The letter "V" may follow this part number to indicate that the core is impregnated. A more detailed explanation of this nomenclature is found on page 37.



EI 250 = 883 VA / inch Build

POWER HANDLING CAPACITY

It should be noted that the cut core tabulations in this bulletin are in order of increasing power handling capacity as denoted by the product of core cross-section and window area (D x E x F x G). In the case of 12 mil cores, this product times 100 is an approximation to the maximum power in watts that a pair of cores can handle under normal conditions at 60 cps and 15 KB. For cores of other tape thicknesses, and for operation at other frequencies and inductions, this proportionality constant will be different. This system of cataloging cores was suggested by Mr. Herbert French of Newton Engineering Service.

Tabulations of cut core sizes in the past have been made on the basis of their increasing order of core weight, window width, core area or by part number sequence. It is believed that the system described above will assist the transformer designer in his selection of a standard core size which will most closely fit his application. It should help to eliminate from common usage those cores which have a high ratio of weight to power handling capacity.

DESIGN FORMULAE

The testing and design of transformers and reactors utilizing Silectron cores may be based upon the following formulae, which include the calculation of core weight, volts per turn, core loss, exciting current and inductance.

In all of these calculations, the following stacking factors should be used:

12 mil.....	0.95
4 mil.....	0.90
2 mil.....	0.89
1 mil.....	0.83

Nominal core weight (Wt.) may be calculated by the equation:

Wt. = .276 S x D x E (2F + 2G + 2.9E) (1)

- Where: Wt. = nominal core weight in pounds.
- .276 = density of Silectron in pounds per cubic inch.
- S = stacking factor.
- D = strip width in inches.
- E = build-up in inches.
- F = window width in inches.
- G = window length in inches.

The number of volts per turn (V/N) corresponding to a given value of induction and frequency may be calculated by the equation:

V/N = 2.865 B x f x A x S x 10^-4 (2)

V/N = 0.245 A

V/N = 0.196 A

N/V = 4.3/A

FOR E-LA

CDL charges

- Where: V = rms volts.
- N = number of turns.
- B = induction in kilogausses.
- f = frequency in cycles per second.
- A = gross core area in square inches (D x E).
- S = stacking factor.

The maximum core loss, P_c in watts may be calculated by the equation:

P_c = Wt. x W/lb. (3)

- Where: P_c = core loss in watts.
- Wt. = nominal core weight in pounds.
- W/lb. = max. design curve value of watts per pound corresponding to the desired frequency and induction. Refer to Figures 7, 9, 10.

The maximum exciting current (I) may be calculated by the equation:

I = (Wt. x VA/lb. / V) + (1.43 x B x a x S x 10^3 / N) (4)

- Where: I = rms exciting current in amperes.
- Wt. = core weight in pounds.
- V = rms volts corresponding to B and N.
- B = induction in kilogausses.
- N = number of turns.
- a = effective air gap length in inches.
 - a = .001" when D x E <= 2-1/4 in^2 or E <= 1"
 - a = .002" when D x E > 2-1/4 in^2 or E > 1"
- S = stacking factor.
- VA/lb. = maximum design value of apparent watts per pound corresponding to the desired frequency and induction. Refer to Figures 8, 9, 11.

The exciting current, as calculated by the equation above, is made up of two factors. The first term of the equation gives the exciting current requirement of the core material. The second term gives the exciting current required by the gap. For gapless cores the second term is, of course, omitted.

The inductance of a reactor or choke may be calculated by the equation:

L = (3.2 x N^2 x A x 10^-8) / (a + l / mu_d)

- Where: L = inductance in henries.
- N = number of turns.
- A = gross core area in square inches (D x E).
- a = effective air gap length in inches.
- l = core length in inches (2F + 2G + 2.9E).
- mu_d = incremental permeability under conditions of ac or dc magnetization present in the core.

$$0.18 \cdot A = \frac{V}{N} = E \text{ Type form.}$$

1 AND 2 MIL "C" CORES

The 1 and 2 mil Silectron "C" cores are used primarily in pulse transformers. However, they also find considerable use in high frequency transformer applications, and in devices such as charging chokes having high frequency components of exciting current.

The use of 1 and 2 mil thicknesses is an advantage only at comparatively high frequencies, since their core loss and excitation characteristics at low frequencies are somewhat poorer than those of the 4 and 12 mil thicknesses. This can be seen by a comparison of the curves on Figures 2, 3, 5 and 6 with those of Figures 7, 8, 10 and 11. As indicated by the dc data on the oriented silicon steels (Figures 13 — 21), the thinner material has higher coercive force than the thicker material. The advantage in using the 1 mil and 2 mil thicknesses results primarily from their lower eddy current losses at high frequencies.

The 1 and 2 mil Silectron "C" cores are normally tested only for pulse permeability since most of the applications are for pulse transformers. The 1 mil type "AM" cores are measured at 0.25 microsecond, 2.5 kilogausses and 1000 pulses per second. Under these conditions, the minimum pulse permeability is 300 for the normal range of core sizes. However, 1 mil cores which are unusually small or large, or made from tape widths exceeding 1", may have lower pulse permeability. The 2 mil type "AL" cores are measured at 2 microseconds, 10 kilogausses, 400 pulses per second. Under these conditions, the minimum pulse permeability is 600 for the normal range of core sizes. Two mil cores which are unusually small or large, or made from tape widths greater than 2", may have lower pulse permeability.

It should be pointed out that optimum pulse permeability for larger cores may be realized only by shimming the gap between the core halves with insulating shims. This usually applies only to cores weighing more than 2 or 3 pounds, in which case the ratio of length of iron to length of air path is exceptionally large. This results in a high value of residual induction. The introduction of an air gap reduces the residual induction of the cut core and results in a larger change in incremental induction, ΔB , for the same applied peak pulse magnetizing force, H_m . In cases where a resetting or biasing magnetomotive force is available, it may not be necessary to introduce a gap between the core halves to obtain optimum pulse permeability. By applying a resetting mmf to the core it is possible to use a gapless core in pulse transformers and realize high values of effective pulse permeability.

Pulse testing of 1 and 2 mil cut cores is performed on a 100% basis. To accommodate the wide range of core sizes manufactured, test equipment is used which covers a range of pulse lengths from .05 to 10 microseconds with pulse power as high as 10 megawatts, at repetition rates up to 1000 pulses per second.

In order to determine the volts per turn required for the pulse testing of cores or design of pulse transformers, the following equation is used:

$$\frac{V}{N} = \frac{6.45 A \times S \times \Delta B}{t \times 10^8} \quad (6)$$

Where: V = peak voltage at end of pulse in volts.
 N = number of turns.
 A = gross core area in square inches (D×E).
 S = stacking factor.
 t = pulse length in seconds.
 ΔB = induction change in gausses.

The pulse permeability is calculated as:

$$\mu_e = \frac{\Delta B \times l \times 2.54}{.4 \pi N I_m} \quad (7)$$

Where: μ_e = effective pulse permeability at end of pulse.
 I_m = peak exciting current in amperes.
 l = core length in inches (2F+2G+2.9E).

High frequency applications for 1 and 2 mil "C" cores require testing for core loss and exciting current under operating conditions. The standard pulse test given these cores may not be indicative of their core loss or excitation characteristics at other frequencies. Figures 2, 3, 5 and 6 represent typical values of these properties over a frequency range from 60 cps to 100 kc. Guaranteed values under specific operating conditions may be established only after consultation with The Arnold Engineering Company. Core loss and exciting current may be tested up to 20 kc or higher. Equipment for supplying 10 kilowatts up to 10 kc or 5 kilowatts up to 20 kc is available for this purpose. Equipment is also available for supplying 200 watts up to 100 kc for test work.



The 3 mil non-oriented silicon steel which was used in the older pulse transformer designs has now been largely replaced with the newer 2 mil and 4 mil oriented grades. Although not recommended, 3 mil cores will be made to special order.



ARNOLD SILECTRON CORES

For Dimensional Tolerances, See Latest Supplement.

For ready identification, these cores are stamped with the type designation "AM", then tied with BROWN string before plastic dipping.

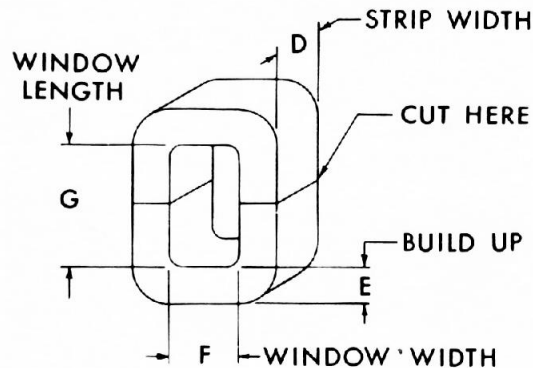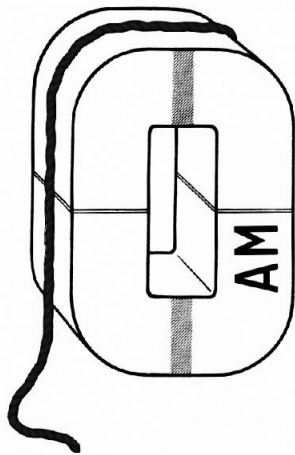

AECo. Part Number	Nominal Weight (lb.)	NOMINAL CORE DIMENSIONS				Gross Area (D×E)-in. ²	Window Area (F×G)-in. ²	Relative Power Handling Capacity (D×E×F×G×100)-in. ⁴
		D	E	F	G			
AM-1451	.002	1/8	1/16	1/8	3/8	.008	.047	.037
AM-1452	.005	1/8	1/8	1/8	3/8	.016	.047	.075
AM-1453	.006	1/8	1/8	3/16	3/8	.016	.070	.110
AM-1454	.009	1/4	1/8	5/32	3/8	.031	.059	.180
AM-1455	.010	1/4	1/8	3/16	3/8	.031	.070	.220
*AM-3	.013	1/4	1/8	1/4	1/2	.031	.125	.390
AM-1	.025	1/4	3/16	1/4	5/8	.047	.156	.730
AM-21	.032	1/4	1/4	1/4	1/2	.062	.125	.780
AM-10	.036	1/4	1/4	1/4	5/8	.062	.156	.970
AM-6	.036	3/8	3/16	1/4	5/8	.070	.156	1.09
*AM-2	.044	1/4	1/4	1/4	7/8	.062	.219	1.36
AM-4	.065	3/8	1/4	1/4	7/8	.094	.219	2.06
AM-8	.061	3/8	7/32	5/16	1	.082	.313	2.57
*AM-7	.085	1/2	1/4	1/4	7/8	.125	.219	2.74
AM-34	.093	3/8	1/4	1/2	1-5/16	.094	.656	6.17
AM-5	.135	3/8	3/8	3/8	1-3/16	.141	.445	6.27
AM-30	.135	3/8	3/8	7/16	1-1/8	.141	.492	6.94
AM-37	.145	3/8	3/8	1/2	1-1/8	.141	.563	7.94
AM-15	.187	1/2	3/8	3/8	1-3/16	.188	.445	8.37
AM-11	.143	5/8	1/4	1/2	1-1/8	.156	.563	8.78
AM-33	.104	3/8	1/4	7/8	1-1/4	.094	1.09	10.3
AM-42	.227	5/8	3/8	3/8	1-3/16	.234	.445	10.4
AM-24	.227	1/2	7/16	1/2	1-1/8	.219	.563	12.3
AM-16	.270	3/4	3/8	3/8	1-3/16	.281	.445	12.5
AM-36	.232	1/2	7/16	9/16	1-1/8	.219	.633	13.9
AM-55	.271	1/2	7/16	1/2	1-9/16	.219	.781	17.1
AM-53	.240	1/2	3/8	5/8	1-5/8	.188	1.02	19.2
AM-12	.322	1/2	1/2	1/2	1-9/16	.250	.781	19.5
AM-49	.358	3/4	7/16	1/2	1-1/4	.328	.625	20.5
AM-43	.283	1/2	7/16	5/8	1-9/16	.219	.977	21.4

* Preferred core sizes.

Relative Power Handling Capacity (D) × E × F × G
 Window Area (D) × E × F × G
 Gross Area (D) × E - in.² (F) × G - in.² (lb.)
 Nominal Weight (lb.)
 AECO. Part Number
 NOMINAL CORE DIMENSIONS
 D E F G

AECO. Part Number	Nominal Weight (lb.)	D	E	F	G	Gross Area (D) × E - in. ²	Window Area (D) × E × F × G
AM-22	.405	5/8	1/2	1/2	1-9/16	.313	.781
AM-31	.457	1	1/2	7/16	1-1/8	.438	.563
AM-40	.425	3/4	1/2	1/2	1-1/8	.375	.703
AM-13	.479	3/4	1/2	1/2	1-9/16	.375	.781
AM-32	.374	3/4	3/8	7/8	1-1/2	.281	1.31
AM-19	.643	1	1/2	1/2	1-9/16	.500	.781
AM-56	.565	3/4	1/2	5/8	1-15/16	.375	1.21
AM-14	.664	1	1/2	5/8	1-9/16	.500	.977
AM-48	.752	3/4	11/16	5/8	1-9/16	.516	.977
AM-38	.467	7/8	3/8	29/32	1-25/32	.328	1.61
AM-44	.832	1	5/8	5/8	1-3/8	.625	.859
AM-9	.747	3/4	5/8	5/8	1-15/16	.469	1.21
AM-39	.996	1	5/8	5/8	1-9/16	.625	.977
AM-23	.996	1	5/8	5/8	1-15/16	.625	1.21
AM-51	1.50	1-1/2	11/16	5/8	1-9/16	1.03	.977
AM-41	1.21	1-1/4	9/16	5/8	2-5/16	.703	1.45
AM-52	1.14	1	5/8	3/4	2-5/16	.625	1.73
AM-63	1.01	3/4	3/4	15/16	2-1/16	.563	1.93
AM-35	1.84	1	1	5/8	1-15/16	1.00	1.21
AM-20	1.89	1	7/8	15/16	2-1/2	.875	2.34
AM-54	2.39	1	1-1/8	15/16	2-1/16	1.13	1.93
AM-50	1.87	3/4	1	1-1/8	2-7/8	.750	3.23
AM-1098	3.63	1-1/2	1-1/16	15/16	2-1/2	1.59	2.34
AM-59	2.34	1-3/4	9/16	1-3/8	2-1/2	.984	4.13
AM-1391	4.02	1-1/2	1	1	3	1.50	3.00
AM-47	3.75	1-1/2	1	1-1/8	2-7/8	1.50	3.23
AM-57	2.77	1	1	1-1/2	3-3/8	1.00	5.06
AM-1174	4.99	2	1	1	3	2.00	3.00
AM-28	5.64	1-1/8	1-5/8	1-3/8	3	1.83	4.13
AM-58	4.88	2	7/8	1-5/16	3-1/2	1.75	4.59

Handwritten notes and numbers:



- RD #20 = #18 = #16 = #12 = #10 =
- Δ 9 6 3.8 2.4 1.5
- SO #10 = #9 = #8 = #7 =
- Δ 10 = 13 = 17 = 20
- Δ 8 = 7 =
- Δ 40 = 33



ARNOLD SILECTRON CORES

For Dimensional Tolerances, See Latest Supplement.

For ready identification, these cores are stamped with the type designation "AL," then tied with RED string before plastic dipping.

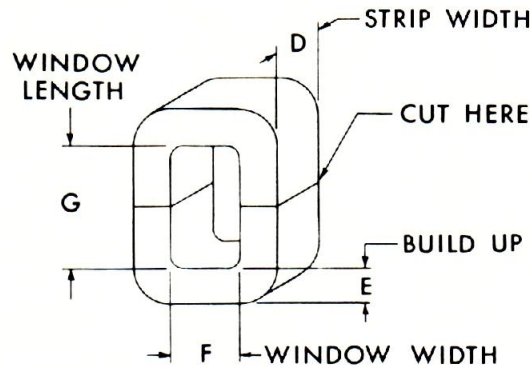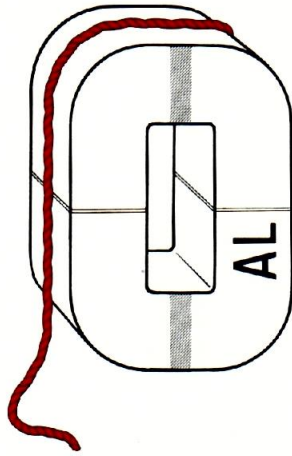

AECo. Part Number	Nominal Weight (lb.)	NOMINAL CORE DIMENSIONS				Gross Area (D×E)-in. ²	Window Area (F×G)-in. ²	Relative Power Handling Capacity (D×E×F×G ×100)-in. ⁴
		D	E	F	G			
AL-1214	.002	1/8	1/16	1/8	3/8	.008	.047	.037
AL-1215	.005	1/8	1/8	1/8	3/8	.016	.047	.075
AL-1216	.006	1/8	1/8	3/16	3/8	.016	.070	.110
AL-1132	.010	1/4	1/8	5/32	3/8	.031	.059	.180
AL-1217	.011	1/4	1/8	3/16	3/8	.031	.070	.220
*AL-1	.014	1/4	1/8	1/4	1/2	.031	.125	.390
AL-163	.018	1/4	5/32	1/4	1/2	.039	.125	.490
*AL-2	.027	1/4	3/16	1/4	5/8	.047	.156	.730
*AL-143	.034	1/4	1/4	1/4	1/2	.062	.125	.780
*AL-147	.023	1/4	1/8	5/16	1	.031	.313	.970
AL-161	.038	1/4	1/4	1/4	5/8	.062	.156	.970
*AL-3	.040	3/8	3/16	1/4	5/8	.070	.156	1.09
*AL-4	.045	1/4	1/4	1/4	7/8	.062	.219	1.36
*AL-5	.069	3/8	1/4	1/4	7/8	.094	.219	2.06
AL-71	.055	3/8	3/16	5/16	1	.070	.313	2.19
*AL-7	.066	3/8	7/32	5/16	1	.082	.313	2.57
*AL-6	.092	1/2	1/4	1/4	7/8	.125	.219	2.74
AL-62	.061	1/4	1/4	1/2	1-1/8	.062	.563	3.49
AL-69	.064	1/4	1/4	1/2	1-1/4	.062	.625	3.88
*AL-124	.100	1/2	1/4	5/16	1	.125	.313	3.91
AL-88	.130	3/8	3/8	5/16	1	.141	.313	4.41
AL-123	.110	1/2	1/4	3/8	1	.125	.375	4.69
AL-121	.100	3/8	1/4	1/2	1-5/16	.094	.656	6.17
*AL-8	.150	3/8	3/8	3/8	1-3/16	.141	.445	6.28
*AL-9	.200	1/2	3/8	3/8	1-3/16	.188	.445	8.37
*AL-13	.150	5/8	1/4	1/2	1-1/8	.156	.563	8.78
AL-41	.167	3/8	3/8	1/2	1-3/8	.141	.688	9.70
AL-192	.090	3/8	3/16	1-1/8	1-1/4	.070	1.41	9.87
*AL-10	.240	5/8	3/8	3/8	1-3/16	.234	.445	10.4
*AL-12	.240	1/2	7/16	1/2	1-1/8	.219	.563	12.3

* Preferred core sizes.

AEC Co. Part Number	Nominal Weight (lb.)	NOMINAL CORE DIMENSIONS				Gross Area (D×E)-in. ²	Window Area (F×G)-in. ²	Relative Power Handling Capacity (D×E×F×G ×100) in. ⁴
		D	E	F	G			
*AL-11	.290	3/4	3/8	3/8	1-3/16	.281	.445	12.5
*AL-135	.250	1/2	7/16	9/16	1-1/8	.219	.633	13.9
AL-33	.290	1/2	1/2	1/2	1-1/8	.250	.563	14.1
AL-142	.300	3/4	3/8	1/2	1-1/8	.281	.563	15.8
*AL-78	.350	3/4	5/16	5/16	2-1/4	.234	.703	16.5
AL-83	.270	3/4	5/16	5/8	1-1/4	.234	.781	18.3
*AL-14	.340	1/2	1/2	1/2	1-9/16	.250	.781	19.5
AL-152	.360	1/2	1/2	1/2	1-5/8	.250	.813	20.3
*AL-18	.300	1/2	7/16	5/8	1-9/16	.219	.977	21.4
AL-131	.460	1	7/16	1/2	1	.438	.500	21.9
*AL-15	.430	5/8	1/2	1/2	1-9/16	.313	.781	24.4
AL-32	.490	1	7/16	1/2	1-1/8	.438	.563	24.7
AL-190	.270	1/2	3/8	7/8	1-1/2	.188	1.31	24.7
*AL-16	.510	3/4	1/2	1/2	1-9/16	.375	.781	29.3
*AL-17	.690	1	1/2	1/2	1-9/16	.500	.781	39.1
AL-184	.590	1	7/16	5/8	1-1/2	.438	.938	41.1
AL-127	.820	3/4	3/4	3/4	1-1/8	.563	.844	47.5
*AL-19	.720	1	1/2	5/8	1-9/16	.500	.977	48.9
AL-21	.800	3/4	5/8	5/8	1-15/16	.469	1.21	56.8
AL-91	.510	1/2	1/2	15/16	2-1/2	.250	2.34	58.6
AL-112	.780	1	1/2	11/16	1-3/4	.500	1.20	60.0
*AL-20	.950	1	5/8	5/8	1-9/16	.625	.977	61.1
*AL-64	1.15	1-1/8	1/2	7/16	3	.563	1.31	73.9
*AL-22	1.06	1	5/8	5/8	1-15/16	.625	1.21	75.7
*AL-23	1.33	1-1/4	5/8	5/8	1-15/16	.781	1.21	94.6
AL-182	1.15	3/4	3/4	3/4	2-5/16	.563	1.73	97.4
*AL-24	1.22	1	5/8	3/4	2-5/16	.625	1.73	108
AL-195	1.69	1-1/4	5/8	1/2	3	.781	1.50	117
AL-99	1.33	1	5/8	15/16	2-1/2	.625	2.34	146
AL-1495	1.35	1	5/8	1	2-1/2	.625	2.50	156
AL-47	2.22	1	1	3/4	2-5/16	1.00	1.73	173
AL-100	1.51	1	5/8	1	3	.625	3.00	188
AL-133	1.86	1	13/16	15/16	2-1/2	.813	2.34	191
*AL-25	2.03	1	7/8	15/16	2-1/2	.875	2.34	205
AL-95	1.66	1	5/8	1	3-1/2	.625	3.50	219
AL-102	2.40	1	1	15/16	2-1/2	1.00	2.34	234
*AL-248	2.11	1-1/8	3/4	1-1/8	2-7/8	.844	3.23	275
AL-103	3.01	1-1/4	1	15/16	2-1/2	1.25	2.34	293
*AL-98	1.81	1	5/8	2	3	.625	6.00	375
AL-27	4.05	2	7/8	15/16	2-1/2	1.75	2.34	410
AL-118	3.05	1-1/4	15/16	1-7/16	2-1/2	1.17	3.59	421
AL-130	4.02	1-1/2	1	1	3	1.50	3.00	450
*AL-54	4.31	2	3/4	3/4	4	1.50	3.00	450
AL-36	3.59	1-1/4	1	1-3/8	3	1.25	4.13	516
AL-183	4.19	1-1/4	1-1/8	1-1/4	3-3/16	1.41	3.98	560



* Preferred core sizes.




ARNOLD SILECTRON CORES

For Dimensional Tolerances, See Latest Supplement.

For ready identification, these cores are stamped with the type designation "AL," then tied with RED string before plastic dipping.

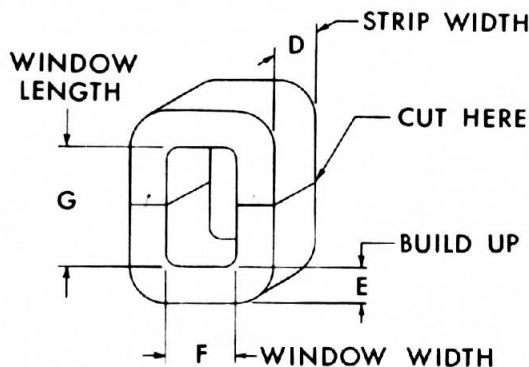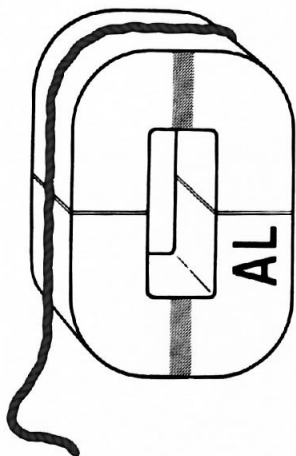

AECo. Part Number	Nominal Weight (lb.)	NOMINAL CORE DIMENSIONS				Gross Area (D×E)-in. ²	Window Area (F×G)-in. ²	Relative Power Handling Capacity (D×E×F×G ×100)-in. ⁴
		D	E	F	G			
AL-70	2.41	1-3/8	5/8	1-5/16	3-1/2	.859	6.78	583
AL-59	5.36	2	1	1	3	2.00	3.00	600
AL-144	6.22	2	1-1/8	1	3	2.25	3.00	675
AL-148	3.81	1-3/4	3/4	1-5/16	3-1/2	1.31	6.78	890
AL-89	7.45	2	1-1/4	1-1/4	3	2.50	3.75	938
AL-72	7.60	2	1-1/4	1-3/8	3	2.50	4.13	1030
AL-176	7.60	1-1/2	1-3/8	1-1/4	4-1/4	2.06	5.31	1090
AL-1409	11.1	2	1-1/2	7/8	4-1/2	3.00	3.94	1180
AL-199	7.73	1-5/8	1-1/4	1-5/16	4-5/8	2.03	6.07	1230
AL-193	11.2	2-1/2	1-1/4	1	4-1/2	3.13	4.50	1410
AL-185	10.8	2	1-1/2	1-9/16	3-9/16	3.00	5.57	1670
AL-1048	10.3	1	2-1/8	1-3/4	5	2.13	8.75	1860
AL-129	10.4	2	1-1/4	1-13/16	4-7/8	2.50	8.84	2210
AL-56	10.6	1-5/8	1-1/2	2	4-11/16	2.44	9.38	2290
AL-1184	17.5	2	2	2	4	4.00	8.00	3200
AL-1463	10.1	1-1/2	1-1/4	2-5/8	6-1/2	1.88	17.1	3210
AL-1195	31.6	2-1/2	1-7/8	2-1/2	8-1/2	4.69	21.3	9960
AL-1205	40.9	3-1/2	2	3	6	7.00	18.0	12600
AL-1044	66.8	3-1/8	3-3/8	3	5	10.6	15.0	15800
AL-1382	116	4	4	3	6	16.0	18.0	28800
AL-1271	84.2	3-1/4	3-3/8	5-1/4	5-1/2	11.0	28.9	31790
AL-1268	66.7	3-1/2	2	4-1/2	12	7.00	54.0	37800
AL-1071	115	3	3-3/4	2-3/4	12-1/2	11.3	34.4	38700
AL-1066	98.4	3-1/8	3	5	12	9.38	60.0	56300
AL-1145	109	2-3/4	3-3/8	6	13	9.28	78.0	72400
AL-1067	164	4	3-1/2	6	12-3/4	14.0	76.5	107000
AL-1269	141	2-1/2	3	8	26	7.50	208	156000
AL-1505	203	4	3-1/2	8-1/2	16	14.0	136	190000
AL-1079	238	4	4	8-1/2	16	16.0	136	218000

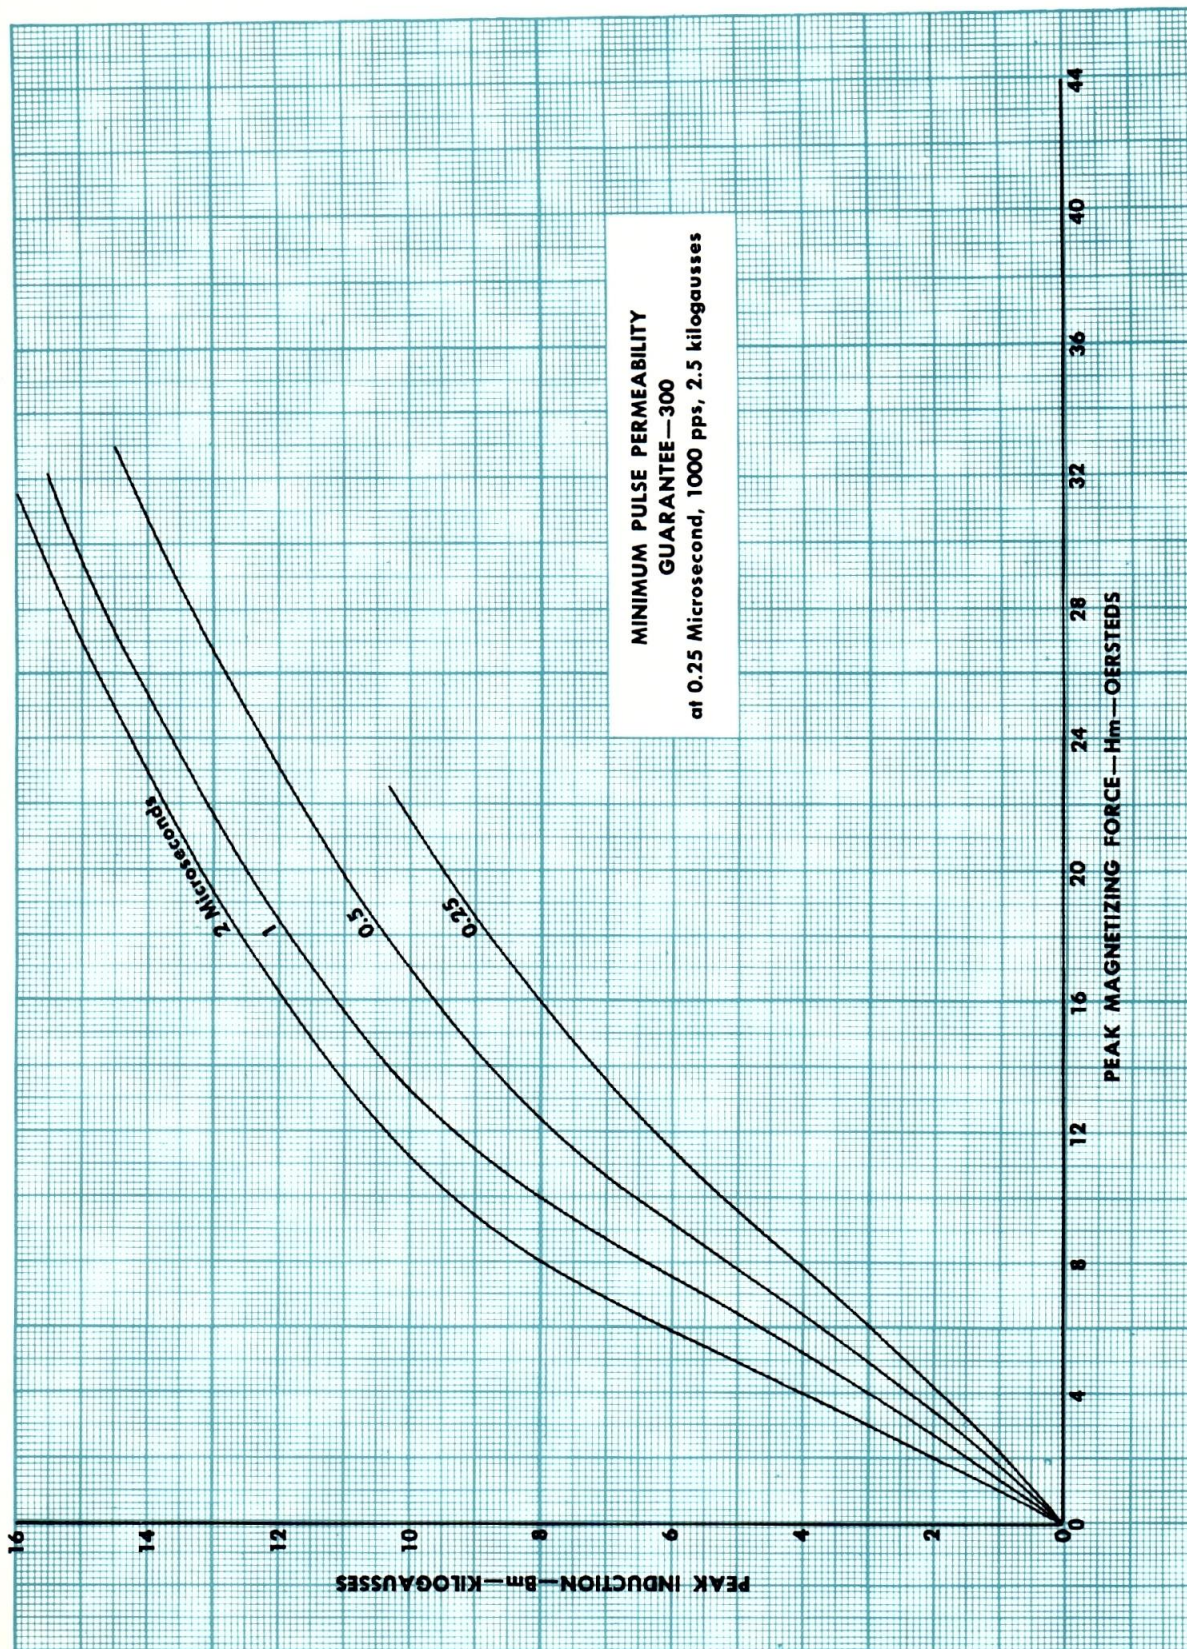

**FIG. 1—TYPICAL PULSE MAGNETIZATION CURVES
 FOR 1 MIL SILECTRON "C" CORES TYPE "AM"**

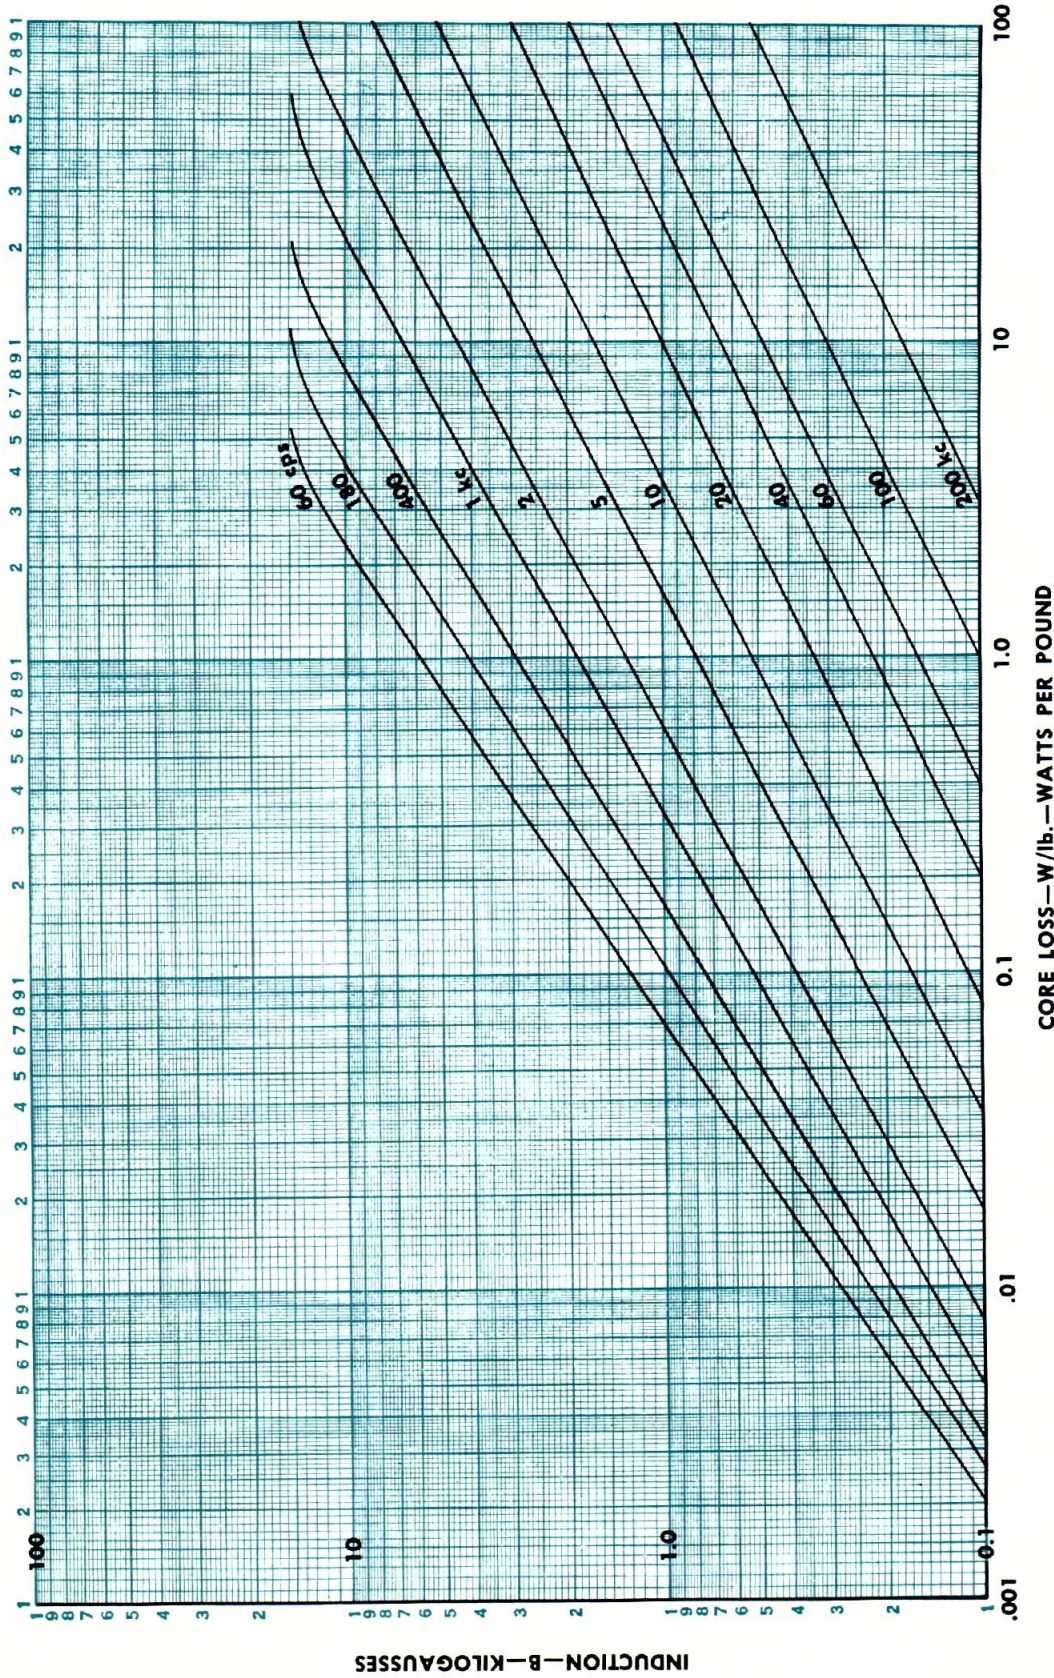


FIG. 2—TYPICAL CORE LOSS CURVES FOR 1 MIL SILECTRON "C" CORES TYPE "AM"

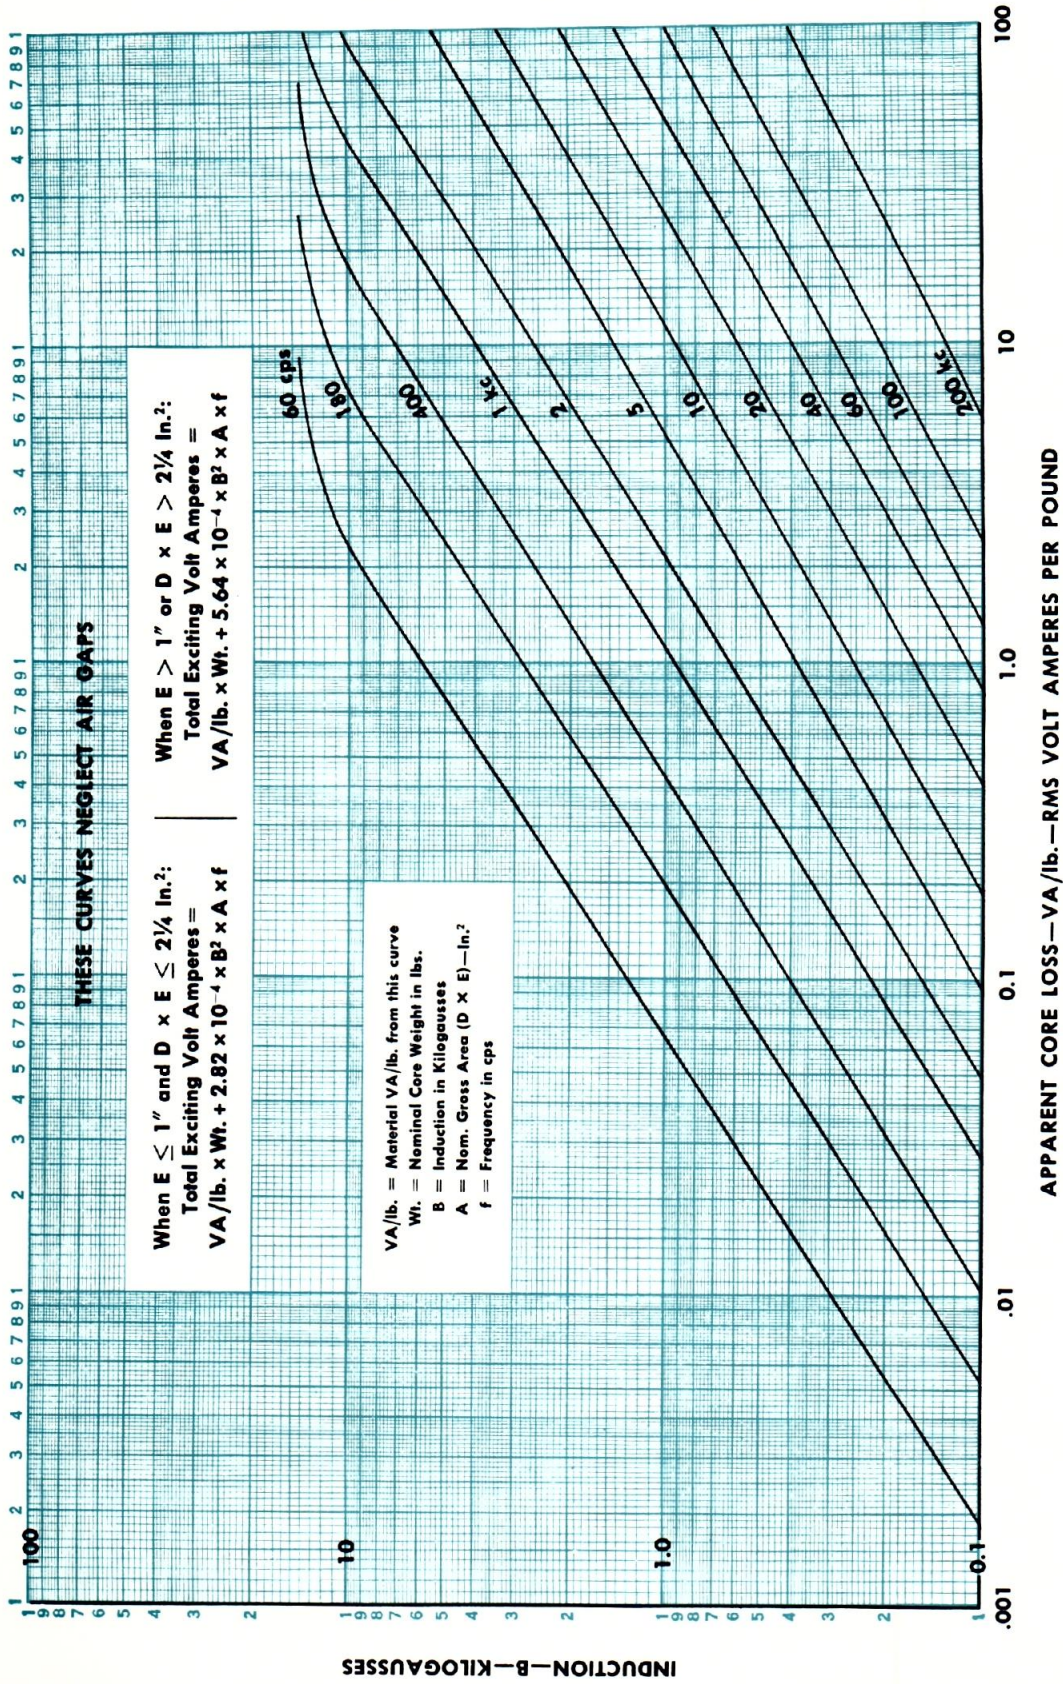


FIG. 3—TYPICAL APPARENT CORE LOSS CURVES FOR 1 MIL SILECTRON "C" CORES TYPE "AM"

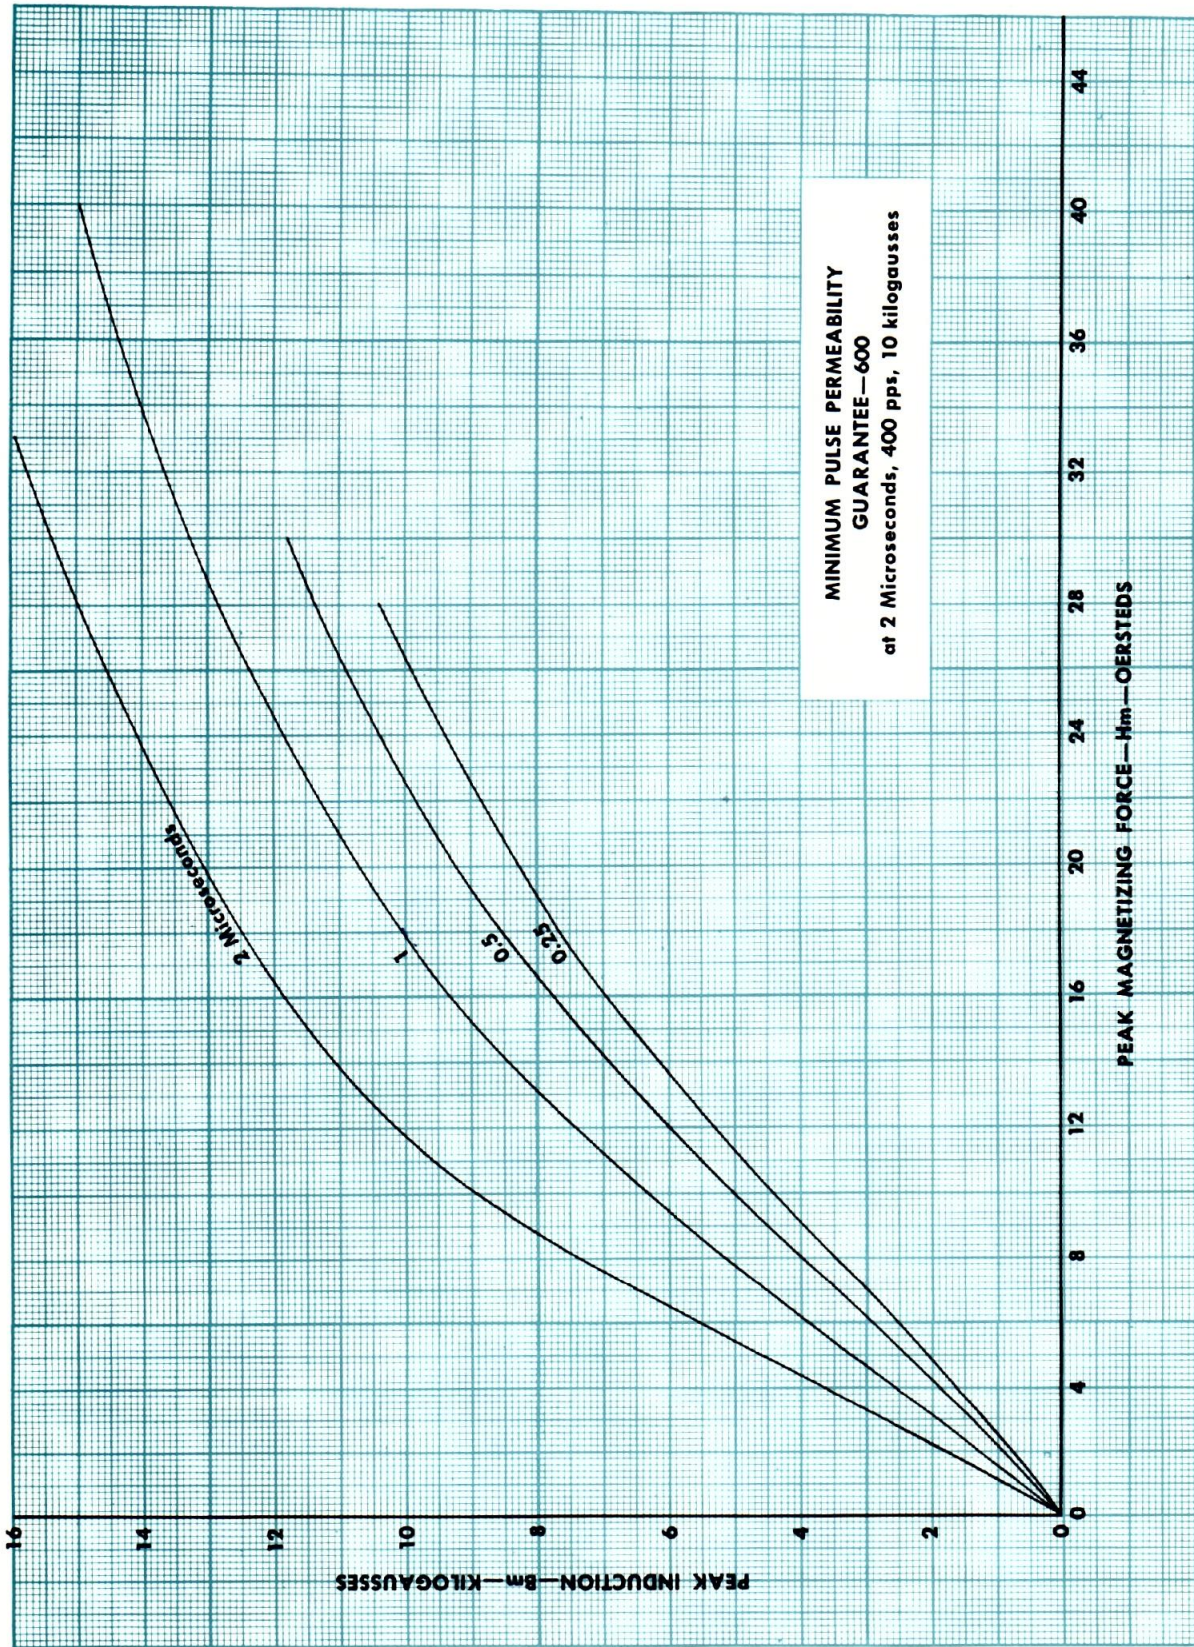


FIG. 4—TYPICAL PULSE MAGNETIZATION CURVES FOR 2 MIL SILECTRON "C" CORES TYPE "AL"

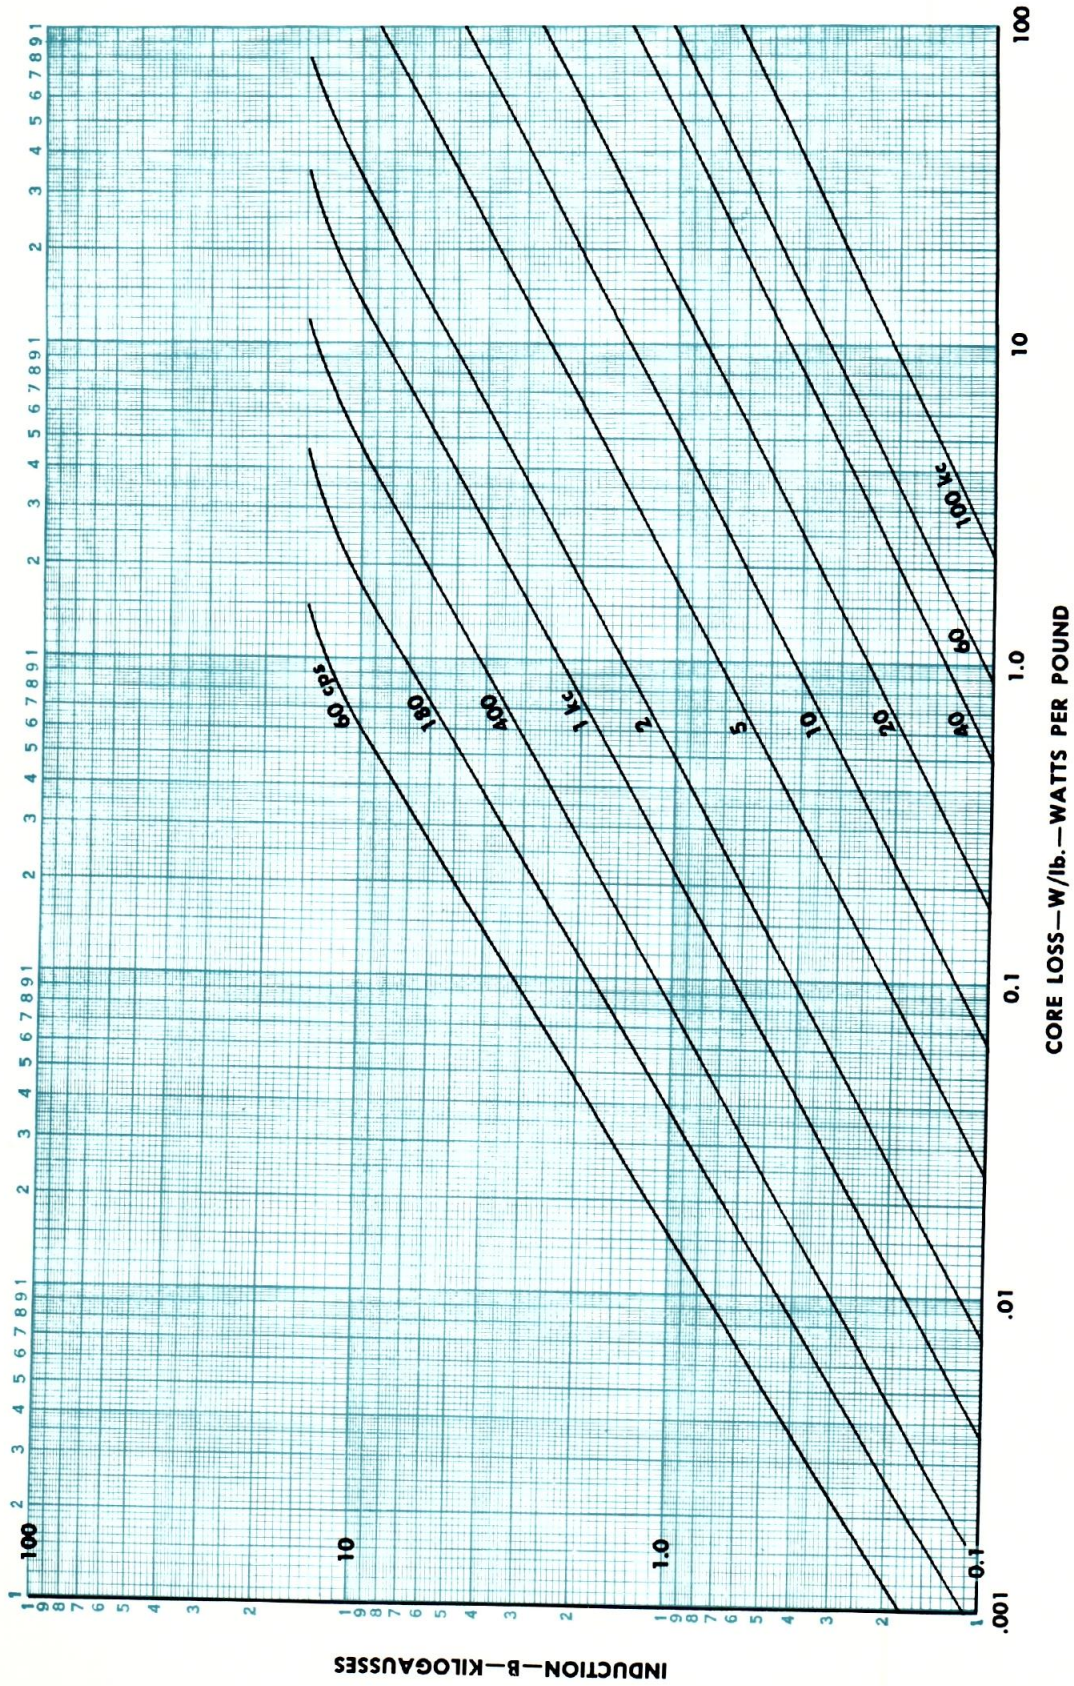


FIG. 5—TYPICAL CORE LOSS CURVES
FOR 2 MIL SILECTRON "C" CORES TYPE "AL"

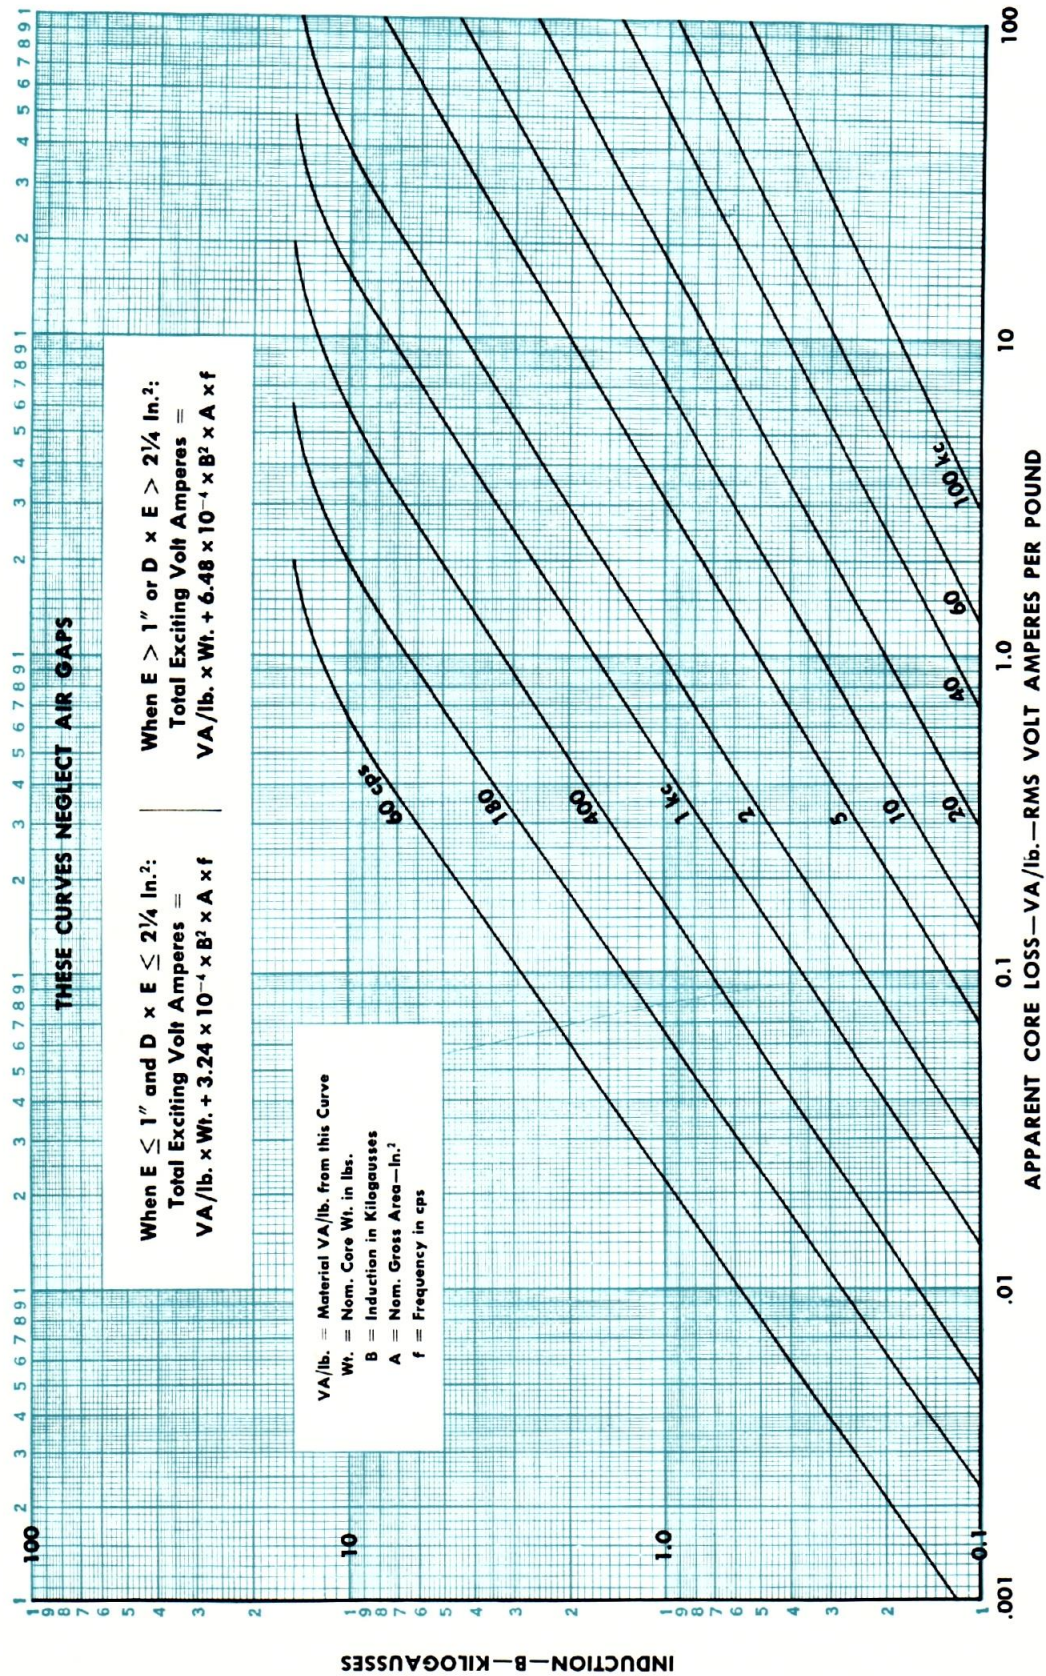


FIG. 6—TYPICAL APPARENT CORE LOSS CURVES FOR 2 MIL SILECTRON "C" CORES TYPE "AL"

4 MIL SILETRON "C" CORES

The 4 mil Siletron "C" cores are made in two different grades of material which carry different type numbers. Both types, the "AH" and "AZ," are generally used at 400 cps in transformer applications. They are also used in filter chokes, reactors and magnetic amplifiers at 400 cps, and in pulse transformers and many other magnetic components at higher frequencies.

The "AZ" type core is preferred for applications in which the core is operated at inductions above 16 kilogausses because of its higher permeability at high inductions. The core loss of the "AZ" type core, however, is practically the same as for the "AH" type.

At lower inductions the 4 mil cores can be used over a wide frequency range. The choice between a 4 mil and a 2 mil or 1 mil core would depend upon the frequency and induction specified. The choice of material thickness may be determined by reference to Figures 5, 6, 7 and 8. In comparing the 2 and 4 mil data, it should be remembered that the 2 mil curves (Figs. 5 and 6) show "typical values," whereas the 4 mil curves (Figs. 7 and 8) show maximum design values. The 2 mil curve values should be increased by approximately 30% in order to make a true comparison with the 4 mil curves.

The high normal and incremental permeabilities at inductions up to 15 kilogausses make 4 mil cores suitable for many types of filter chokes and reactors. These permeabilities are a function of core geometry, as well as the incremental induction and the dc magnetizing force applied to the core. Reference to Figure 12 will indicate how the normal permeability varies as a function of mean length of magnetic path for a peak induction of 10 kilogausses at 60 cps. The permeability shown in Figure 12 is calculated on the basis of the maximum permissible gap at the butt joint. For a comparison of the permeability which might be obtained with other gaps, refer

to Figure 23. Smaller gaps may be obtained by lapping and larger gaps may be obtained by the insertion of non-conducting shims.

Magnetic amplifier applications require a core with a rectangular hysteresis loop and with sharp saturation characteristics. The 4 mil Siletron "C" cores meet these requirements and are used in many 400 cps power magnetic amplifiers. Reference to Figs. 17, 19 and 22 shows that the "AZ" type of 4 mil Siletron is the obvious choice for this application. However, the "AH" type may also be used with good results. It is desirable to lap either type of core in this application to reduce the air gap and avoid excessive shearing over of the hysteresis loop, particularly with small cores.

Pulse transformers may use 4 mil cores in many instances with some reduction in incremental inductions. This is particularly true in designs with pulses of long duration (five microseconds or greater), low duty cycle, and where a short rise time is not required.

High frequency application requirements may be satisfactorily met with 4 mil cores. They must be designed, however, for a peak induction which will stay within the core loss and exciting current ratings of the unit. Where a range of frequencies is encountered, the design should be based upon the lowest frequency at which the unit must operate. A paramount reason why Arnold 4 mil Siletron cores may be used successfully at frequencies above 400 cps is the fact that the material does not exceed a maximum thickness of 4 mils. Since the average thickness is somewhat less than 4 mils, improved high frequency operation is possible.

The 4 mil type "AH" cores meet the electrical guarantees shown below when tested at 400 cps and 15 kilogausses. The type "AZ" cores are measured at 400 cps and 17.6 kilogausses. The guaranteed values are based on the nominal core weight as published in this catalog.

TYPE	PEAK INDUCTION AND FREQUENCY	MAXIMUM CORE LOSS—W/lb.	MAXIMUM VOLT AMPERES —MATERIAL PLUS GAP ALLOWANCE
AH	15 Kilogausses, 400 cps	10.0	$13.1 \times \text{Wt.} + 29.9 \times \text{A}^*$
AZ	17.6 Kilogausses, 400 cps	15.0	$39.5 \times \text{Wt.} + 41.1 \times \text{A}^{**}$

*When gross core area (A) exceeds $2\frac{1}{4}$ square inches, or build up (E) exceeds 1", or window width (F) is $1\frac{3}{8}$ " or more, or window length (G) is $4\frac{3}{8}$ " or more, use $59.8 \times \text{A}$ in place of $29.9 \times \text{A}$.

**When gross core area (A) exceeds $2\frac{1}{4}$ square inches, or build up (E) exceeds 1", or window width (F) is $1\frac{3}{8}$ " or more, or window length (G) is $4\frac{3}{8}$ " or more, use $82.2 \times \text{A}$ in place of $41.1 \times \text{A}$.



Arnold 4 mil "C" cores are manufactured to specifications that meet the requirements set forth in EIA Standard RS-217 for wound cut cores.



ARNOLD SILECTRON CORES

For Dimensional Tolerances, See Latest Supplement.

For ready identification, these cores are stamped with the type of designation "AH," then tied with YELLOW string before plastic dipping.

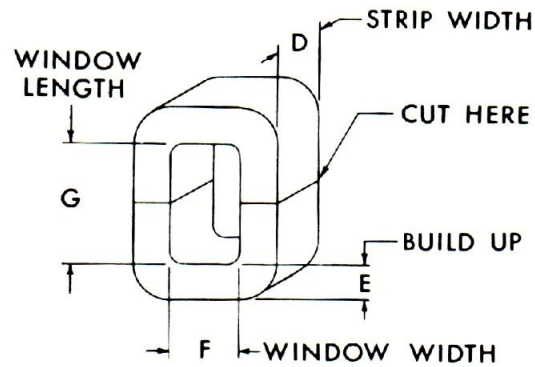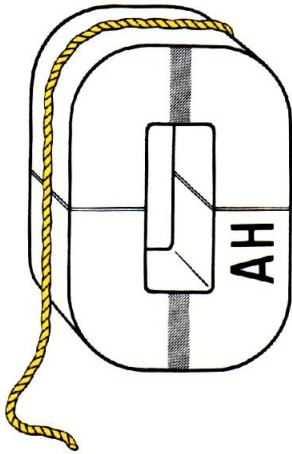

AECo. Part Number	Nominal Weight (lb.)	NOMINAL CORE DIMENSIONS				Gross Area (D×E)-in. ²	Window Area (F×G)-in. ²	Relative Power Handling Capacity (D×E×F×G ×100)-in. ⁴
		D	E	F	G			
*AH-121	.022	3/8	1/8	1/4	1/2	.047	.125	.588
*AH-447	.030	1/4	3/16	1/4	5/8	.047	.156	.733
*AH-231	.040	3/8	3/16	1/4	5/8	.070	.156	1.09
*AH-283	.050	1/4	1/4	1/4	7/8	.063	.219	1.38
*AH-99	.080	3/8	7/32	5/16	1	.082	.313	2.57
*AH-430	.060	3/8	3/16	3/8	1	.070	.375	2.63
*AH-215	.090	1/2	1/4	1/4	7/8	.125	.219	2.74
*AH-246	.080	3/8	1/4	5/16	1	.094	.313	2.94
*AH-115	.080	3/8	1/4	3/8	1	.094	.375	3.53
*AH-425	.120	3/4	7/32	1/4	7/8	.164	.219	3.59
*AH-38	.070	1/4	1/4	1/2	1-5/16	.063	.656	4.13
*AH-235	.090	3/8	1/4	3/8	1-3/16	.094	.445	4.18
*AH-126	.110	3/8	5/16	3/8	1	.117	.375	4.39
*AH-382	.135	5/8	1/4	3/8	1	.156	.375	5.85
*AH-39	.100	3/8	1/4	1/2	1-5/16	.094	.656	6.17
*AH-114	.120	1/2	1/4	1/2	1	.125	.500	6.25
*AH-363	.160	5/8	9/32	3/8	1	.176	.375	6.60
*AH-137	.150	5/8	1/4	3/8	1-3/16	.156	.445	6.94
*AH-1	.110	1/2	1/4	1/2	1-1/8	.125	.563	7.04
*AH-407	.173	3/4	1/4	3/8	1-1/8	.188	.422	7.93
*AH-2	.130	3/4	3/16	1/2	1-1/8	.141	.563	7.94
*AH-40	.140	1/2	1/4	1/2	1-5/16	.125	.656	8.20
AH-356	.172	5/8	9/32	7/16	1-1/8	.176	.492	8.66
AH-140	.154	5/8	1/4	1/2	1-1/8	.156	.563	8.78
*AH-41	.170	5/8	1/4	1/2	1-5/16	.156	.656	10.2
*AH-108	.244	5/8	3/8	3/8	1-3/16	.234	.445	10.4
*AH-3	.190	3/4	1/4	1/2	1-1/8	.188	.563	10.6
*AH-43	.150	3/8	5/16	5/8	1-9/16	.117	.977	11.4
*AH-42	.200	3/4	1/4	1/2	1-5/16	.188	.656	12.3
*AH-361	.290	3/4	3/8	3/8	1-3/16	.281	.445	12.5

* Preferred core sizes.

AEC Co. Part Number	Nominal Weight (lb.)	NOMINAL CORE DIMENSIONS				Gross Area (D×E)-in. ²	Window Area (F×G)-in. ²	Relative Power Handling Capacity (D×E×F×G ×100)-in. ⁴
		D	E	F	G			
AH-316	.190	3/8	3/8	5/8	1-9/16	.141	.977	13.8
*AH-138	.300	1/2	1/2	1/2	1-1/8	.250	.563	14.1
*AH-4	.220	7/8	7/32	1/2	1-1/2	.191	.750	14.3
AH-405	.270	5/8	3/8	1/2	1-1/4	.234	.625	14.6
*AH-9	.200	5/8	1/4	5/8	1-9/16	.156	.977	15.2
*AH-44	.210	1/2	5/16	5/8	1-9/16	.156	.977	15.2
*AH-253	.280	5/8	3/8	1/2	1-5/16	.234	.656	15.4
*AH-310	.300	3/4	3/8	1/2	1-1/8	.281	.563	15.8
AH-383	.290	3/4	5/16	1/2	1-9/16	.234	.781	18.3
*AH-5	.300	1	1/4	1/2	1-1/2	.250	.750	18.8
*AH-45	.260	5/8	5/16	5/8	1-9/16	.195	.977	19.1
*AH-183	.350	1/2	1/2	1/2	1-9/16	.250	.781	19.5
*AH-49	.230	3/8	3/8	3/4	1-15/16	.141	1.45	20.5
*AH-245	.370	3/4	3/8	1/2	1-9/16	.281	.781	22.0
*AH-46	.310	3/4	5/16	5/8	1-9/16	.234	.977	22.9
*AH-177	.430	5/8	1/2	1/2	1-9/16	.313	.781	24.5
*AH-129	.470	7/8	7/16	1/2	1-5/16	.383	.656	25.1
AH-282	.413	5/8	1/2	5/8	1-5/16	.313	.820	25.7
*AH-47	.360	7/8	5/16	5/8	1-9/16	.273	.977	26.7
*AH-50	.300	1/2	3/8	3/4	1-15/16	.188	1.45	27.3
*AH-11	.360	1	9/32	5/8	1-9/16	.281	.977	27.5
*AH-408	.520	7/8	7/16	7/16	1-11/16	.383	.738	28.3
*AH-7	.490	1	3/8	1/2	1-9/16	.375	.781	29.3
*AH-6	.520	3/4	1/2	1/2	1-9/16	.375	.781	29.3
*AH-409	.520	7/8	13/32	7/16	1-15/16	.355	.848	30.1
*AH-48	.410	1	5/16	5/8	1-9/16	.313	.977	30.6
AH-371	.450	7/8	3/8	5/8	1-9/16	.328	.977	32.0
AH-200	.520	1	3/8	1/2	1-3/4	.375	.875	32.8
*AH-51	.380	5/8	3/8	3/4	1-15/16	.234	1.45	34.0
AH-117	.530	5/8	9/16	5/8	1-9/16	.352	.977	34.4
*AH-255	.540	3/4	1/2	5/8	1-9/16	.375	.977	36.6
*AH-14	.480	1-1/8	5/16	5/8	1-11/16	.352	1.06	37.2
*AH-223	.680	1	1/2	1/2	1-1/2	.500	.750	37.5
*AH-161	.600	5/8	5/8	5/8	1-9/16	.391	.977	38.2
*AH-8	.700	1	1/2	1/2	1-9/16	.500	.781	39.1
AH-208	.890	1-1/8	5/8	1/2	1-1/8	.703	.563	39.6
AH-52	.450	3/4	3/8	3/4	1-15/16	.281	1.45	40.8
AH-57	.410	1/2	7/16	7/8	2-1/4	.219	1.97	43.1
AH-306	.640	1	7/16	5/8	1-11/16	.438	1.05	46.0
AH-53	.530	7/8	3/8	3/4	1-15/16	.328	1.45	47.7
*AH-12	.730	1	1/2	5/8	1-9/16	.500	.977	48.9
*AH-300	.580	1	3/8	3/4	1-13/16	.375	1.36	51.0
AH-136	.770	7/8	9/16	5/8	1-11/16	.492	1.05	51.7
AH-209	.700	1	7/16	5/8	1-15/16	.438	1.21	53.0
*AH-10	.840	7/8	5/8	5/8	1-9/16	.547	.977	53.4



* Preferred core sizes.



ARNOLD SILECTRON CORES

For Dimensional Tolerances, See Latest Supplement.

For ready identification, these cores are stamped with the type of designation "AH," then tied with YELLOW string before plastic dipping.

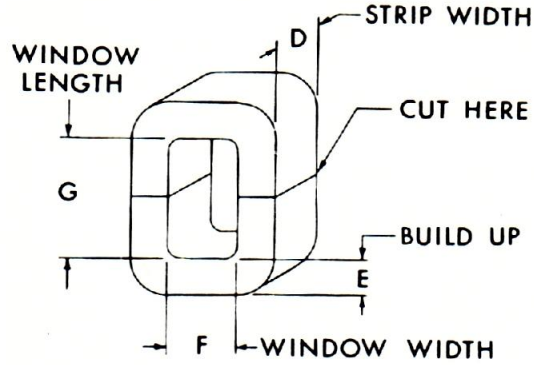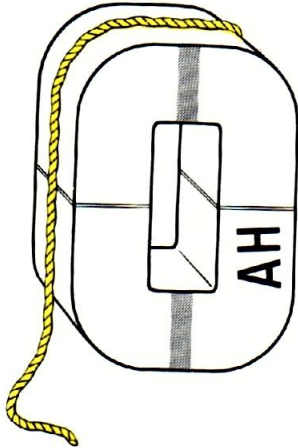

AECo. Part Number	Nominal Weight (lb.)	NOMINAL CORE DIMENSIONS				Gross Area (D×E)-in. ²	Window Area (F×G)-in. ²	Relative Power Handling Capacity (D×E×F×G ×100)-in. ⁴
		D	E	F	G			
AH-58	.510	5/8	7/16	7/8	2-1/4	.273	1.97	53.8
*AH-54	.600	1	3/8	3/4	1-15/16	.375	1.45	54.5
AH-237	.870	1-1/8	9/16	3/4	1-3/16	.633	.891	56.4
*AH-17	.730	1-1/4	3/8	5/8	1-15/16	.469	1.21	56.8
AH-357	.780	1-1/8	7/16	5/8	1-15/16	.492	1.21	59.5
*AH-224	.960	1-1/8	9/16	9/16	1-11/16	.633	.949	60.1
*AH-13	.960	1	5/8	5/8	1-9/16	.625	.977	61.1
AH-55	.680	1-1/8	3/8	3/4	1-15/16	.422	1.45	61.3
AH-296	.620	7/8	3/8	3/4	2-1/2	.328	1.88	61.5
AH-135	.890	7/8	5/8	11/16	1-11/16	.547	1.16	63.5
AH-65	.550	1/2	1/2	1	2-9/16	.250	2.56	64.1
AH-59	.620	3/4	7/16	7/8	2-1/4	.328	1.97	64.6
*AH-20	.680	1-1/4	5/16	3/4	2-5/16	.391	1.73	67.8
*AH-56	.750	1-1/4	3/8	3/4	1-15/16	.469	1.45	68.2
AH-60	.710	7/8	7/16	7/8	2-1/4	.383	1.97	75.4
*AH-15	1.08	1	5/8	5/8	1-15/16	.625	1.21	75.7
AH-24	.650	7/8	3/8	15/16	2-1/2	.328	2.34	76.9
*AH-410	.930	1-1/8	7/16	5/8	2-1/2	.492	1.56	76.9
AH-388	.890	1-1/2	3/8	3/4	1-7/8	.563	1.41	79.4
AH-66	.670	5/8	1/2	1	2-9/16	.313	2.56	80.2
*AH-16	1.21	1-1/8	5/8	5/8	1-15/16	.703	1.21	85.1
*AH-61	.820	1	7/16	7/8	2-1/4	.438	1.97	86.2
AH-239	1.12	1	5/8	3/4	1-15/16	.625	1.45	90.6
*AH-18	1.35	1-1/4	5/8	5/8	1-15/16	.781	1.21	94.6
AH-455	1.23	7/8	3/4	3/4	1-15/16	.656	1.45	95.1
AH-67	.800	3/4	1/2	1	2-9/16	.375	2.56	96.1
*AH-62	.930	1-1/8	7/16	7/8	2-1/4	.492	1.97	96.9
*AH-22	1.01	1-1/2	3/8	3/4	2-5/16	.563	1.73	97.6
AH-272	.960	1	1/2	7/8	2-1/4	.500	1.97	98.5
*AH-412	1.29	1-1/4	17/32	5/8	2-1/2	.664	1.56	103.8

* Preferred core sizes.

AECO. Part Number	Nominal Weight (lb.)	NOMINAL CORE DIMENSIONS				Gross Area (D×E)-in. ²	Window Area (F×G)-in. ²	Relative Power Handling Capacity (D×E×F×G ×100)-in. ⁴
		D	E	F	G			
AH-389	1.18	2	3/8	3/4	1-7/8	.750	1.41	106
*AH-63	1.02	1-1/4	7/16	7/8	2-1/4	.547	1.97	108
AH-68	.940	7/8	1/2	1	2-9/16	.438	2.56	112
AH-75	.850	5/8	9/16	1-1/8	2-7/8	.352	3.23	114
*AH-35	1.13	3/4	3/4	1-3/16	1-3/4	.563	2.08	117
*AH-64	1.13	1-3/8	7/16	7/8	2-1/4	.602	1.97	119
AH-289	1.56	1-1/8	11/16	3/4	2-5/16	.773	1.73	127
AH-69	1.07	1	1/2	1	2-9/16	.500	2.56	128
*AH-27	1.12	1-1/2	3/8	15/16	2-1/2	.563	2.34	132
AH-76	1.01	3/4	9/16	1-1/8	2-7/8	.422	3.23	137
AH-70	1.20	1-1/8	1/2	1	2-9/16	.563	2.56	144
*AH-19	1.75	1-1/8	3/4	3/4	2-5/16	.844	1.73	146
*AH-26	1.30	1-1/4	1/2	15/16	2-1/2	.625	2.34	147
*AH-86	1.04	5/8	5/8	1-1/4	3-3/16	.391	3.98	156
AH-77	1.18	7/8	9/16	1-1/8	2-7/8	.492	3.23	159
AH-71	1.34	1-1/4	1/2	1	2-9/16	.625	2.56	160
AH-293	1.93	1-1/8	3/4	3/4	2-3/4	.844	2.06	174
*AH-28	1.56	1-1/2	1/2	15/16	2-1/2	.750	2.34	176
AH-72	1.47	1-3/8	1/2	1	2-9/16	.688	2.56	176
*AH-21	2.13	1-3/8	3/4	3/4	2-5/16	1.031	1.73	179
AH-309	1.63	1-3/8	9/16	15/16	2-1/2	.773	2.34	181
AH-78	1.35	1	9/16	1-1/8	2-7/8	.563	3.23	182
AH-204	2.16	1-3/8	3/4	3/4	2-3/8	1.03	1.78	184
AH-87	1.25	3/4	5/8	1-1/4	3-3/16	.469	3.90	187
AH-73	1.60	1-1/2	1/2	1	2-9/16	.750	2.56	192
*AH-23	2.33	1-1/2	3/4	3/4	2-5/16	1.13	1.73	195
AH-79	1.52	1-1/8	9/16	1-1/8	2-7/8	.633	3.23	205
AH-74	1.74	1-5/8	1/2	1	2-9/16	.813	2.56	208
AH-88	1.45	7/8	5/8	1-1/4	3-3/16	.547	3.98	218
*AH-29	2.03	1-1/2	5/8	15/16	2-1/2	.938	2.34	220
*AH-30	1.77	1-1/2	1/2	1	3	.750	3.00	225
AH-80	1.69	1-1/4	9/16	1-1/8	2-7/8	.703	3.23	227
AH-89	1.66	1	5/8	1-1/4	3-3/16	.625	3.98	249
AH-81	1.85	1-3/8	9/16	1-1/8	2-7/8	.773	3.23	250
AH-82	2.02	1-1/2	9/16	1-1/8	2-7/8	.844	3.23	273
AH-90	1.87	1-1/8	5/8	1-1/4	3-3/16	.703	3.98	280
AH-83	2.19	1-5/8	9/16	1-1/8	2-7/8	.915	3.23	296
AH-396	2.35	2	1/2	1	3	1.00	3.00	300
*AH-25	3.08	1-3/8	15/16	15/16	2-1/2	1.29	2.34	302
AH-91	2.08	1-1/4	5/8	1-1/4	3-3/16	.781	3.98	311
AH-84	2.35	1-3/4	9/16	1-1/8	2-7/8	.984	3.23	318
AH-264	2.67	1-3/4	5/8	1	3	1.09	3.00	328
*AH-188	2.85	1-1/2	3/4	1	3	1.13	3.00	338
AH-85	2.51	1-7/8	9/16	1-1/8	2-7/8	1.06	3.23	341
AH-92	2.28	1-3/8	5/8	1-1/4	3-3/16	.859	3.98	349



* Preferred core sizes.



ARNOLD SILECTRON CORES

For Dimensional Tolerances, See Latest Supplement.

For ready identification, these cores are stamped with the type of designation "AH," then tied with YELLOW string before plastic dipping.

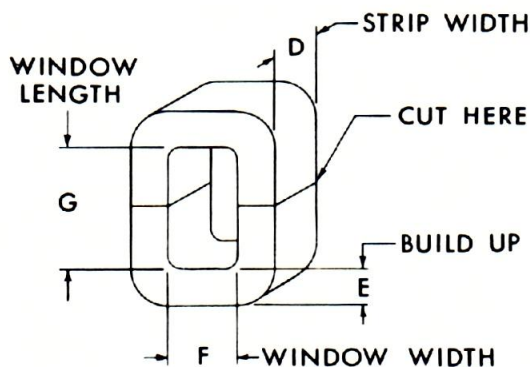
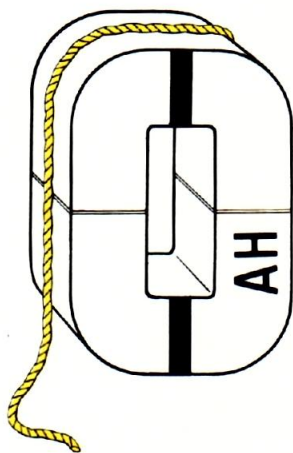


AECo. Part Number	Nominal Weight (lb.)	NOMINAL CORE DIMENSIONS				Gross Area (D×E)-in. ²	Window Area (F×G)-in. ²	Relative Power Handling Capacity (D×E×F×G ×100)-in. ⁴
		D	E	F	G			
AH-37	2.22	1-3/4	1/2	1-3/8	3	.875	4.13	361
AH-93	2.49	1-1/2	5/8	1-1/4	3-3/16	.938	3.98	374
AH-94	2.69	1-5/8	5/8	1-1/4	3-3/16	1.02	3.98	405
*AH-95	2.91	1-3/4	5/8	1-1/4	3-3/16	1.09	3.98	436
*AH-31	4.08	1-1/2	1	1	3	1.50	3.00	450
AH-96	3.11	1-7/8	5/8	1-1/4	3-3/16	1.17	3.98	467
AH-32	4.40	1-5/8	1	1	3	1.63	3.00	488
AH-97	3.32	2	5/8	1-1/4	3-3/16	1.25	3.98	498
*AH-33	4.75	1-3/4	1	1	3	1.75	3.00	525
AH-440	2.61	1-1/4	5/8	1-5/8	4-3/16	.781	6.81	532
*AH-34	5.43	2	1	1	3	2.00	3.00	600
*AH-155	4.07	2	3/4	1-3/8	3	1.50	4.13	619
AH-442	3.54	1-3/8	3/4	1-5/8	4-3/16	1.03	6.81	702
AH-400	5.92	2-1/2	3/4	1-3/8	3-7/8	1.88	5.33	727
AH-373	4.66	2	25/32	1-7/16	3-7/16	1.56	4.94	772
AH-393	8.12	2-1/4	1-1/4	1	3	2.81	3.00	844
AH-475	6.91	2	1	1-1/4	4-1/4	2.00	5.31	1060
AH-163	4.91	1-3/4	3/4	1-3/4	4-11/16	1.31	8.20	1080
AH-166	6.00	2-1/8	13/16	1-5/8	4-3/16	1.73	6.81	1180
AH-444	5.88	1-1/2	1	1-3/4	4-11/16	1.50	8.20	1230
AH-473	6.35	2-1/4	13/16	1-5/8	4-3/16	1.83	6.80	1240
AH-320	7.53	2	1	1-5/8	4-1/2	2.00	7.31	1460
AH-185	12.6	2	1-1/2	1-3/4	4-1/2	3.00	7.88	1970
AH-476	12.8	2	1-1/2	1-3/4	4-11/16	3.00	8.20	2460
AH-1207	22.8	2-3/4	1-3/4	1-3/4	5-1/4	4.81	9.19	4420
AH-1112	20.2	2	2	2-7/8	4-3/8	4.00	12.6	5030
AH-1083	21.5	3	1-1/4	2-1/2	7-1/4	3.75	18.1	6800
AH-1154	35.5	3	2	3-5/8	5-3/8	6.00	19.5	11700
AH-1172	49.7	4	1-1/2	4-1/2	10	6.00	45.0	27000
AH-1430	129.0	3	3-1/4	5-1/2	16-1/2	9.75	90.8	88500

* Preferred core sizes.

For Dimensional Tolerances, See Latest Supplement.

For ready identification, these cores are stamped with the type designation "AZ," then tied with YELLOW-BLACK string before plastic dipping.

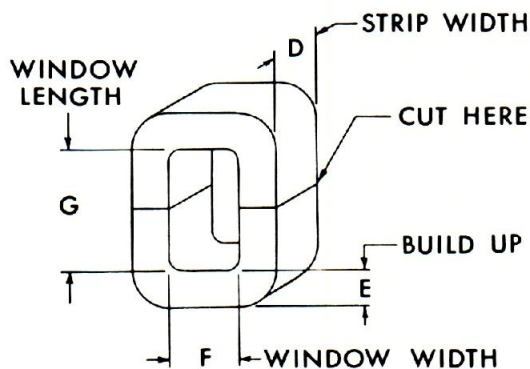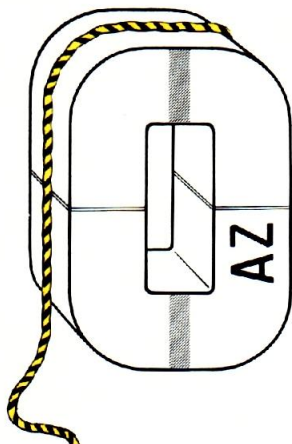

AECo. Part Number	Nominal Weight (lb.)	NOMINAL CORE DIMENSIONS				Gross Area (D×E)-in. ²	Window Area (F×G)-in. ²	Relative Power Handling Capacity (D×E×F×G ×100)-in. ⁴
		D	E	F	G			
*AZ-2	.04	3/8	3/16	1/4	5/8	.070	.156	1.09
*AZ-4	.06	3/8	3/16	3/8	1	.070	.375	2.63
*AZ-45	.08	3/8	1/4	3/8	1	.094	.375	3.53
*AZ-44	.11	3/8	5/16	3/8	1	.117	.375	4.39
AZ-46	.11	1/2	1/4	1/2	1	.125	.500	6.25
*AZ-1	.12	1/2	1/4	1/2	1-1/8	.125	.563	7.04
AZ-56	.14	1/2	1/4	1/2	1-5/16	.125	.656	8.20
*AZ-55	.17	5/8	1/4	1/2	1-5/16	.156	.656	10.2
AZ-25	.23	1/2	13/32	9/16	1-1/8	.203	.633	12.9
*AZ-53	.21	1/2	5/16	5/8	1-9/16	.156	.977	15.2
*AZ-5	.34	3/4	3/8	5/8	1-1/4	.281	.781	22.0
AZ-48	.52	3/4	1/2	1/2	1-9/16	.375	.781	29.3
*AZ-14	.58	1	3/8	5/8	1-15/16	.375	1.21	45.4
*AZ-12	.67	1-1/4	3/8	5/8	1-11/16	.469	1.06	49.5
AZ-8	.89	1	9/16	5/8	1-3/4	.563	1.09	61.6
AZ-15	.65	1	3/8	1-3/16	1-3/4	.375	2.08	77.9
*AZ-38	1.01	1-3/8	7/16	11/16	2-1/16	.602	1.42	85.4
AZ-6	.91	1	1/2	1-3/16	1-3/4	.500	2.08	104
AZ-10	1.28	1-1/8	5/8	1	1-3/4	.703	1.75	123
*AZ-9	1.03	1	1/2	1-7/16	2	.500	2.88	144
AZ-7	1.88	1-1/2	5/8	1	2-1/8	.938	2.13	199
AZ-39	2.11	1-1/2	5/8	15/16	2-11/16	.938	2.52	236
AZ-16	2.56	1-1/2	11/16	1	3	1.032	3.00	310
AZ-42	3.60	1-3/4	3/4	15/16	3-1/2	1.31	3.28	431
AZ-13	3.93	1-3/4	13/16	1-3/8	3	1.42	4.13	587

* Preferred core sizes.

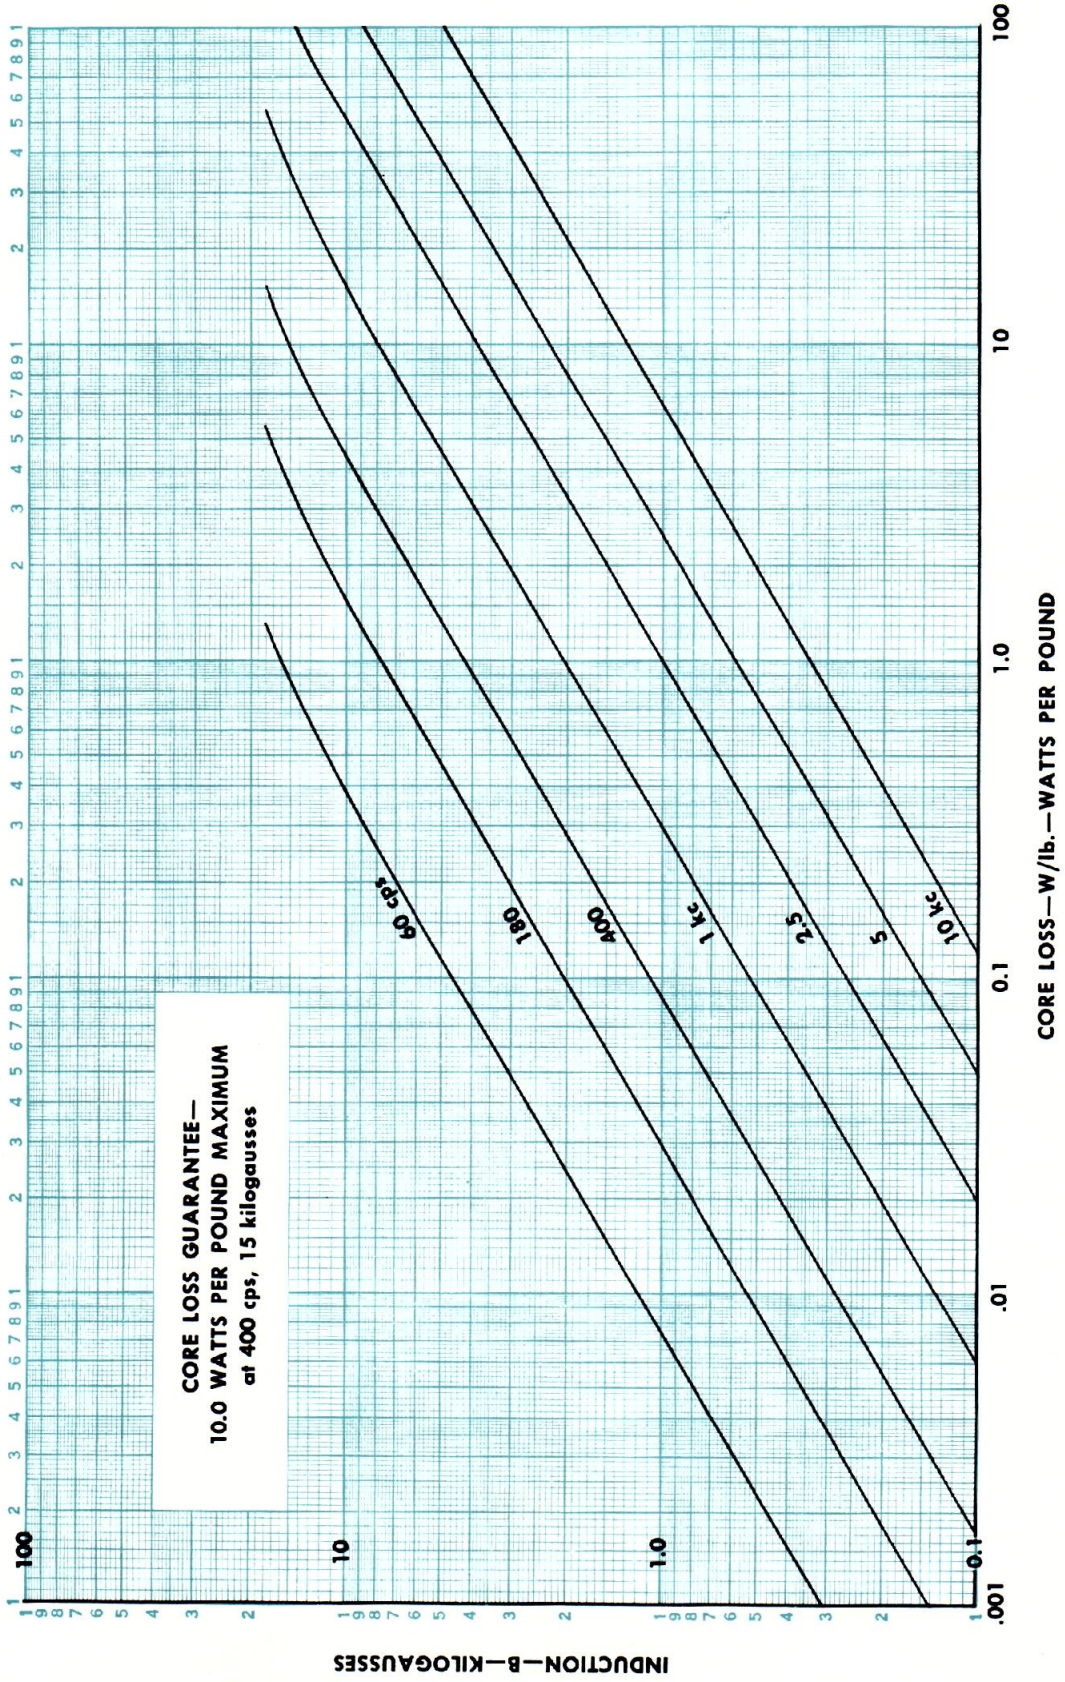


FIG. 7—DESIGN CURVES SHOWING MAXIMUM CORE LOSS FOR 4 MIL SILELECTRON "C" CORES TYPE "AH"

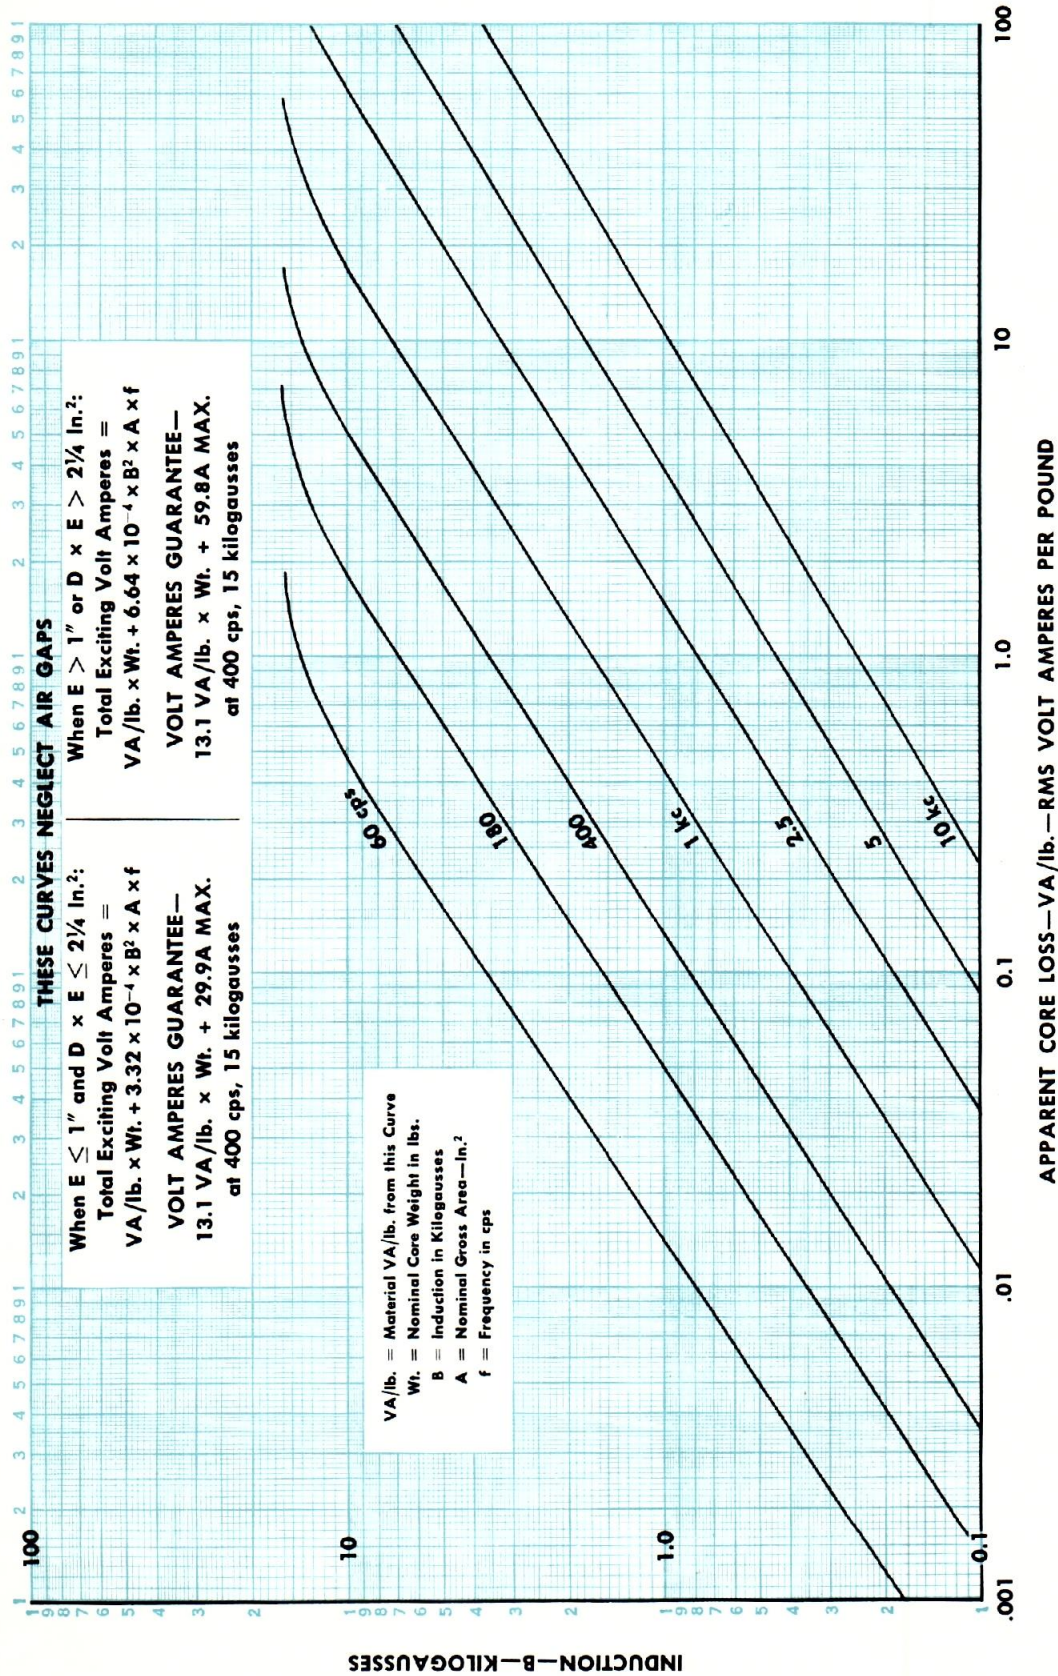


FIG. 8—DESIGN CURVES SHOWING MAXIMUM APPARENT CORE LOSS FOR 4 MIL SILECTRON "C" CORES TYPE "AH"

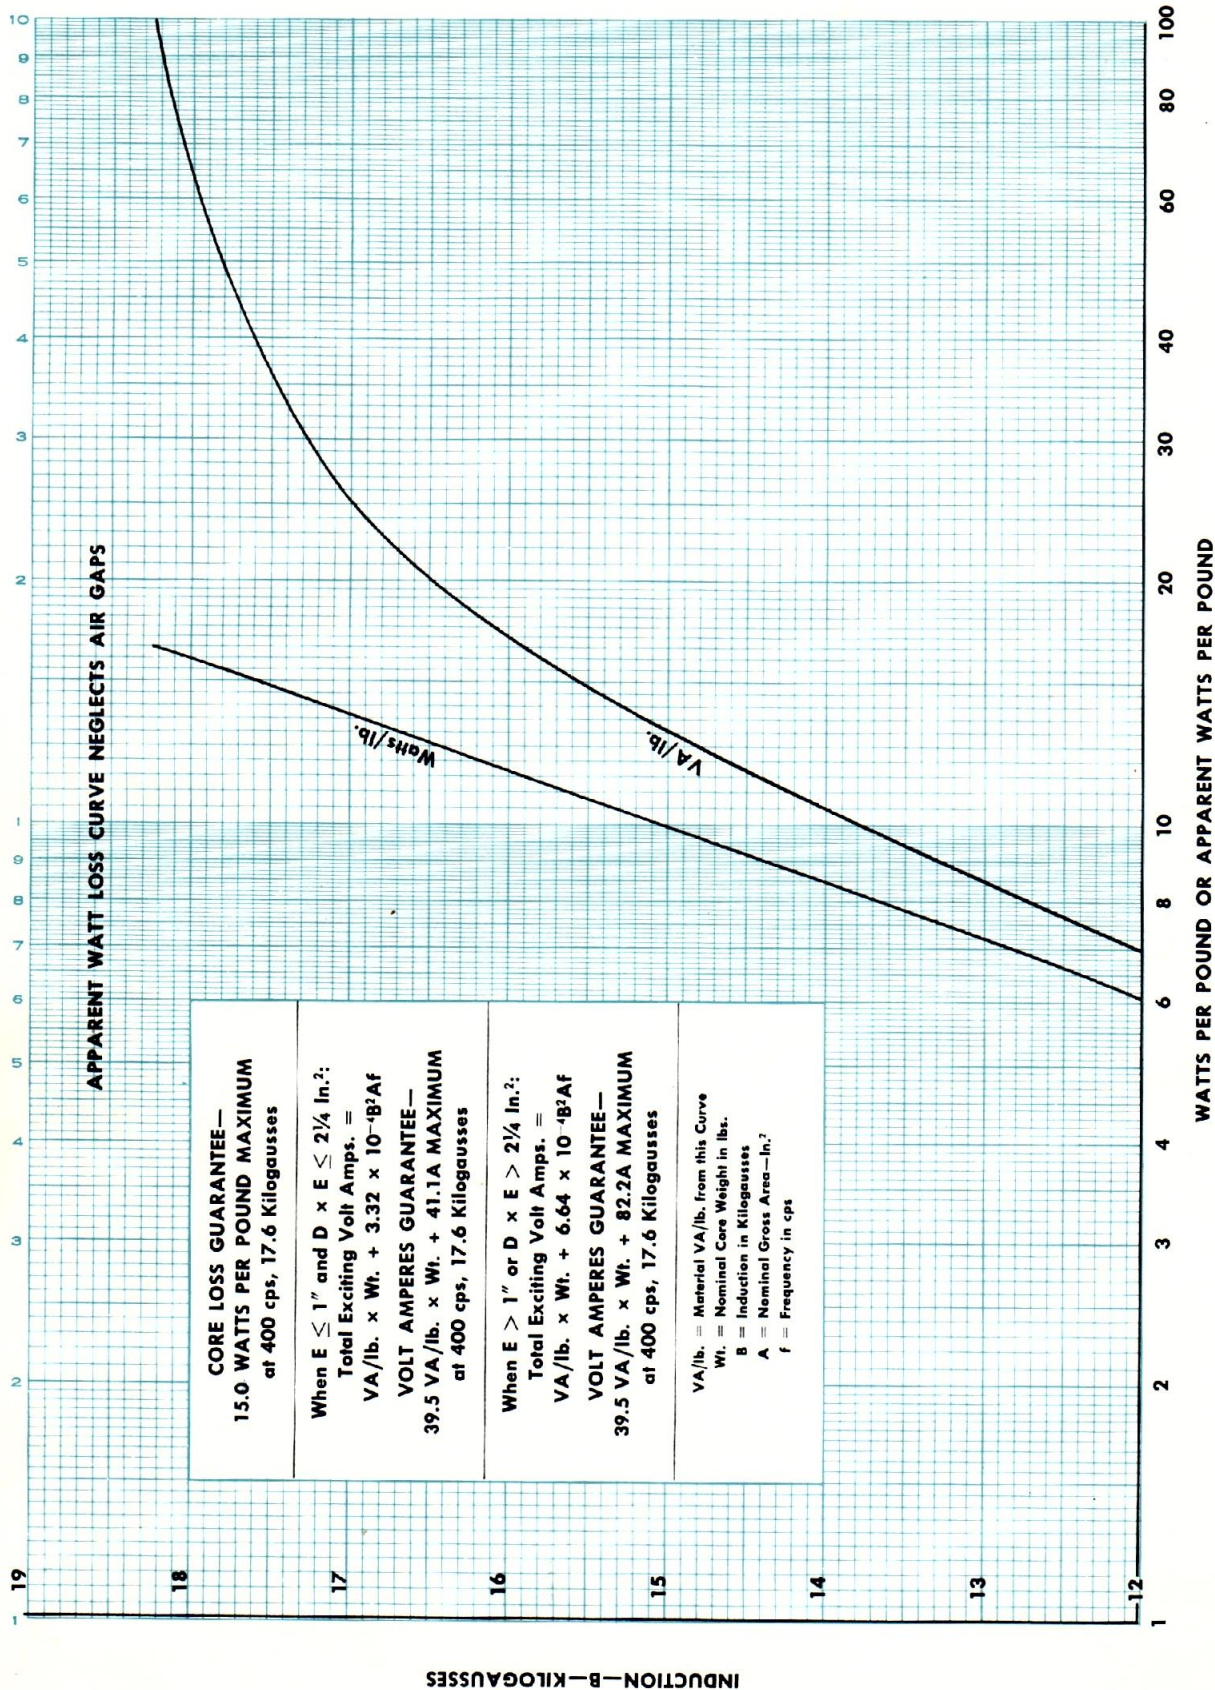


FIG. 9—DESIGN CURVES SHOWING MAXIMUM CORE LOSS AND APPARENT CORE LOSS AT 400 CPS FOR 4 MIL SILECTRON "C" CORES TYPE "AZ"

12 MIL SILETRON "C" CORES

In shell type transformers the power handling capacity in watts of a pair of cores for normal 60 cps conditions is approximated by the value shown in the last column of the part number tabulation. This column tabulates power handling capacity as denoted by 100 times the product of core cross-section and window area. For example, the AA-519 core, for which this factor is shown as 3080, is a very popular core for a 2.5 kva shell type distribution transformer.

The "AA" cores are used almost exclusively at power frequencies for transformers, filter chokes, reactors and magnetic amplifiers.

In transformer applications inductions as high as 18 kilogausses may be used without excessive core losses. However, exciting currents increase very rapidly above 15 kilogausses, and copper losses rather than core losses will usually be the limiting factor at higher inductions. Allowance for over-voltage characteristics must be made when establishing normal core operating inductions because of the sharper saturation characteristics of Siletron at high inductions.

Filter choke and reactor applications use Siletron cut cores because of their high normal and incremental permeabilities at inductions ranging up to 15 kilogausses. These permeability values are a function of core geometry, as well as of incremental flux change and dc magnetizing force. Reference to figure 12 will indicate the

effect of mean core length on normal permeability at 60 cps and 10 kilogausses. Reference to figure 23 will show the effect of other air gaps upon the value of normal permeability.

In magnetic amplifier applications the rectangularity of the hysteresis loop and the high saturation density of Siletron are of major interest. It is necessary in such applications for the core to saturate sharply at a definite value of induction; below this point it must have relatively high permeability. These characteristics are obtained in a Siletron cut core by virtue of the high degree of orientation of the material and by minimizing the effective air gap. Cores with short magnetic path lengths may require lapping to reduce the air gap further and thereby avoid excessive shearing over of the hysteresis loop. The effective air gap becomes less critical in a core with a long magnetic path length because of the smaller ratio of effective air gap length to total magnetic path length.

Twelve mil "C" cores meet the following electrical guarantees when tested at 60 cps and 15 kilogausses:

TYPE	MAXIMUM CORE LOSS W/lb.	MAXIMUM
		VOLT AMPERES —MATERIAL PLUS GAP ALLOWANCE
AA	0.9	$1.70 \times Wt. + 5.0 \times A^*$

*When gross area (A) exceeds $2\frac{1}{4}$ square inches, or build up (E) exceeds 1", or window width (F) is $1\frac{3}{8}$ " or more, or window length (G) is $4\frac{1}{2}$ " or more, use $10.0 \times A$ in place of $5.0 \times A$.



Arnold 12 mil "C" cores are manufactured to specifications that meet the requirements set forth in EIA Standard RS-217 for wound cut cores.



ARNOLD SILECTRON CORES

For Dimensional Tolerances, See Latest Supplement.

For ready identification, these cores are stamped with the type designation "AA," then tied with BROWN-RED string before plastic dipping.

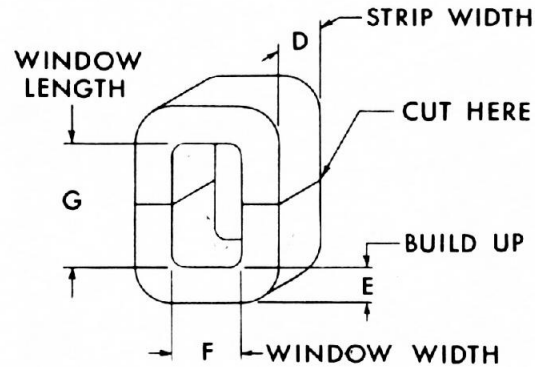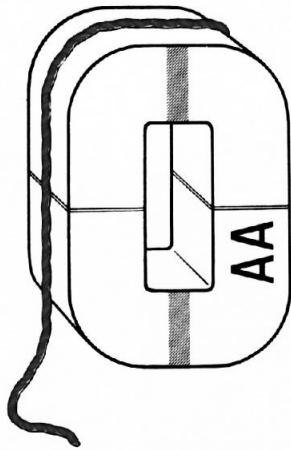

AEC Co. Part Number	Nominal Weight (lb.)	NOMINAL CORE DIMENSIONS				Gross Area (D×E)-in. ²	Window Area (F×G)-in. ²	Relative Power Handling Capacity (D×E×F×G ×100)-in. ⁴
		D	E	F	G			
*AA-1	.160	5/8	1/4	1/2	1-1/8	.156	.563	8.78
*AA-2	.200	3/4	1/4	1/2	1-1/8	.187	.563	10.5
AA-373	.246	3/4	9/32	7/16	1-3/8	.211	.602	12.7
*AA-4	.350	3/4	3/8	7/16	1-3/8	.277	.602	16.7
AA-279	.420	5/8	1/2	7/16	1-3/8	.313	.602	18.8
*AA-3	.510	1	3/8	1/2	1-9/16	.375	.781	29.3
*AA-5	.430	1	5/16	5/8	1-9/16	.312	.977	30.5
AA-87	.620	1	7/16	1/2	1-9/16	.437	.781	34.1
*AA-7	.620	1	3/8	5/8	1-15/16	.375	1.21	45.4
AA-376	.690	1	7/16	5/8	1-3/4	.438	1.09	47.7
*AA-81	.760	1	1/2	5/8	1-9/16	.500	.977	48.9
*AA-163	.740	1	7/16	5/8	1-15/16	.437	1.21	52.9
*AA-8	.760	1-1/4	3/8	5/8	1-15/16	.468	1.21	56.6
AA-358	.760	7/8	7/16	5/8	2-1/2	.383	1.56	59.7
AA-6	1.02	1	5/8	5/8	1-9/16	.625	.977	61.1
*AA-326	.880	3/4	9/16	5/8	2-1/2	.422	1.56	65.8
*AA-9	1.08	1-1/4	1/2	5/8	1-15/16	.625	1.21	75.6
AA-85	.680	1	3/8	1-3/16	1-3/4	.375	2.08	78.0
*AA-10	.890	1-1/4	3/8	3/4	2-5/16	.468	1.73	81.0
AA-314	1.39	1-3/8	5/8	5/8	1-9/16	.859	.977	83.9
*AA-32	1.44	1	3/4	5/8	1-15/16	.750	1.21	90.8
AA-346	1.16	1-1/2	7/16	11/16	2-1/16	.656	1.42	93.2
*AA-126	1.42	1-1/4	5/8	5/8	1-15/16	.781	1.21	94.5
AA-194	1.43	1-1/4	9/16	5/8	2-7/16	.703	1.52	107
AA-310	1.30	1	5/8	3/4	2-5/16	.625	1.73	108
*AA-392	1.10	7/8	9/16	15/16	2-1/2	.492	2.34	115
*AA-257	1.73	2	1/2	5/8	1-15/16	1.00	1.21	121
*AA-11	1.18	1-1/2	3/8	15/16	2-1/2	.562	2.34	132
*AA-138	1.36	1-1/4	1/2	15/16	2-1/2	.625	2.34	146
*AA-17	1.59	1	3/4	1-3/16	1-3/4	.750	2.08	156

* Preferred core sizes.

AEC Co. Part Number	Nominal Weight (lb.)	NOMINAL CORE DIMENSIONS				Gross Area (D×E)-in. ²	Window Area (F×G)-in. ²	Relative Power Handling Capacity (D×E×F×G ×100)-in. ⁴
		D	E	F	G			
AA-125	2.04	1-1/4	3/4	3/4	2-5/16	.938	1.73	162
*AA-28	1.96	1-1/2	5/8	3/4	2-5/16	.938	1.73	163
*AA-12	1.64	1-1/2	1/2	15/16	2-1/2	.750	2.34	176
*AA-36	2.45	1-1/2	3/4	3/4	2-5/16	1.13	1.73	195
AA-94	2.56	1-1/4	7/8	7/8	2-5/16	1.09	2.02	220
*AA-13	1.85	1-1/2	1/2	1	3	.750	3.00	225
AA-251	2.45	1-3/8	3/4	15/16	2-1/2	1.03	2.34	241
AA-127	3.22	2	3/4	3/4	2-1/4	1.50	1.69	254
*AA-49	2.67	1-1/2	3/4	15/16	2-1/2	1.13	2.34	264
*AA-14	2.49	2	1/2	1	3	1.00	3.00	300
AA-177	3.00	1-1/2	3/4	1	3	1.13	3.00	339
*AA-18	2.35	1-3/4	1/2	1-3/8	3	.875	4.13	361
AA-39	3.10	2-1/2	1/2	1	3	1.25	3.00	375
*AA-185	2.58	1-3/8	5/8	1-5/16	3-1/2	.859	4.59	394
AA-300	4.32	2	7/8	15/16	2-1/2	1.75	2.34	410
*AA-15	3.60	2	11/16	1	3	1.38	3.00	414
AA-268	3.86	1-3/4	13/16	1	3	1.42	3.00	426
*AA-48	4.00	2	3/4	1	3	1.50	3.00	450
*AA-111	4.31	1-1/2	1	1	3	1.50	3.00	450
AA-27	4.03	1-1/4	1-1/16	1-1/4	3	1.33	3.75	499
*AA-371	5.34	2	1	15/16	2-11/16	2.00	2.52	504
AA-130	4.84	2	7/8	1	3	1.75	3.00	525
*AA-214	3.84	1-5/8	13/16	1-3/8	3	1.32	4.13	545
AA-456	4.99	2-1/4	7/8	1-5/16	2-1/4	1.97	2.95	581
*AA-16	5.73	2	1	1	3	2.00	3.00	600
*AA-19	4.31	2	3/4	1-3/8	3	1.50	4.13	620
AA-390	4.55	1-3/4	7/8	1-3/8	3	1.53	4.13	632
AA-105	4.33	1-1/2	3/4	1-3/8	4-7/8	1.13	6.70	757
*AA-35	6.13	2	1	1-3/8	3	2.00	4.13	826
AA-332	6.44	2	1	1-3/16	3-1/2	2.00	4.16	832
*AA-53	6.28	2-1/4	7/8	1-5/16	3-1/2	1.97	4.59	904
*AA-54	7.55	2-1/2	1	1-3/16	3-1/8	2.50	3.71	928
AA-1176	7.03	2	1	1-1/4	4	2.00	5.00	1000
*AA-393	6.98	2-1/2	7/8	1-5/16	3-1/2	2.19	4.59	1010
*AA-119	7.64	2-1/2	1	1-3/8	3	2.50	4.13	1030
*AA-355	8.47	2-1/4	1-1/8	1-1/4	3-1/2	2.53	4.38	1110
*AA-266	7.91	2-1/4	1	1-3/8	3-7/8	2.25	5.33	1200
AA-106	7.61	2-1/4	1	1-5/8	3-3/8	2.25	5.48	1233
*AA-203	8.80	2-1/4	1-1/8	1-5/8	3-3/8	2.53	5.48	1390
AA-29	8.62	2-1/2	1	1-9/16	3-9/16	2.50	5.57	1392
AA-323	13.5	2-1/4	1-11/16	1-3/16	3-1/8	3.80	3.71	1410
AA-122	10.1	2-1/2	1	1-3/8	4-7/8	2.50	6.70	1676
AA-274	9.88	2-1/2	1-1/32	1-5/8	4-3/16	2.58	6.80	1750
AA-237	11.6	2-1/2	1-1/8	1-3/8	4-7/8	2.81	6.70	1883
AA-248	12.3	1-5/8	1-5/8	1-5/8	4-7/8	2.64	7.92	2091



* Preferred core sizes.



ARNOLD SILECTRON CORES

For Dimensional Tolerances, See Latest Supplement.

For ready identification, these cores are stamped with the type designation "AA."

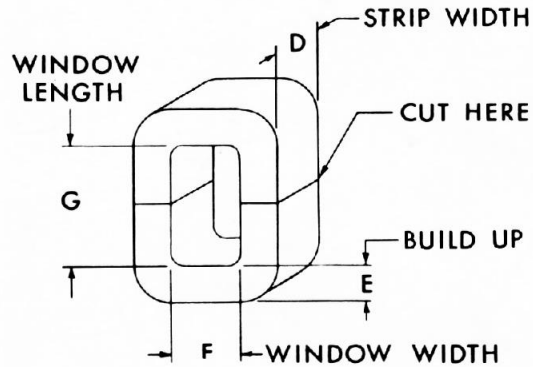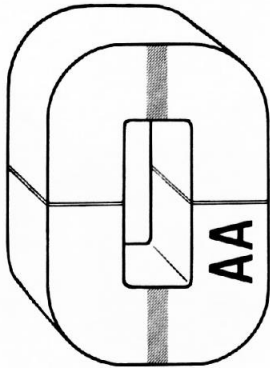

New AECo. Part Number	Nominal Weight (lbs.)	NOMINAL CORE DIMENSIONS				Gross Area (D×E)-in. ²	Window Area (F×G)-in. ²	Relative Power Handling Capacity (D×E×F×G ×100)-in. ⁴
		D	E	F	G			
*AA-514	12.1	3-3/8	1-1/8	1-3/8	3	3.80	4.13	1,570
AA-513	17.2	3-3/8	1-1/2	1-3/16	3-1/8	5.06	3.71	1,880
*AA-459	11.9	2-13/16	1-3/32	1-5/8	4-3/16	3.08	6.81	2,090
*AA-480	12.9	2-13/16	1-3/32	1-3/4	4-11/16	3.08	8.20	2,520
*AA-519	14.1	2-13/16	1-3/32	2	5	3.08	10.0	3,080
*AA-516	17.5	3-1/8	1-1/4	1-13/16	4-7/8	3.91	8.84	3,450
AA-515	19.0	3-3/8	1-5/16	1-13/16	4-3/8	4.43	7.93	3,510
AA-517	19.7	3-1/8	1-3/8	1-13/16	4-7/8	4.30	8.84	3,800
*AA-518	18.9	3-1/8	1-7/32	1-7/8	5-13/16	3.81	10.9	4,150
AA-522	21.7	2-1/2	1-23/32	2	5	4.30	10.0	4,300
AA-535	17.1	3	1-1/8	2-1/4	5-3/4	3.38	12.9	4,360
*AA-533	18.0	3-1/8	1-5/32	2-3/16	5-5/8	3.61	12.3	4,450
AA-520	23.2	4	1-1/4	2	5	5.00	10.0	5,000
*AA-523	23.4	3-3/8	1-3/8	2	5-7/16	4.64	10.9	5,050
*AA-521	27.6	4	1-7/16	2	5	5.75	10.0	5,080
AA-524	22.2	3-3/8	1-1/4	2-1/8	6-1/16	4.22	12.9	5,440
AA-2838	30.0	3-7/8	1-5/8	1-3/4	5	6.29	8.75	5,509
*AA-525	24.2	3-3/8	1-11/32	2-1/8	6-1/16	4.54	12.9	5,840
*AA-529	26.2	3-3/8	1-13/32	2-1/8	6-5/16	4.75	13.4	6,370
*AA-534	29.0	3-3/4	1-13/32	2-3/16	6-1/16	5.27	13.3	6,990
AA-2855	38.3	4-1/8	1-11/16	1-11/16	6-3/8	6.95	10.75	7,484
*AA-536	30.6	3-3/4	1-13/32	2-1/4	6-9/16	5.27	14.8	7,790
*AA-526	34.8	4	1-9/16	2-1/8	6-1/8	6.25	13.0	8,140
*AA-537	32.7	3-3/4	1-15/32	2-1/4	6-3/4	5.51	15.2	8,370
*AA-555	29.5	2-1/2	1-25/32	2-3/4	7-3/16	4.45	19.8	8,800

* Preferred core sizes.

9.11
9.08
10.35
15.61
17.67
16.32
17.40
18.79
19.74

New AECo. Part Number	Nominal Weight (lbs.)	NOMINAL CORE DIMENSIONS				Gross Area (D×E)-in. ²	Window Area (F×G)-in. ²	Relative Power Handling Capacity (D×E×F×G ×100)-in. ⁴
		D	E	F	G			
*AA-530	38.6	4	1-9/16	2-1/8	7-3/16	6.25	15.3	9,550
AA-2839	47.9	4-5/16	1-11/16	1-5/8	8-1/2	7.27	13.81	10,040
*AA-558	34.0	2-1/2	1-25/32	2-3/4	8-5/8	4.45	23.7	10,500
AA-547	35.3	3-1/2	1-1/2	2-1/2	8-1/16	5.25	20.2	10,600
*AA-559	33.2	2-1/2	1-13/16	2-3/4	8-5/8	4.53	23.7	10,700
AA-556	34.4	3-3/8	1-1/2	2-3/4	7-7/8	5.06	21.7	11,000
*AA-543	42.7	4	1-21/32	2-3/8	7-5/16	6.63	17.4	11,500
*AA-539	46.5	4	1-13/16	2-1/4	7-1/4	7.25	16.3	11,800
*AA-540	50.3	4	1-13/16	2-1/4	8-1/8	7.25	18.3	13,300
*AA-564	40.3	2-13/16	1-29/32	3-1/16	8-1/4	5.36	25.3	13,600
AA-532	50.6	4	1-9/16	2-1/8	11	6.25	23.4	14,600
AA-549	51.0	4	1-13/16	2-1/2	8-1/16	7.25	20.2	14,700
AA-2840	72.5	5-3/8	1-7/8	1-9/16	9-7/16	10.07	14.74	14,800
AA-544	59.8	4	2-3/16	2-3/8	7-5/16	8.75	17.4	15,200
*AA-548	53.7	4	1-29/32	2-1/2	8-1/16	7.63	20.2	15,400
*AA-566	45.1	2-13/16	1-31/32	3-1/16	9-3/8	5.54	28.7	15,900
AA-541	69.2	3-1/2	2-5/8	2-1/4	8-1/8	9.19	18.3	16,800
AA-546	64.2	4-1/4	2-3/16	2-1/2	7-5/16	9.30	18.3	17,000
AA-560	55.5	5	1-11/16	2-13/16	7-3/16	8.44	20.2	17,100
*AA-571	49.1	2-13/16	2-3/32	3-1/8	9-5/8	5.89	30.1	17,700
*AA-570	54.0	3-1/8	2-1/16	3-1/8	9-5/8	6.45	30.1	19,400
AA-557	60.2	5	1-21/32	2-3/4	8-5/8	8.28	23.7	19,600
AA-572	54.3	3-1/8	2-1/16	3-5/16	9-5/8	6.45	31.9	20,600
*AA-2841	82.6	6-3/8	2-1/16	2-3/8	6-5/8	13.14	15.73	20,600
*AA-561	58.9	3-1/8	2-7/32	3	10	6.93	30.0	20,800
AA-551	66.6	4	1-29/32	2-1/2	11-1/4	7.62	28.1	21,400
AA-550	80.9	4	2-11/16	2-1/2	8-1/16	10.8	20.2	21,800
AA-562	64.0	3-3/8	2-7/32	3	10	7.49	30.0	22,500
AA-573	62.2	3-1/8	2-5/16	3-5/16	9-5/8	7.23	31.9	23,100
AA-552	75.0	4-1/2	1-29/32	2-1/2	11-1/4	8.58	28.1	24,100
AA-553	81.1	4	2-3/16	2-1/2	11-1/4	8.75	28.1	24,600
AA-565	79.5	5-5/8	1-29/32	3-1/16	8-1/4	10.7	25.3	27,100
AA-577	62.4	3-1/4	2-1/8	4	10	6.91	40.0	27,600
AA-563	91.5	3-1/8	3-1/8	3	10	9.77	30.0	29,300
AA-554	98.5	4	2-11/16	2-1/2	11-1/4	10.8	28.1	30,300
AA-567	86.0	5-5/8	1-29/32	3-1/16	9-3/8	10.7	28.7	30,700
AA-2842	115.3	6-3/4	2-1/8	2-1/8	10-1/8	14.34	41.91	30,800
AA-578	68.0	2	3	4	13	6.00	52.0	31,200
AA-574	82.5	5	2-1/32	3-3/8	9-1/16	10.2	30.6	31,300
AA-568	92.0	5-5/8	1-31/32	3-1/8	9-5/8	11.1	30.1	33,400
AA-579	83.6	3-3/4	2-1/4	4-1/2	11	8.44	49.5	41,800
AA-2843	137.8	6-3/4	2-1/8	2-1/4	13	14.34	29.25	41,900
AA-576	97.2	4-1/2	2-1/4	3-3/4	11-5/8	10.1	43.6	44,000

* Preferred core sizes.

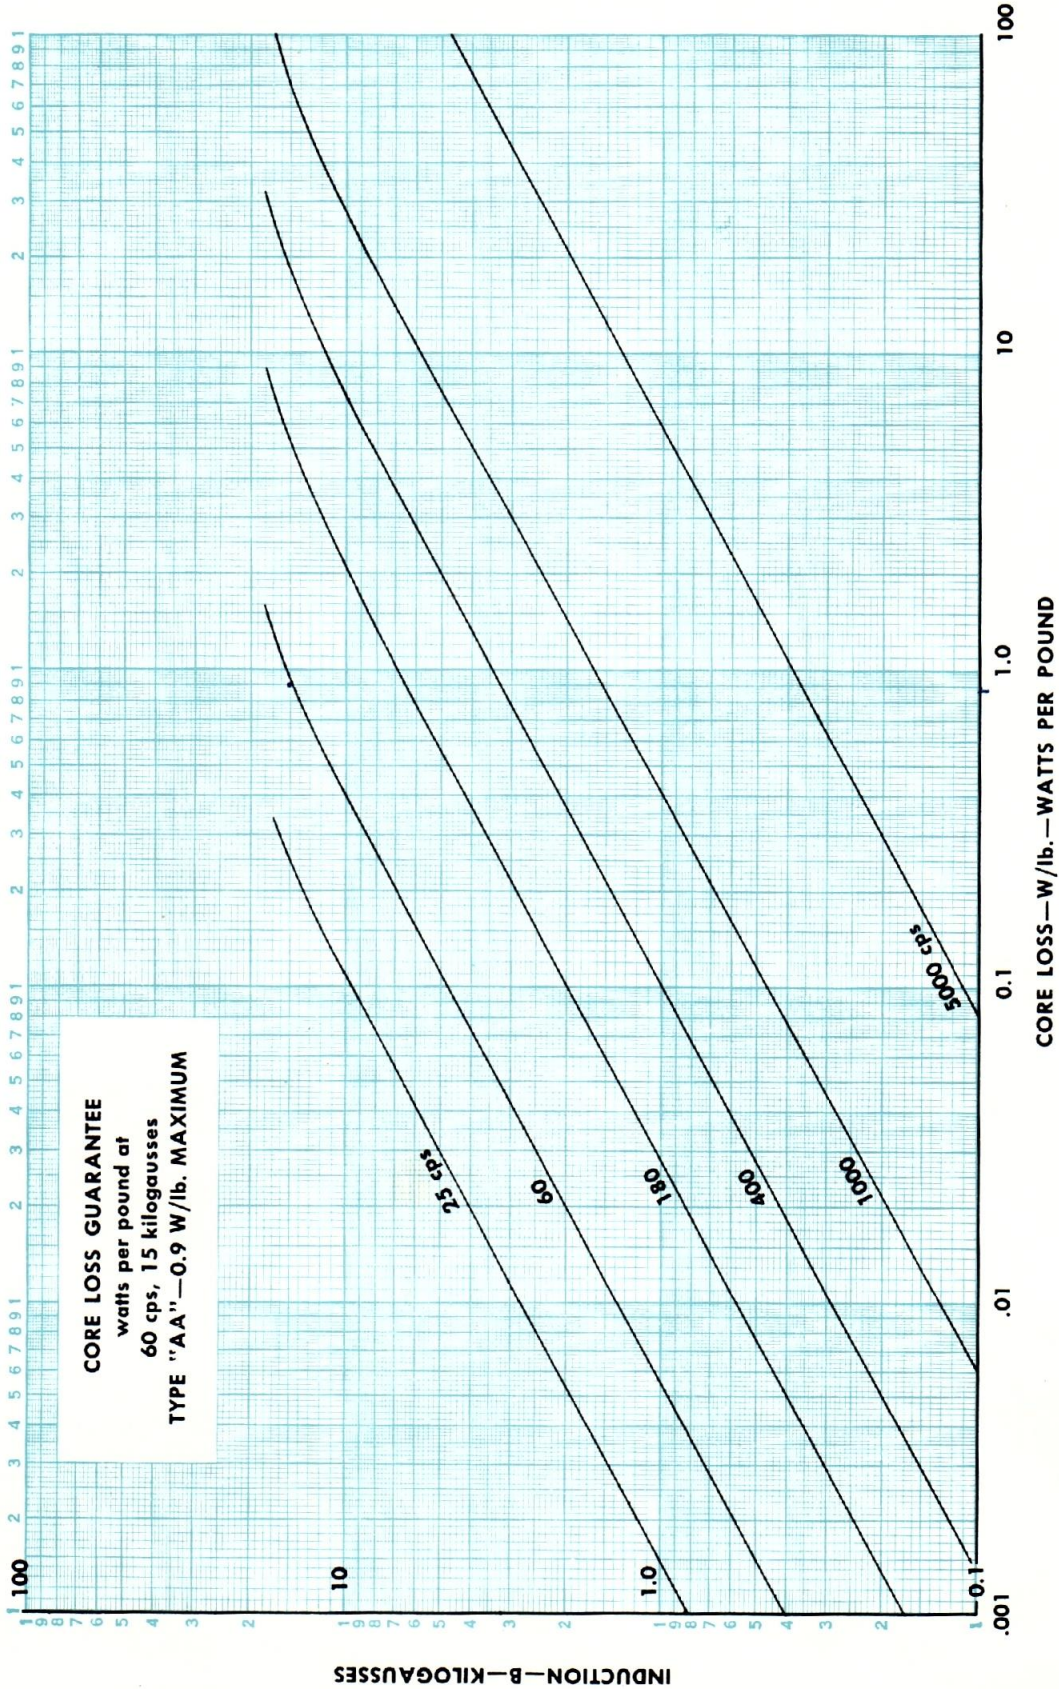


FIG. 10—DESIGN CURVES SHOWING MAXIMUM CORE LOSS FOR 12 MIL SILELECTRON "C" CORES TYPES "AA"

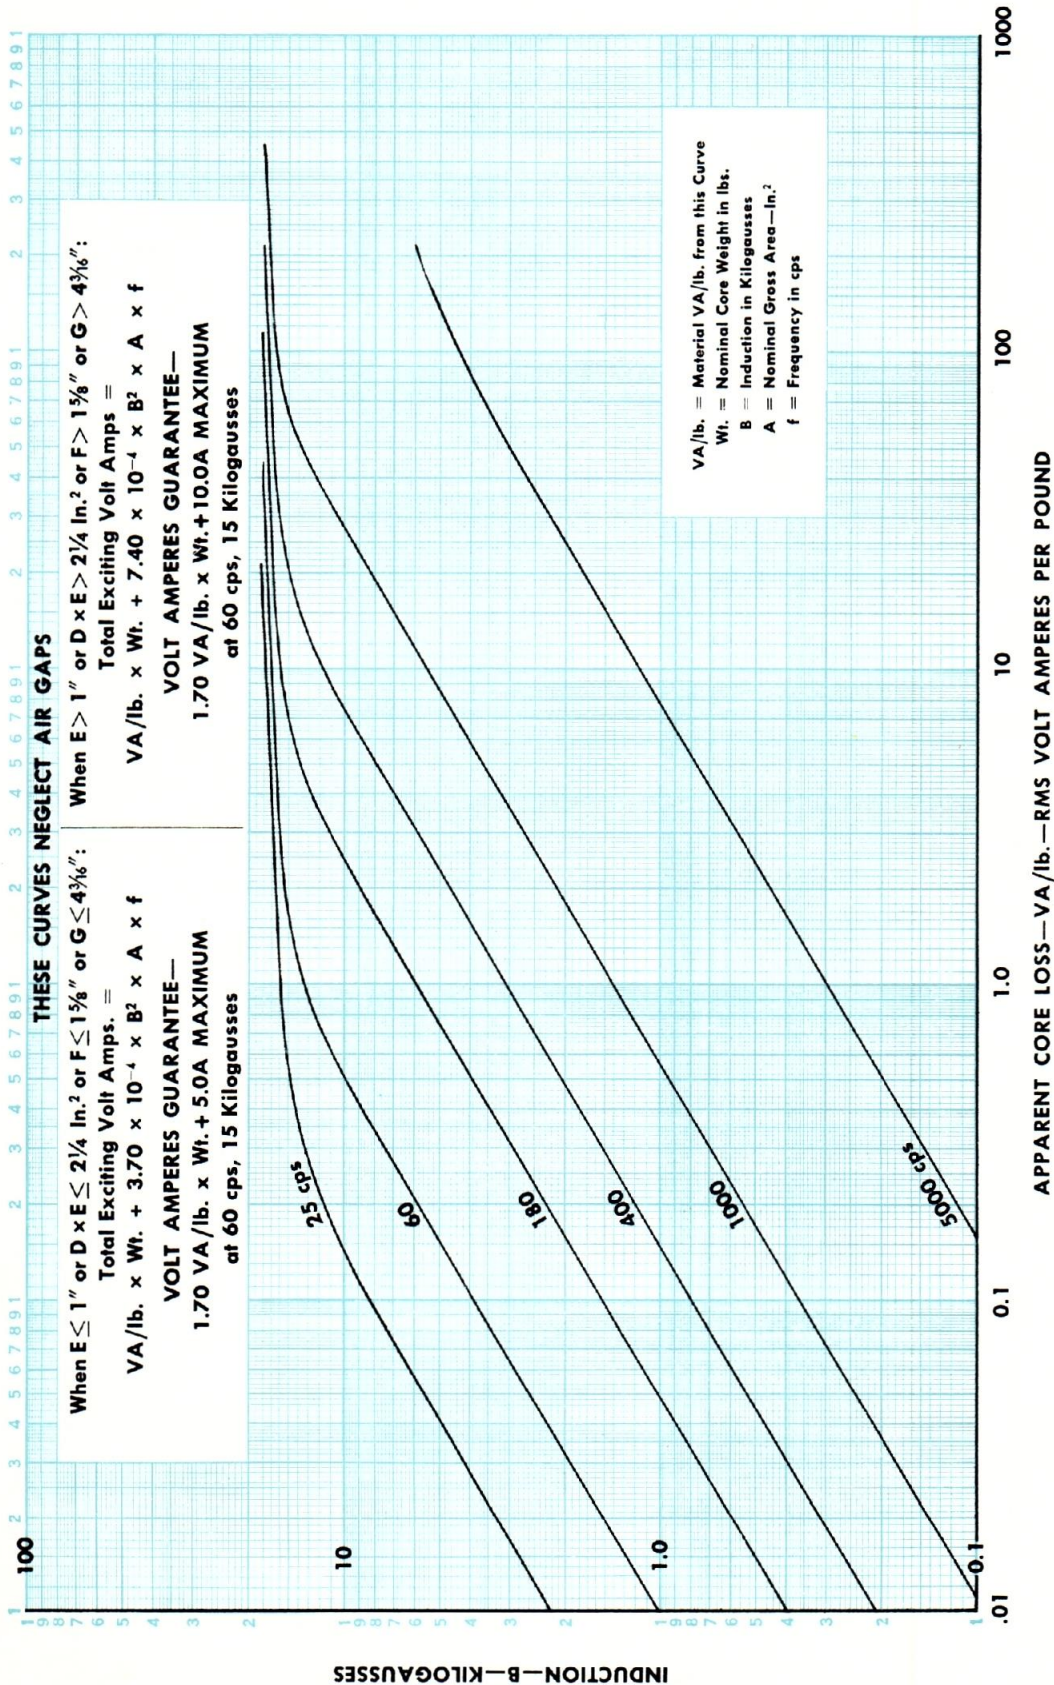


FIG. 11—DESIGN CURVES SHOWING MAXIMUM APPARENT CORE LOSS FOR 12 MIL SILECTRON "C" CORES TYPE "AA"

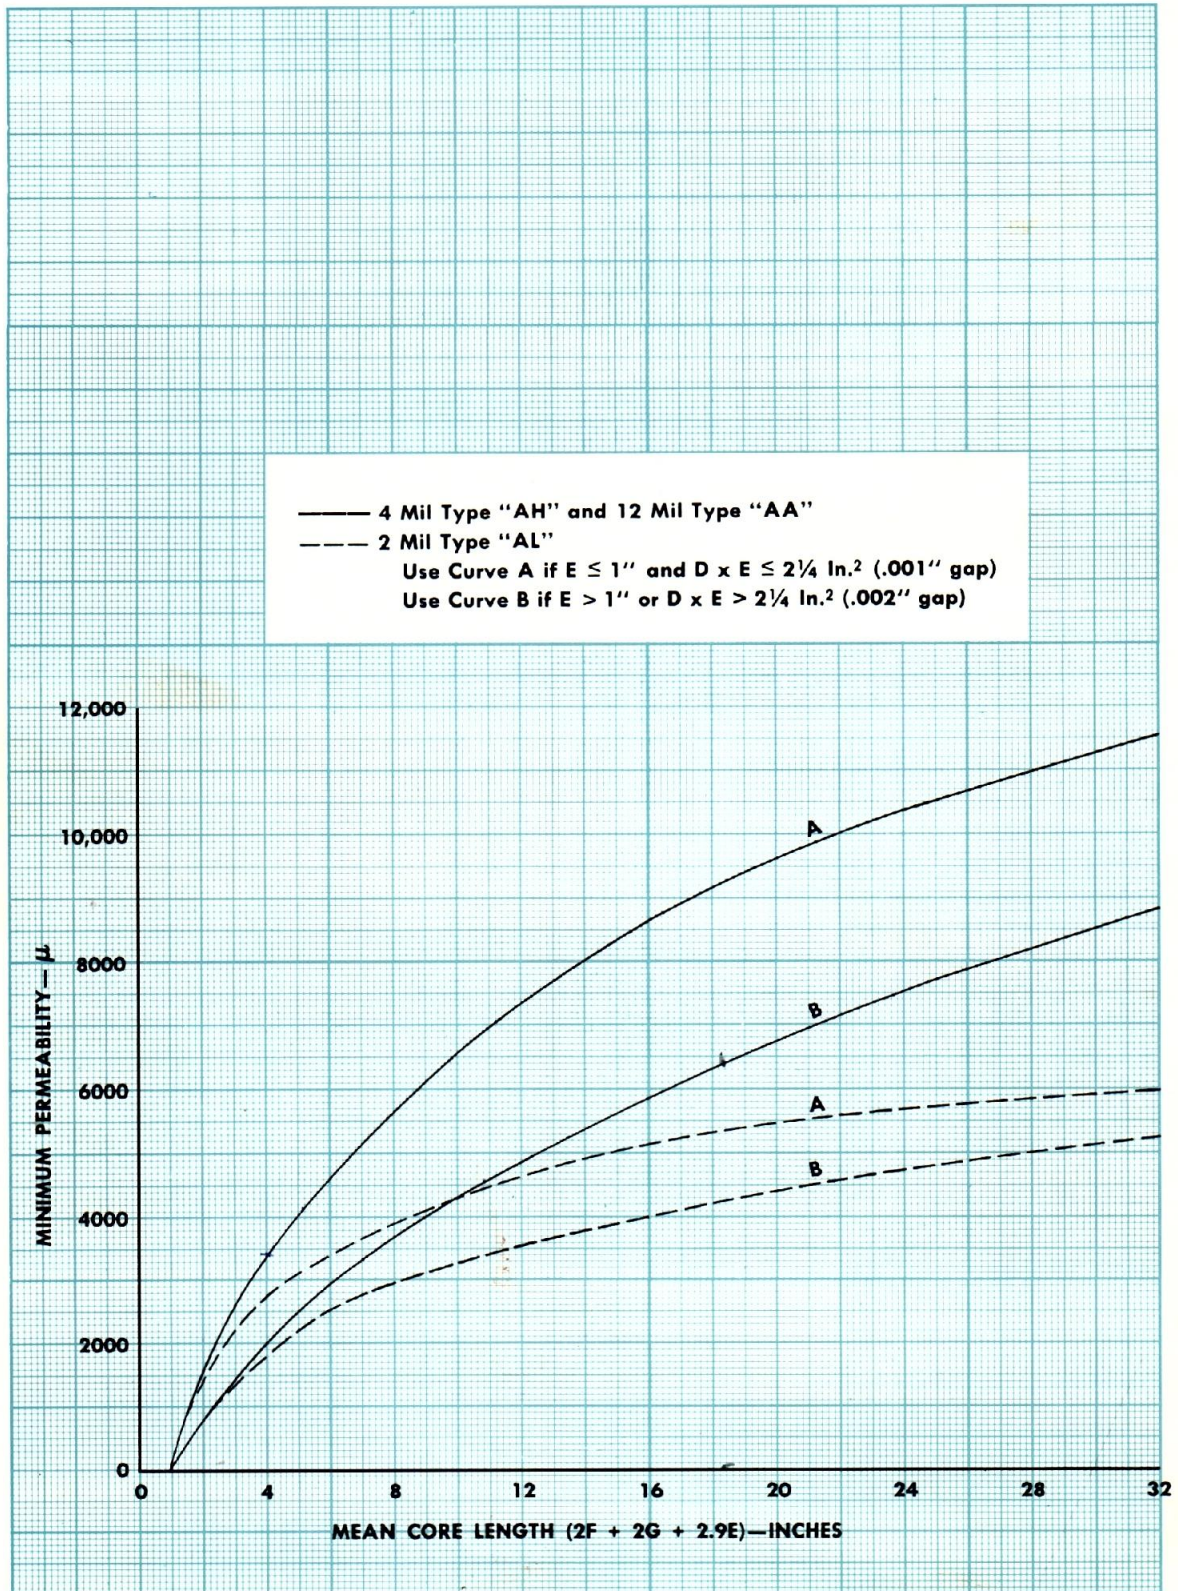



FIG. 12—MINIMUM DESIGN PERMEABILITY FOR SILECTRON "C" CORES AT 60 CPS, 10 KILOGAUSSSES

12 MIL AND 4 MIL SILECTRON "E" CORES

Three phase "E" cores are made in 12 or 4 mil Silectron in a wide range of core sizes. The 4 mil cores may be made in either the ATH or ATZ types. "E" cores permit construction of very compact three phase transformers which are smaller in size and weight than similar designs using three single phase cores.

Three phase "E" cores may be operated at the same flux densities as single phase "C" cores of the same strip thickness. Exciting current requirements also are similar to those for "C" cores, with an air gap allowance required for each leg. The core losses, however, will be greater because of third harmonic flux. Therefore, the maximum core loss limit will be 20% greater than for a single phase core.

"E" cores are tested with three phase delta connected excitation. Under this condition they will meet the following guarantees for total core loss and excitation:

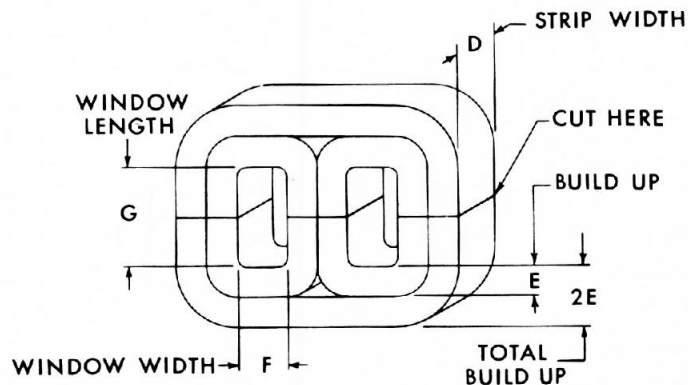

TYPE	FREQUENCY CPS	INDUCTION KILOGAUSSSES	MAXIMUM CORE LOSS W/lb.	MAXIMUM VOLT AMPERES PER LEG—MATERIAL PLUS GAP ALLOWANCE
ATA	60	15	1.08	$1.75 \times \text{Wt.} + 5.0 \times \text{A}^*$
ATH	400	15	12.0	$13.1 \times \text{Wt.} + 29.9 \times \text{A}^{**}$
ATZ	400	17.6	18.0	$39.5 \times \text{Wt.} + 41.1 \times \text{A}^{***}$

*When gross area (A) exceeds $2\frac{1}{4}$ square inches, or build up (2E) exceeds 1", or window width (F) is $1\frac{1}{8}$ " or more, or window length (G) is $4\frac{1}{4}$ " or more, use $10.0 \times \text{A}$ in place of $5.0 \times \text{A}$.

**When gross area (A) exceeds $2\frac{1}{4}$ square inches, or build up (2E) exceeds 1", or window width (F) is $1\frac{1}{8}$ " or more, or window length (G) is $4\frac{1}{4}$ " or more, use $59.8 \times \text{A}$ in place of $29.9 \times \text{A}$.

***When gross area (A) exceeds $2\frac{1}{4}$ square inches, or build up (2E) exceeds 1", or window width (F) is $1\frac{1}{8}$ " or more, or window length (G) is $4\frac{1}{4}$ " or more, use $82.2 \times \text{A}$ in place of $41.1 \times \text{A}$.

AECo. Part Number	Nominal Weight (lb.)	NOMINAL CORE DIMENSIONS					Gross Area (D×2E)—in. ²	Window Area 2(F×G)—in. ²	Relative Power Handling Capacity D×2E×F×G×75
		D	E	2E	F	G			
ATA-2	1.22	3/8	3/8	3/4	1-1/4	2-1/2	.281	6.25	66
ATA-7	2.30	1-1/8	1/4	1/2	1-1/4	2-5/8	.563	6.56	139
ATA-5	6.96	1-1/2	1/2	1	1-1/4	2-1/2	1.50	6.25	352
ATA-4	9.48	1-3/8	5/8	1-1/4	1-3/8	3	1.72	8.25	533
*ATA-1	9.03	1-3/4	1/2	1	1-3/8	3	1.75	8.25	541
ATA-1097	14.3	3	1/2	1	1	3	3.00	6.00	676
ATA-3	10.2	1-3/4	1/2	1	1-3/8	3-7/8	1.75	10.7	702
ATA-1412	10.9	1-3/4	1/2	1	1-3/4	3-7/8	1.75	13.6	892
*ATA-6	24.0	2-1/2	3/4	1-1/2	1-3/8	3-7/8	3.75	10.7	1503
*ATA-1193	23.5	2-5/8	9/16	1-1/8	2	5-25/32	2.95	23.1	2555
*ATA-1464	32.5	2-1/2	3/4	1-1/2	3	4-7/16	3.75	26.6	3741
ATA-1242	63.9	3	1-1/16	2-1/8	3	5	6.38	30.0	7145
ATA-1300	80.4	2	1-3/8	2-3/4	2-1/8	11	5.50	46.8	9656
ATA-1399	97.9	3-1/2	1-3/16	2-3/8	3-5/16	6-1/2	8.31	43.1	13423
ATA-1504	81.8	2-1/2	1	2	4	12	5.00	96.0	18013

* Preferred core sizes.



ARNOLD SILECTRON CORES

AEC Co. Part Number	Nominal Weight (lb.)	NOMINAL CORE DIMENSIONS					Gross Area (D×2E)-in. ²	Window Area 2(F×G)-in. ²	Relative Power Handling Capacity D×2E×F×G×75
		D	E	2E	F	G			
ATH-43	0.25	3/8	3/16	3/8	1/2	1-1/8	.141	1.125	6.06
*ATH-69	0.31	1/2	3/16	3/8	7/16	1	.188	.875	6.19
*ATH-53	0.32	3/4	1/8	1/4	7/16	1	.188	.875	6.19
*ATH-25	0.44	1/2	3/16	3/8	5/8	1-5/8	.188	2.032	14.33
*ATH-55	0.59	5/8	3/16	3/8	3/4	1-3/16	.234	1.781	15.63
ATH-83	0.75	3/4	1/4	1/2	1/2	1-1/8	.375	1.125	15.80
*ATH-56	0.99	3/4	1/4	1/2	5/8	1-9/16	.375	1.953	27.45
ATH-89	0.72	1/2	1/4	1/2	3/4	2	.250	3.000	28.14
*ATH-78	1.15	1	1/4	1/2	1/2	1-9/16	.500	1.563	29.31
*ATH-87	0.96	3/4	1/4	1/2	11/16	1-5/8	.375	2.234	31.43
ATH-67	0.93	5/8	1/4	1/2	3/4	2	.313	3.000	35.20
*ATH-66	1.06	7/8	1/4	1/2	11/16	1-5/8	.438	2.234	36.67
*ATH-65	1.28	1	1/4	1/2	11/16	1-5/8	.500	2.234	42.00
*ATH-31	1.53	3/4	3/8	3/4	13/16	1-1/4	.563	2.031	42.74
*ATH-90	1.45	1	1/4	1/2	3/4	2	.500	3.000	56.29
ATH-80	2.14	1	3/8	3/4	11/16	1-5/8	.750	2.234	62.78
ATH-47	2.05	1-1/8	5/16	5/8	5/8	1-15/16	.703	2.422	63.65
*ATH-30	2.15	1-1/4	5/16	5/8	5/8	1-15/16	.781	2.422	71.01
*ATH-58	2.26	1-1/4	5/16	5/8	11/16	2-1/16	.781	2.836	82.70
*ATH-61	2.36	1-1/4	5/16	5/8	7/8	1-13/16	.781	3.172	93.09
*ATH-95	2.47	1	3/8	3/4	1	1-3/4	.750	3.500	98.72
ATH-94	2.63	1	3/8	3/4	1-1/4	1-3/4	.750	4.375	122.97
*ATH-71	2.96	1-1/8	3/8	3/4	7/8	2-1/4	.844	3.938	124.70
ATH-85	2.80	1	3/8	3/4	1	2-3/8	.750	4.750	133.36
*ATH-70	3.78	1-1/4	7/16	7/8	15/16	1-7/8	1.09	3.516	143.76
*ATH-91	3.33	7/8	7/16	7/8	1	3	.766	6.000	172.33
*ATH-35	3.05	1	3/8	3/4	1-1/4	2-1/2	.750	6.250	175.80
*ATH-4	3.80	1-1/4	3/8	3/4	1-1/4	2-1/2	.938	6.250	219.53
*ATH-92	4.51	1	1/2	1	1	3	1.00	6.000	225.16
*ATH-2	5.93	1-1/2	1/2	1	1	2-1/4	1.50	4.500	253.30
ATH-64	4.58	1-1/2	3/8	3/4	1-1/4	2-1/2	1.13	6.250	264.56
ATH-72	4.94	1-1/8	1/2	1	1-1/4	2-1/2	1.13	6.250	264.56
ATH-45	5.70	1-1/8	9/16	1-1/8	1-1/2	2	1.27	6.000	285.78
*ATH-79	5.34	1-3/4	3/8	3/4	1-1/4	2-1/2	1.313	6.250	307.86
ATH-73	4.95	1-1/4	3/8	3/4	1-1/8	4-1/16	.938	9.140	321.29
ATH-1084	10.5	2	5/8	1-1/4	7/8	2-5/16	2.500	4.046	378.87
ATH-82	5.30	1	1/2	1	1-5/8	3-3/8	1.00	10.969	412.65
*ATH-68	9.05	2	1/2	1	1	3	2.00	6.000	450.32
ATH-1168	9.80	1-1/2	5/8	1-1/4	1-1/4	3-3/16	1.875	7.969	558.57
ATH-86	11.1	2	1/2	1	1-3/8	3-7/8	2.00	10.656	796.72
*ATH-75	10.7	1-5/8	1/2	1	1-1/2	5-1/16	1.63	15.188	930.95
ATH-1202	14.3	1-3/4	5/8	1-1/4	2-5/8	3-1/8	2.188	16.406	1346.63
ATH-1057	22.2	1-3/4	7/8	1-3/4	1-3/4	4-3/8	3.063	15.313	1757.98
ATH-1199	32.4	2	3/4	1-1/2	3-1/2	7-1/4	3.000	50.750	5715.60

* Preferred core sizes.

TECHNICAL INFORMATION ON UNCUT CORES

Tape wound toroids of Silectron are available in many sizes, shapes and gages. The toroidal or gapless construction utilizes to best advantage the high permeability and low loss characteristics of oriented silicon steel. These cores have been made in round, oval, tubular, rectangular, "D" and other shapes for a large variety of applications. The range of core sizes possible is virtually unlimited, varying from as little as a few grams to as large as several thousand pounds.

Silectron toroids may be supplied uncased, either with or without varnish impregnation, or with various types of cases as required by the core application. All uncut Silectron cores are designated by a basic four or five digit number preceded by the letter "T," which specifies the tape core size. This is preceded by a number indicating the type of core case according to the following table. A letter designation is used as a suffix to indicate the tape material, followed by a number denoting the material thickness in mils. The letter suffix "V" is used if the core is impregnated.

CORE CASE DESIGNATION

NUMBER PREFIX	CASE TYPE
None	Not cased
1	Aluminum (grease type)
2	Aluminum (oil type)
3	Nylon (grease type)
4	Nylon (oil type)
5	Phenolic (Machined — grease type)
6	Aluminum, insulated and hermetically sealed

A T4180 toroidal core size supplied in a nylon grease-type case of four mil Silectron, not impregnated, would be designated as cased core part number 3T4180-L4. This same core, without a core case and impregnated, would be known as part number T4180-L4V.

Toroids are produced in 12, 4, 2 and 1 mil thicknesses in L-Silectron material. Only the 4 mil thickness is available in the Z type Silectron.

The common applications for uncut Silectron toroids include current, potential and low leakage toroidal transformers, magnetic amplifiers and saturable reactors and magnetic shields.

Current transformers and similar applications ordinarily utilize either 12 mil or 4 mil unimpregnated L-Silectron toroids because of the high maximum permeability and low core loss of this material at inductions up to 12 or 15 kilogausses. These cores are used in the varnish impregnated form where greater mechanical rigidity is required, such as for winding with heavy wire, but where a reduction in permeability and an increase in core loss of the order of 25% can be tolerated. Where the best obtainable core properties are required, an unimpregnated but cased core is recommended.

Magnetic amplifier and saturable reactor applications usually require 12 or 4 mil L-Silectron or 4 mil Z-Silectron. The 12 mil material is usually preferred at 60 cps, whereas the 4 mil is preferred at 400 to 1,000 cps. The Z type Silectron has a more rectangular hysteresis loop and better high density characteristics than the L-Silectron. At higher frequencies the 2 or 1 mil material would be required. It should be remembered that both the hysteresis loop rectangularity, and coercive force of oriented Silicon steel depreciates as the material thickness is reduced below 4 mils. Varnish impregnation of the core also reduces the rectangularity of the hysteresis loop. These effects are illustrated by the dc hysteresis loops of Figures 13 through 21.

Transformers and saturable reactors which must operate at very high temperatures can be made with unimpregnated and cased Silectron toroids. In these applications cases from such non-magnetic materials as aluminum, stainless steel, glass or ceramic may be required to withstand the temperatures involved.

Impregnated and cut toroids with two or more gaps may be provided where the advantage of a gapped toroid is desired, such as for low frequency filters. This construction permits a gapped cut core which can be banded for ease of assembly. Cut cores to fit standard toroidal core cases can readily be provided.

Impregnated Silectron toroids will, in general, meet the same guarantees as the Silectron cut cores, but without the additional volt-ampere requirement allowed for the gap. Unimpregnated and cased Silectron toroids will generally average about 80% of the core loss and exciting volt-ampere limits of the impregnated toroids. This percentage, however, will vary with the material thickness and core size and shape. If specific guarantees are required, they should be referred to The Arnold Engineering Company for evaluation.


In addition to the requirements mentioned above, most Silectron toroids are checked for maximum normal permeability at 60 cps, 10 KB. They may also be checked for permeability at 200 gauss and 60 cps if a low density permeability test is desired. Unimpregnated Silectron toroids with superior low density or high density permeability may be obtained in 12, 4, 2 and 1 mil thicknesses on special order. Specific test limits for these permeabilities have not yet been established.

Additional tests involving various dynamic hysteresis loop parameters of the Silectron core may also be made, as required. Measurement of such parameters may permit grading and matching of cores for magnetic amplifiers and similar applications.



ARNOLD SILECTRON CORES

For Dimensional Tolerances, See Latest Supplement.

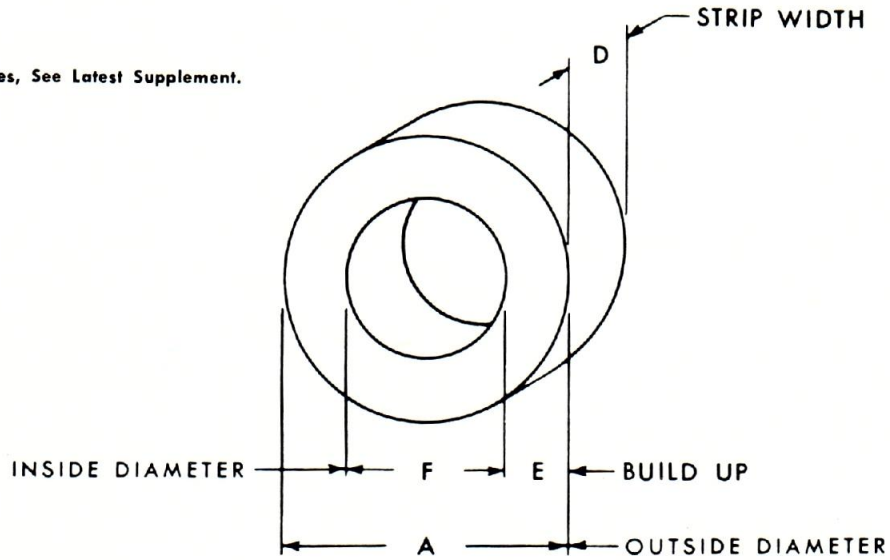

AECO. Core Size Designation	Gross Core Volume (in. ³)**	NOMINAL CORE DIMENSIONS				Gross Area (D×E)-in. ²	Window Area $(\frac{\pi F^2}{4})$ -in. ²	Relative Power Handling Capacity $[D \times E \times (\frac{\pi F^2}{4}) \times 100]$ -in. ⁴
		D	E	F	A			
*T5340	.031	1/8	1/8	1/2	3/4	.016	.196	.314
*T5515	.038	1/8	1/8	.650	.900	.016	.332	.531
*T6592	.061	1/4	1/8	1/2	3/4	.031	.196	.608
T8233	.043	1/8	1/8	3/4	1	.016	.442	.707
*T4168	.055	1/8	1/8	1	1-1/4	.016	.785	1.26
*T5651	.120	1/4	3/16	5/8	1	.047	.307	1.44
*T5504	.104	3/16	3/16	3/4	1-1/8	.035	.442	1.55
T6600	.295	1/2	1/4	1/2	1	.125	.196	2.45
*T6180	.265	3/8	1/4	.650	1.15	.094	.332	3.12
*T4635	.175	1/4	3/16	1	1-3/8	.047	.785	3.69
T5759	.497	3/8	3/8	3/4	1-1/2	.141	.442	6.21
*T5233	.368	3/8	1/4	1	1-1/2	.094	.785	7.38
*T5387	.295	1/4	1/4	1-1/4	1-3/4	.063	1.23	7.75
T6351	.319	1/4	1/4	1-3/8	1-7/8	.063	1.49	9.39
*T4179	.267	1/4	3/16	1-5/8	2	.047	2.07	9.75
*T5762	.785	1	1/4	3/4	1-1/4	.250	.442	11.1
*T5778	.540	1/2	1/4	1-1/8	1-5/8	.125	.994	12.4
T6272	1.10	3/4	3/8	7/8	1-5/8	.281	.601	16.9
T5772	.718	3/8	3/8	1-1/4	2	.141	1.23	17.3
T7874	1.01	5/8	3/8	1	1-3/4	.234	.785	18.4
T7998	1.18	1/2	1/2	1	2	.250	.785	19.6
T8234	.773	3/8	3/8	1-3/8	2-1/8	.141	1.49	20.9
T5924	1.48	3/4	7/16	1	1-7/8	.329	.785	25.8
*T7189	1.18	1	1/4	1-1/4	1-3/4	.250	1.23	30.8
*T4178	.884	1/2	1/4	2	2-1/2	.125	3.14	39.3
*T5320	1.57	1/2	1/2	1-1/2	2-1/2	.250	1.77	44.1
*T4180	1.08	1/2	1/4	2-1/2	3	.125	4.91	61.4
T7808	2.50	1/2	11/16	1-5/8	3	.344	2.07	71.3
T5552	1.77	1	1/4	2	2-1/2	.250	3.14	78.5
T7792	3.14	1	1/2	1-1/2	2-1/2	.500	1.77	88.4

* Standard molded core cases available for these core sizes. Special cases may be made for all other sizes.

** Nominal core weight in pounds for various tape thicknesses is computed by multiplying the gross core volume by the following factors:
 1 mil.229 2 mil.246 4 mil.248 12 mil.262

AEC Co. Core Size Designation	Gross Core Volume (in. ³)**	NOMINAL CORE DIMENSIONS				Gross Area (D×E)-in. ²	Window Area $(\frac{\pi F^2}{4})$ -in. ²	Relative Power Handling Capacity $[D \times E \times (\frac{\pi F^2}{4}) \times 100]$ -in. ⁴
		D	E	F	A			
T7519	2.45	5/8	1/2	2	3	.313	3.14	98.3
T6366	4.17	1	5/8	1-1/2	2-3/4	.625	1.77	110
T7875	2.95	3/4	1/2	2	3	.375	3.14	118
*T6100	2.36	1/2	1/2	2-1/2	3-1/2	.250	4.91	123
T6211	5.30	1	3/4	1-1/2	3	.750	1.77	133
T8027	3.93	1	1/2	2	3	.500	3.14	157
T6284	5.89	1	3/4	1-3/4	3-1/4	.750	2.41	180
T8235	4.12	7/8	1/2	2-1/2	3-1/2	.438	4.91	215
*T5468	4.71	1	1/2	2-1/2	3-1/2	.500	4.91	245
T9033	3.53	1/2	1/2	4	5	.250	12.6	314
T5953	9.72	1-1/2	3/4	2	3-1/2	1.13	3.14	354
*T6464	11.5	1-1/8	1	2-1/4	4-1/4	1.13	3.98	447
*T5690	9.20	1-1/2	5/8	2-1/2	3-3/4	.938	4.91	460
T8022	6.28	1	1/2	3-1/2	4-1/2	.500	9.62	481
T5575	4.32	1/2	1/2	5	6	.250	19.6	490
T6139	12.9	1-1/2	7/8	2-1/4	4	1.31	3.98	522
T5579	7.06	1	1/2	4	5	.500	12.6	630
*T6379	12.6	1	1	3	5	1.00	7.07	707
*T5737	11.4	1-1/2	5/8	3-1/4	4-1/2	.938	8.30	779
*T5581	13.2	1-1/2	3/4	3	4-1/2	1.13	7.07	795
T6234	14.1	1	1	3-1/2	5-1/2	1.00	9.62	962
T6865	20.9	1-1/4	1-1/4	3	5-1/2	1.56	7.07	1100
T8888	29.4	2	1-1/4	2-1/2	5	2.50	4.91	1230
T6119	18.0	1-1/2	7/8	3-1/2	5-1/4	1.31	9.62	1260
*T5582	26.6	1-3/8	1-3/8	3.10	5.85	1.89	7.55	1430
T6035	16.4	1-7/8	9/16	4-3/8	5-1/2	1.05	15.0	1575
T6348	35.6	2	1-3/8	2-3/4	5-1/2	2.75	5.94	1630
T5477	18.0	1-7/8	9/16	4-7/8	6	1.05	18.7	1960
T7683	20.1	2	5/8	4-1/2	5-3/4	1.25	15.9	1990
T6320	50.2	2-1/4	1-5/8	2-3/4	6	3.66	5.94	2170
T8078	28.3	1	1-1/2	4-1/2	7-1/2	1.50	15.9	2385
T6473	37.7	1	2	4	8	2.00	12.6	2520
T5573	29.3	1-7/8	15/16	4-3/8	6-1/4	1.76	15.0	2640
T6866	50.5	1-3/4	1-3/4	3-1/2	7	3.06	9.62	2940
T7898	68.4	2-3/4	1-5/8	3-1/4	6-1/2	4.47	8.30	3710
T8236	83.0	2-3/4	1-7/8	3-1/4	7	5.16	8.30	4280
T8237	46.2	2	1-3/16	5	7-3/8	2.38	19.6	4660
T5866	28.3	1	1	8	10	1.00	50.3	5030
T8238	55.1	2	1-3/8	5	7-3/4	2.75	19.6	5390
T8239	61.3	2	1-1/2	5	8	3.00	19.6	5880
T8240	74.2	2	1-3/4	5	8-1/2	3.50	19.6	6860
T6101	88.0	2	2	5	9	4.00	19.6	7840
T7918	78.2	3	1-1/8	6-1/4	8-1/2	3.38	30.7	10400
T8052	211	4-1/2	2-3/16	4-5/8	9	9.84	16.8	16500
T8226	249	3	2-1/4	9-1/2	14	6.75	70.9	47900

* Standard molded core cases available for these core sizes. Special cases may be made for all other sizes.

** Nominal core weight in pounds for various tape thicknesses is computed by multiplying the gross core volume by the following factors:

1 mil229 2 mil246 4 mil248 12 mil262

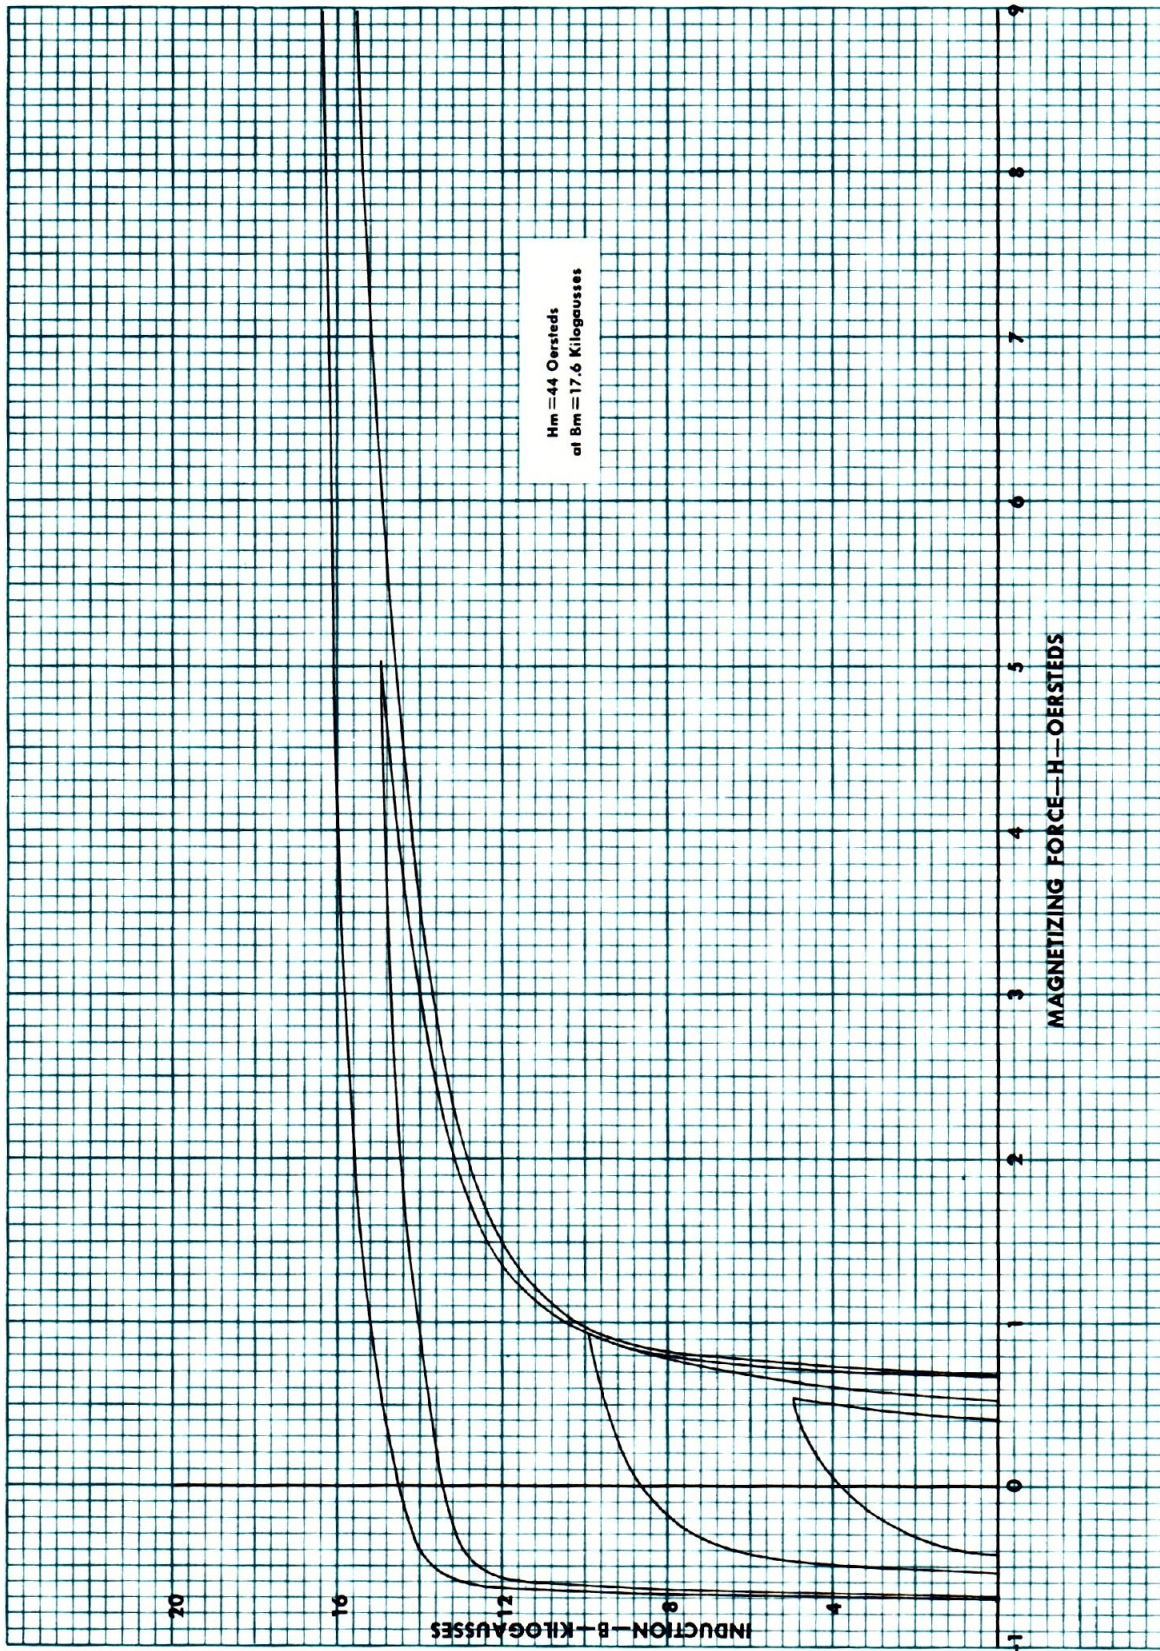


FIG. 13—TYPICAL DC HYSTERESIS LOOPS OF 1 MIL SILECTRON UNCURED CORES—NOT IMPREGNATED

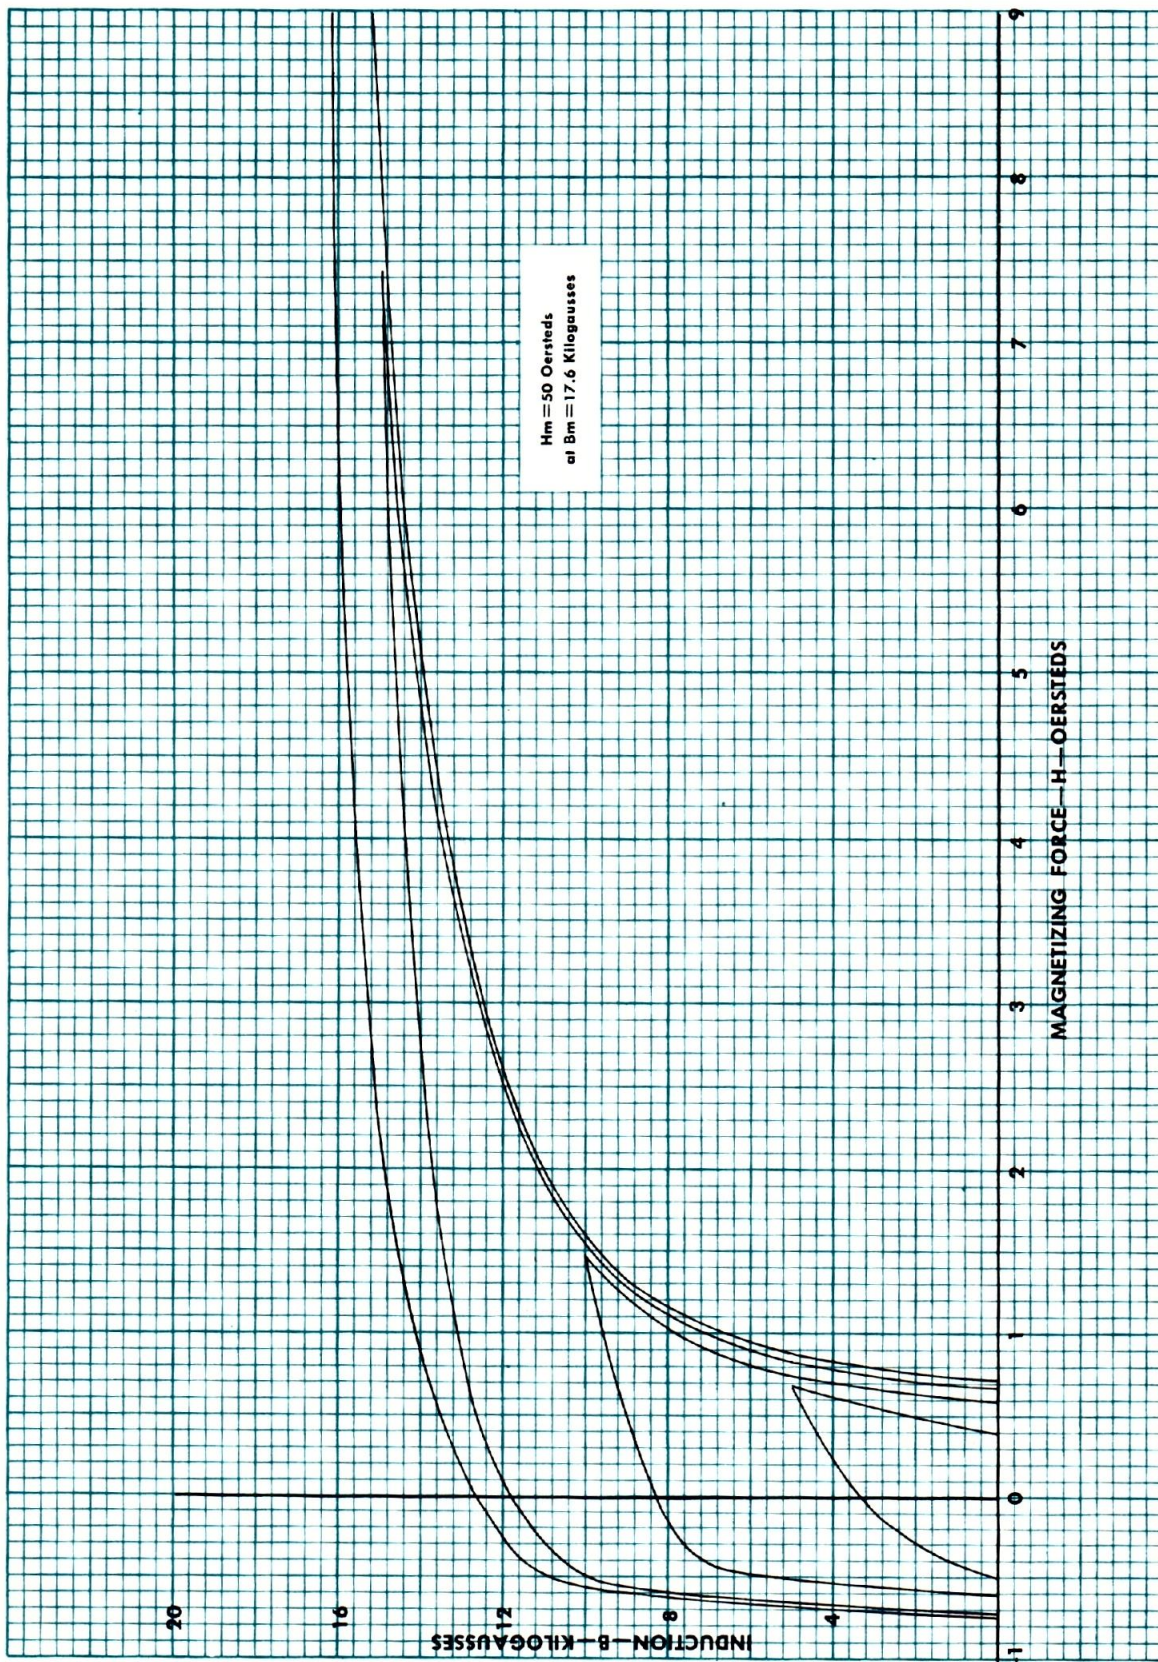


FIG. 14—TYPICAL DC HYSTERESIS LOOPS
OF 1 MIL SILECTRON UNCUT CORES—IMPREGNATED

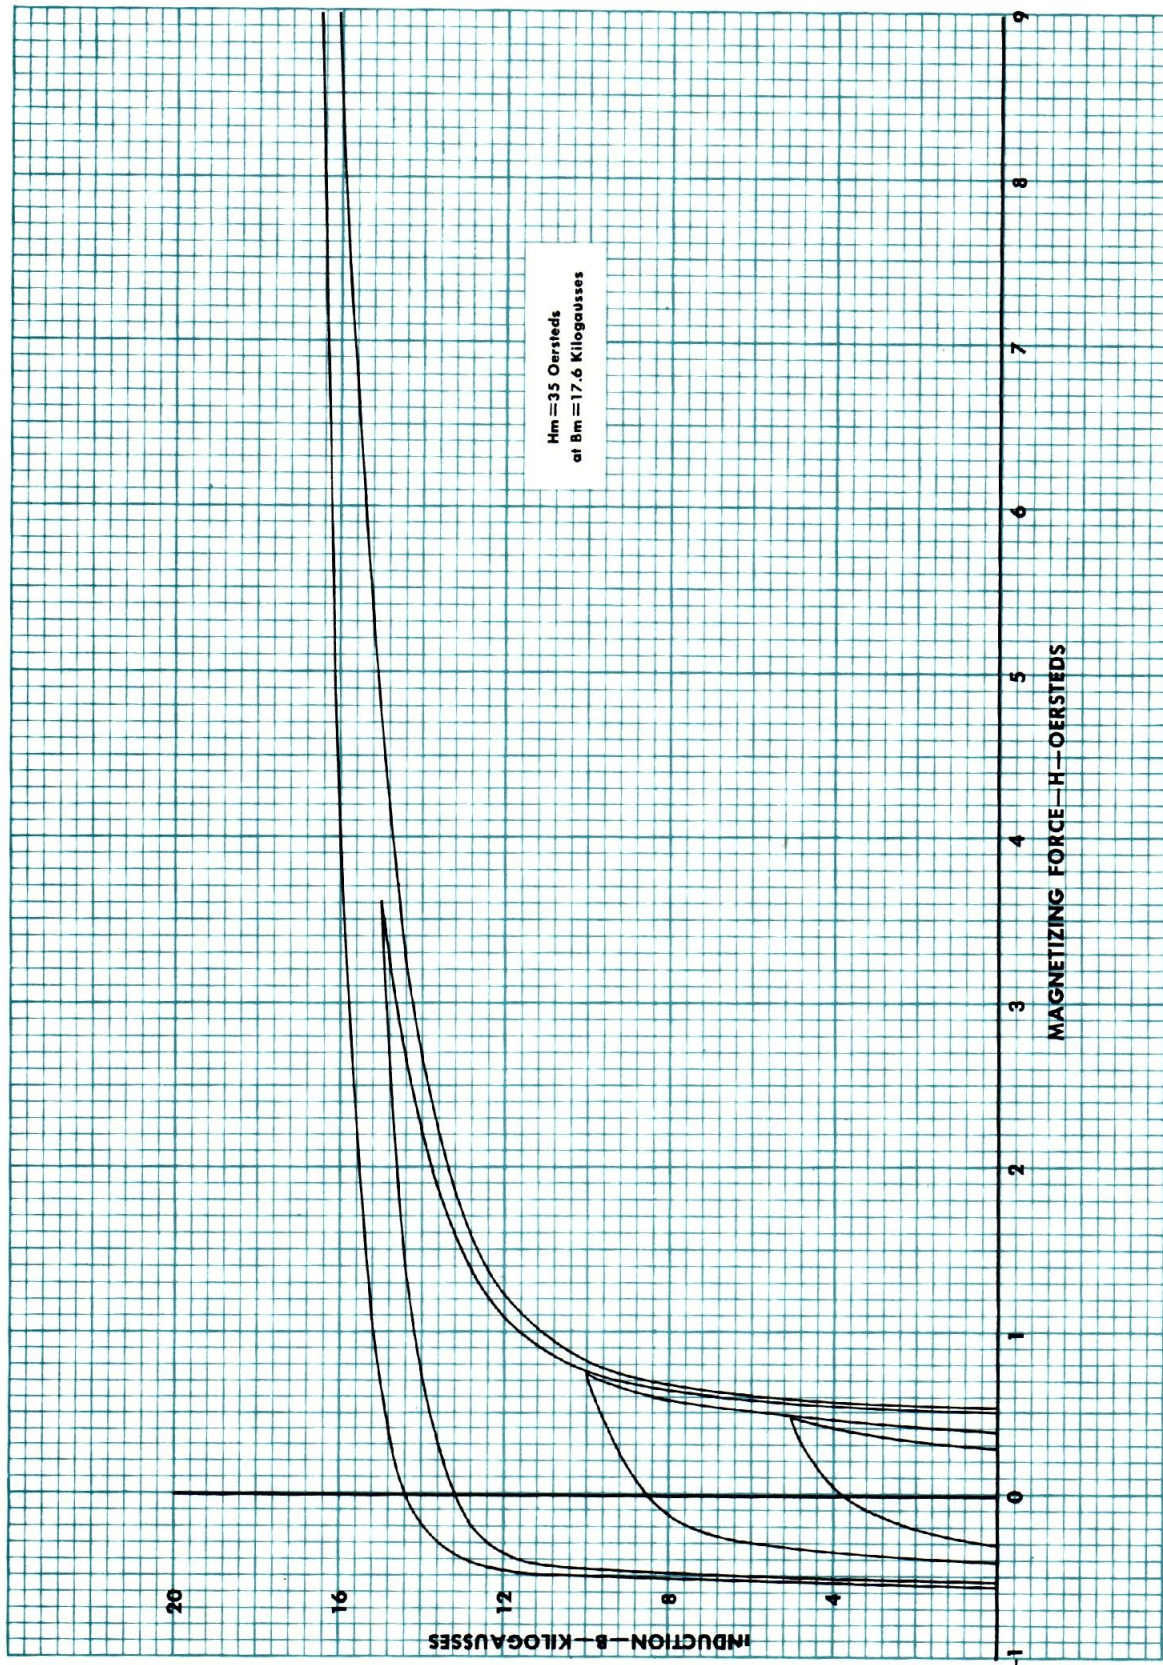


FIG. 15—TYPICAL DC HYSTERESIS LOOPS OF 2 MIL SILECTRON UNCUT CORES—NOT IMPREGNATED

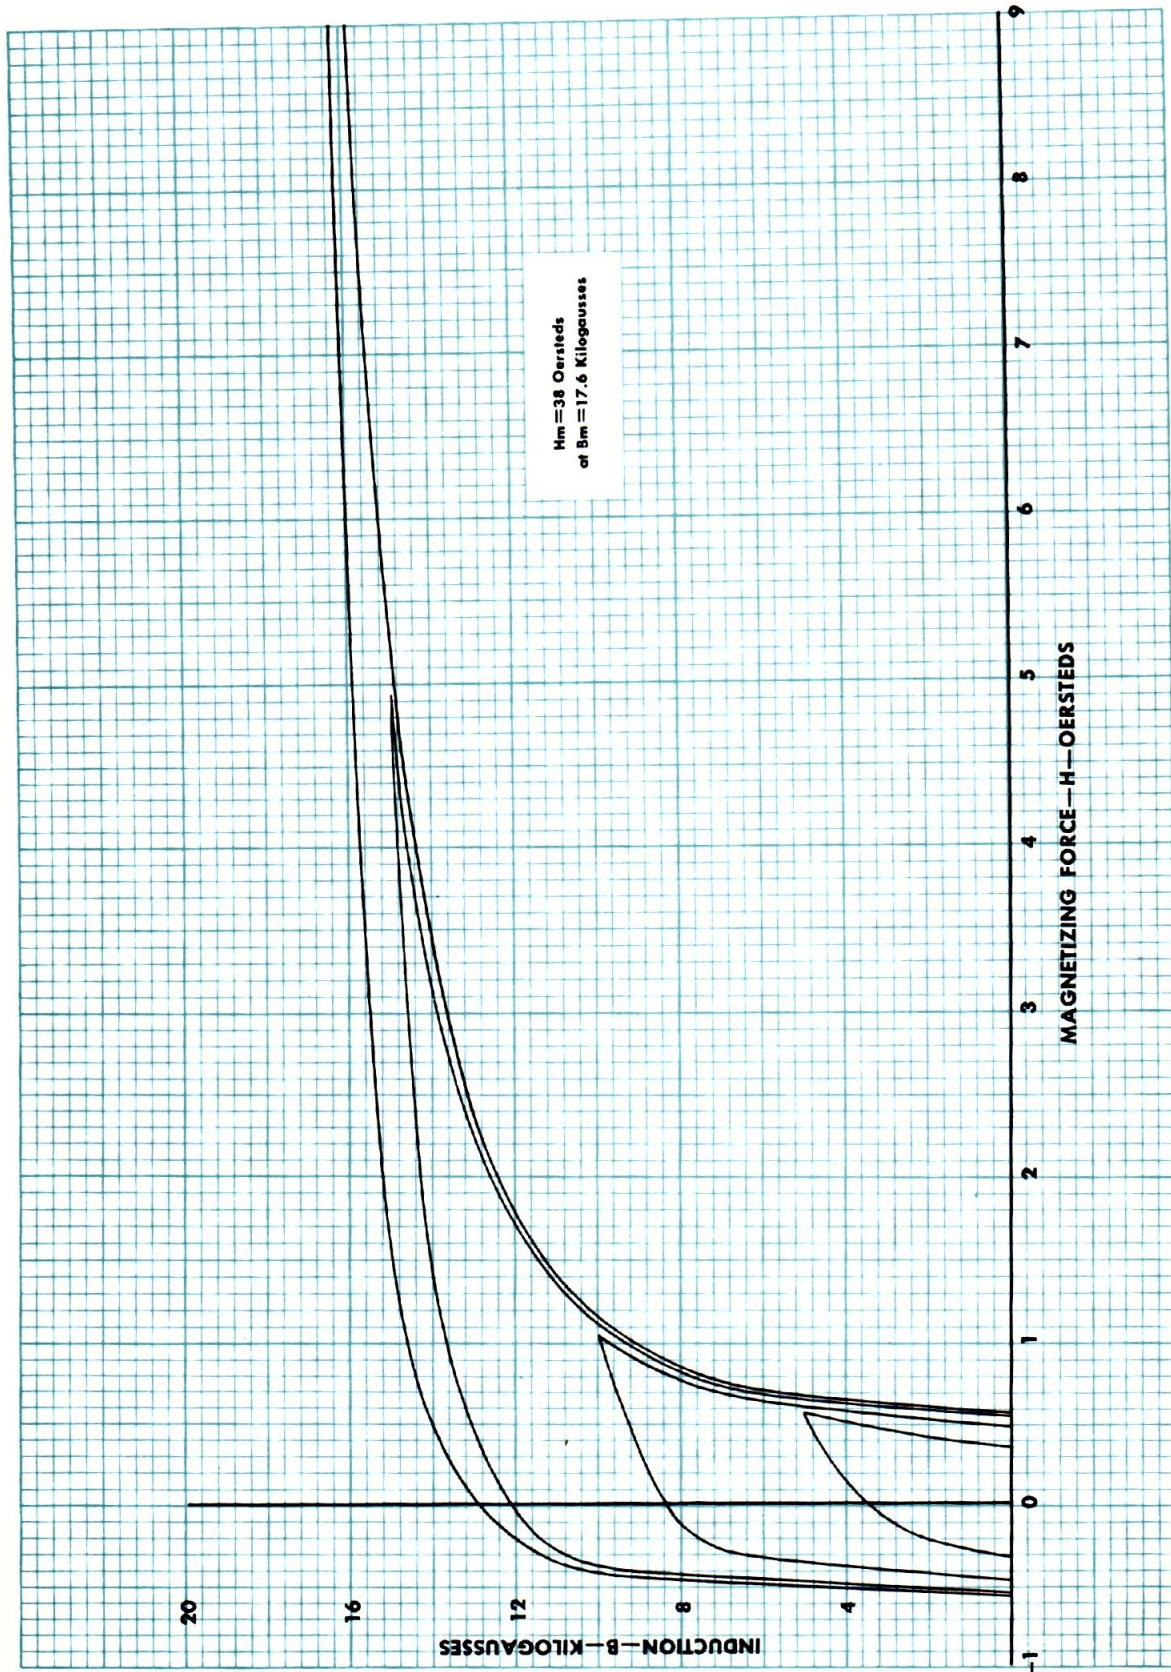


FIG. 16—TYPICAL DC HYSTERESIS LOOPS
 OF 2 MIL SILECTRON UNCUT CORES—IMPREGNATED

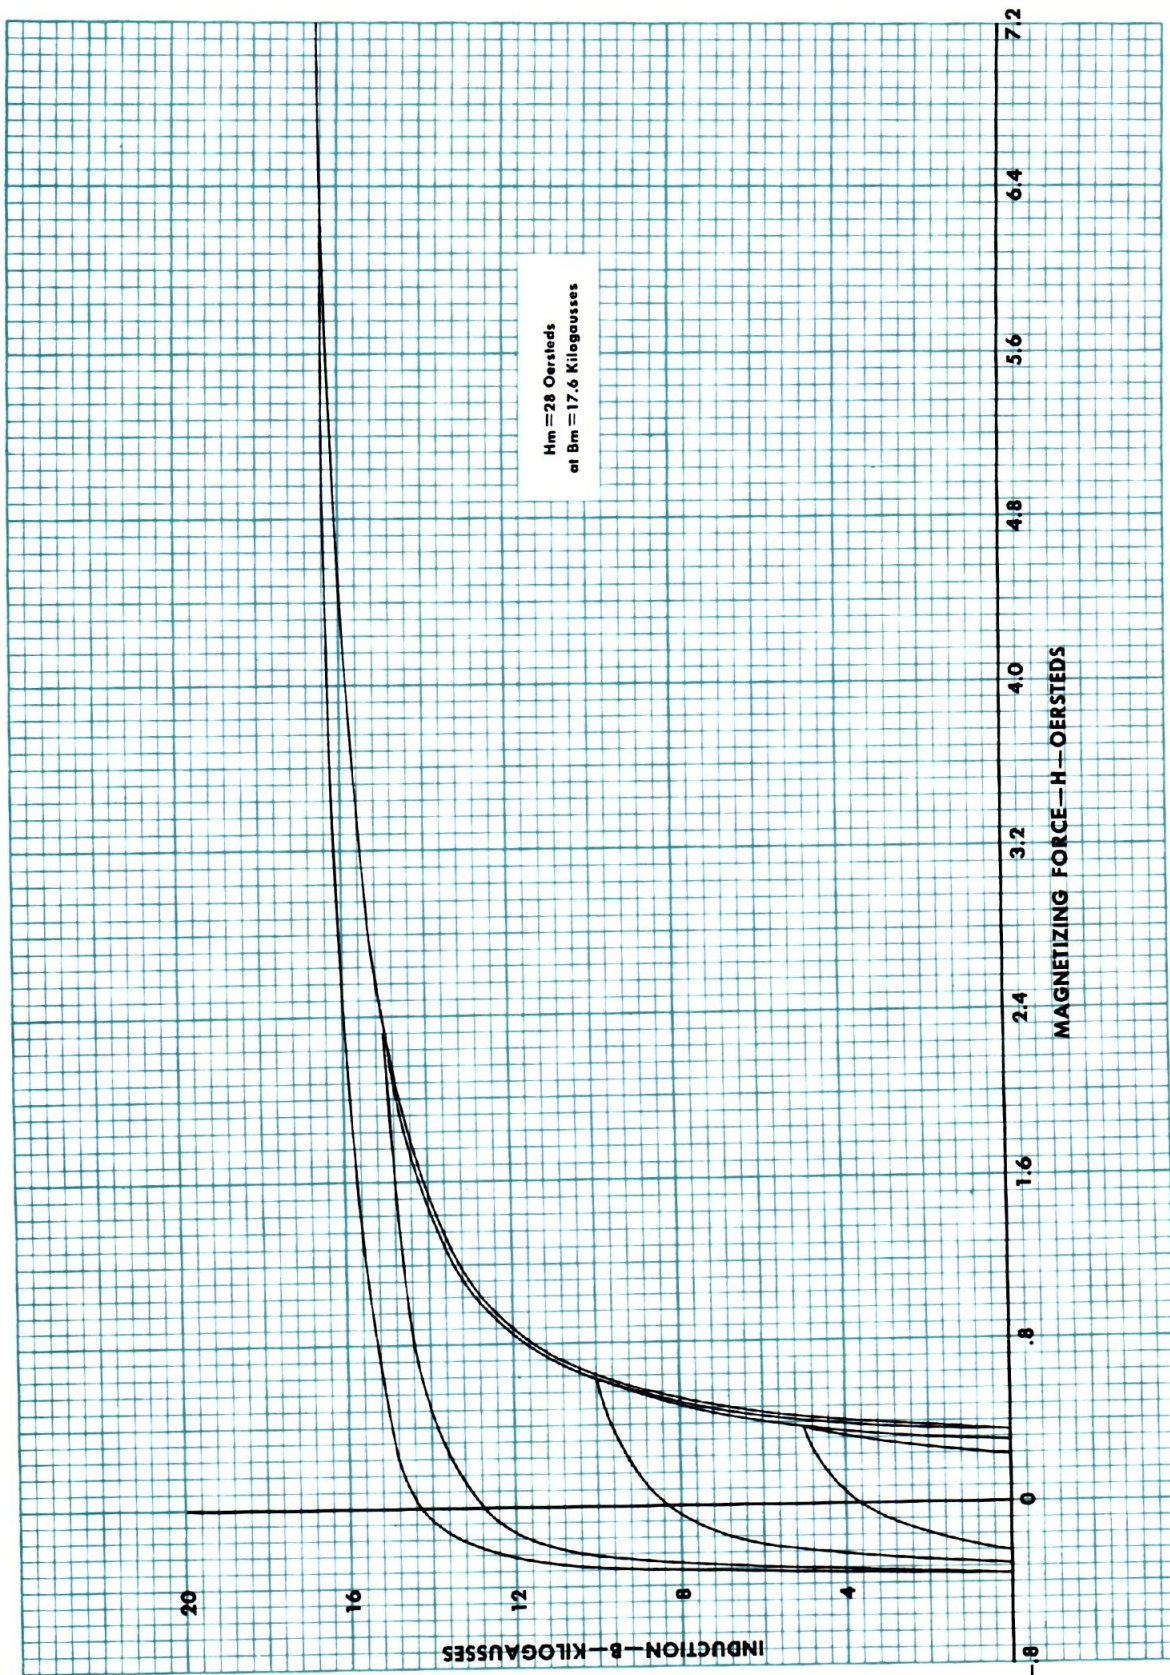


FIG. 17—TYPICAL DC HYSTERESIS LOOPS OF 4 MIL SILECTRON UNCUT CORES—NOT IMPREGNATED

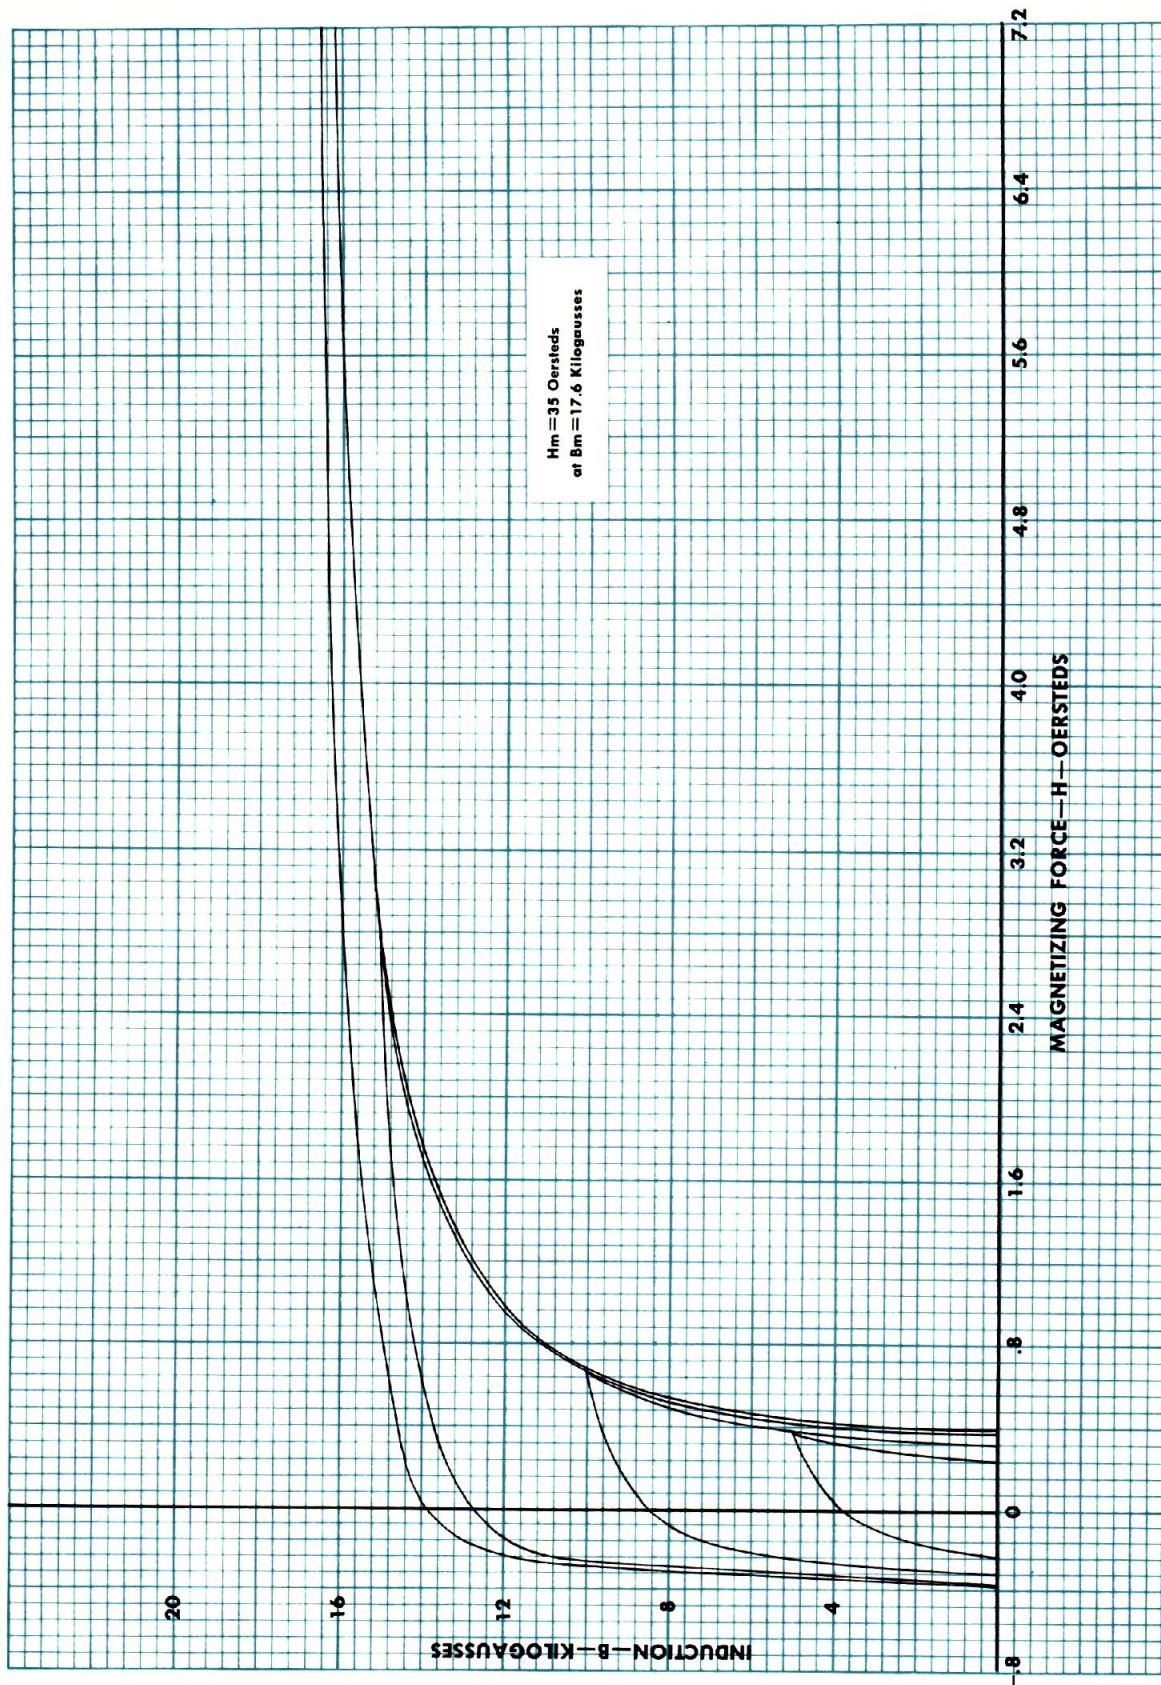


FIG. 18—TYPICAL DC HYSTERESIS LOOPS OF 4 MIL SILECTRON UNCUT CORES—IMPREGNATED

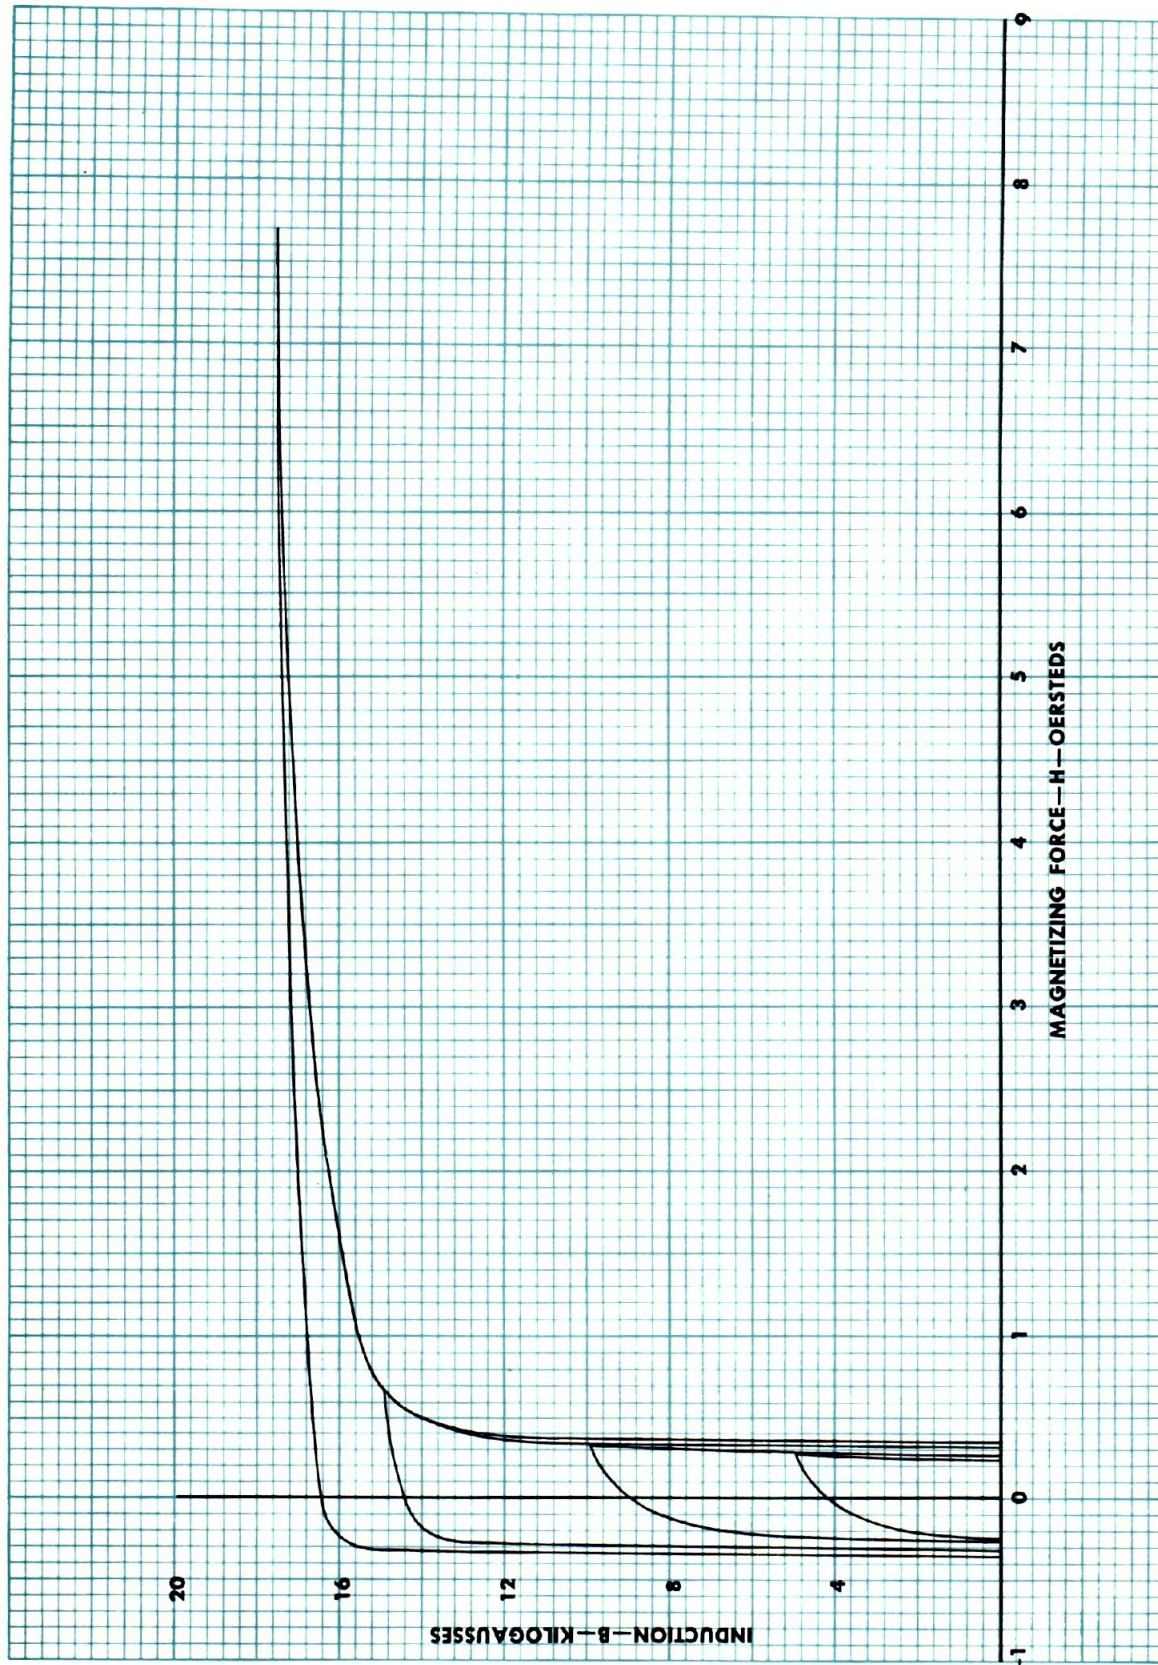


FIG. 19—TYPICAL DC HYSTERESIS LOOPS
OF 4 MIL TYPE Z SILECTRON UNCUT CORES—NOT IMPREGNATED

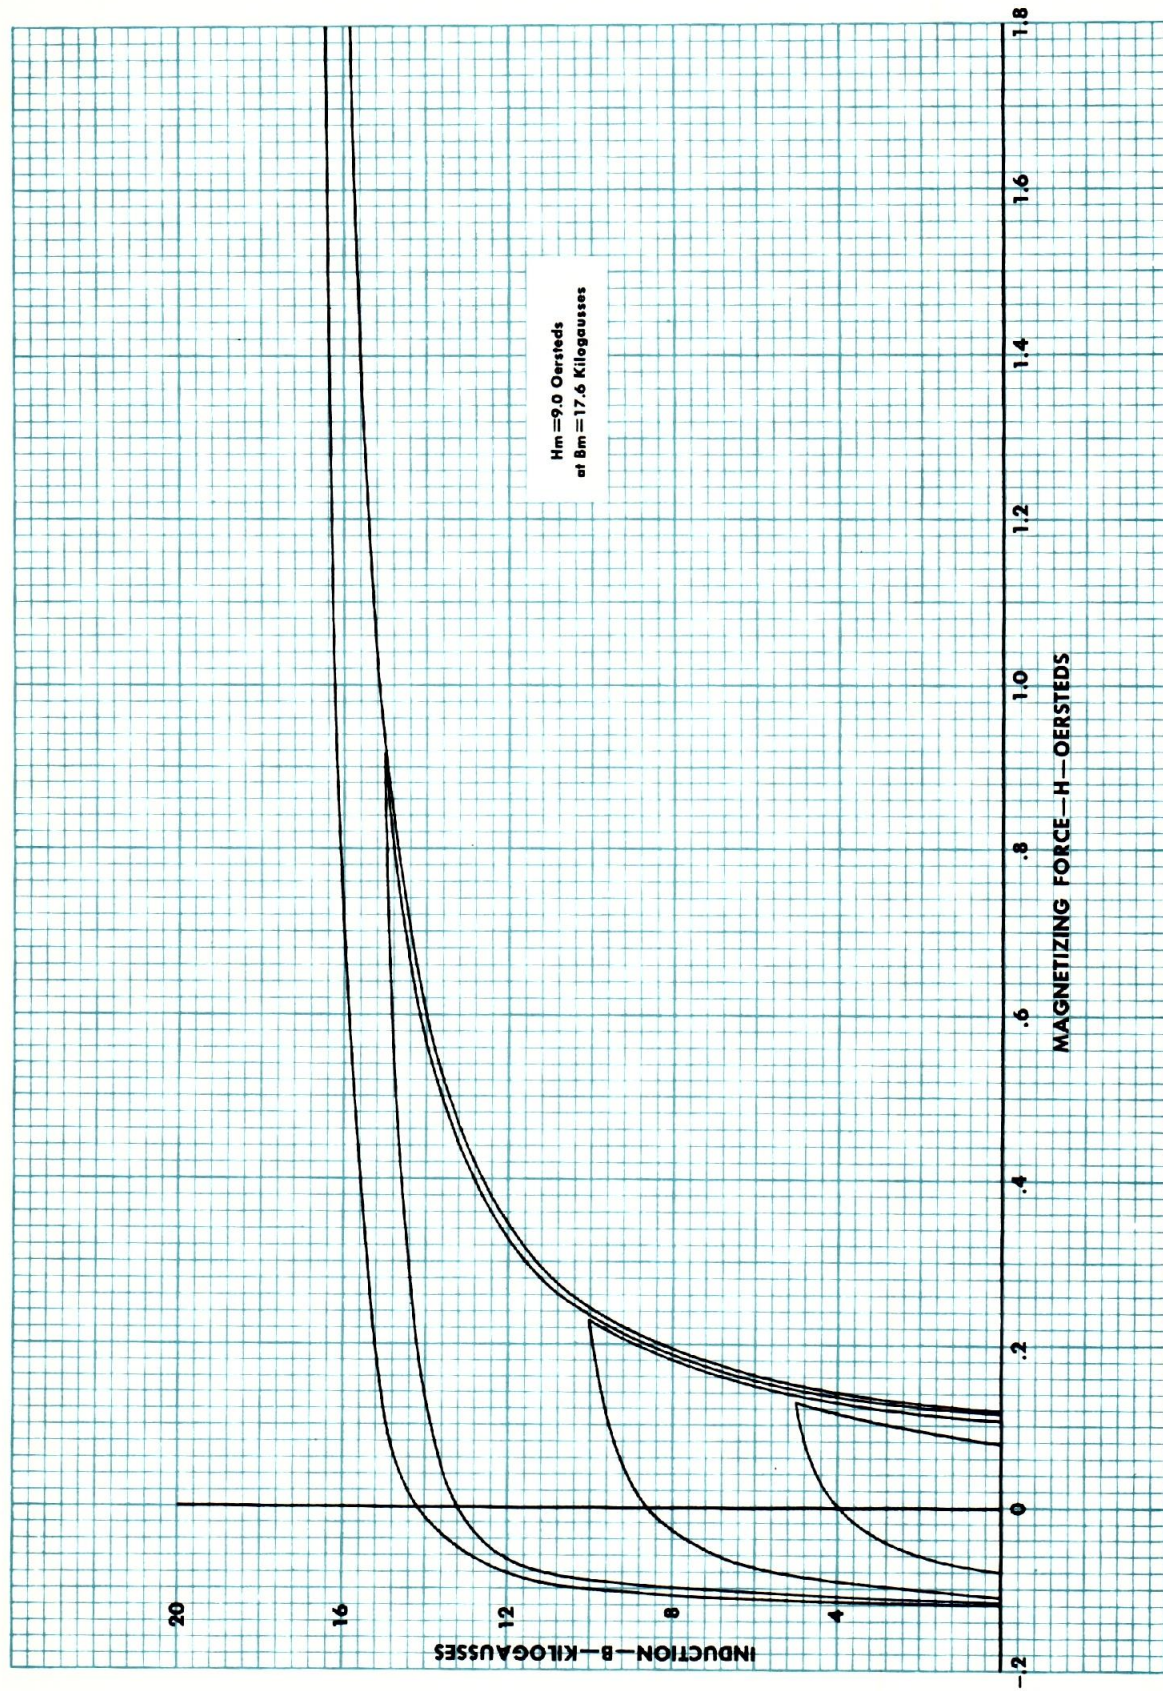


FIG. 20—TYPICAL DC HYSTERESIS LOOPS OF 12 MIL SILECTRON UNCUT CORES—NOT IMPREGNATED

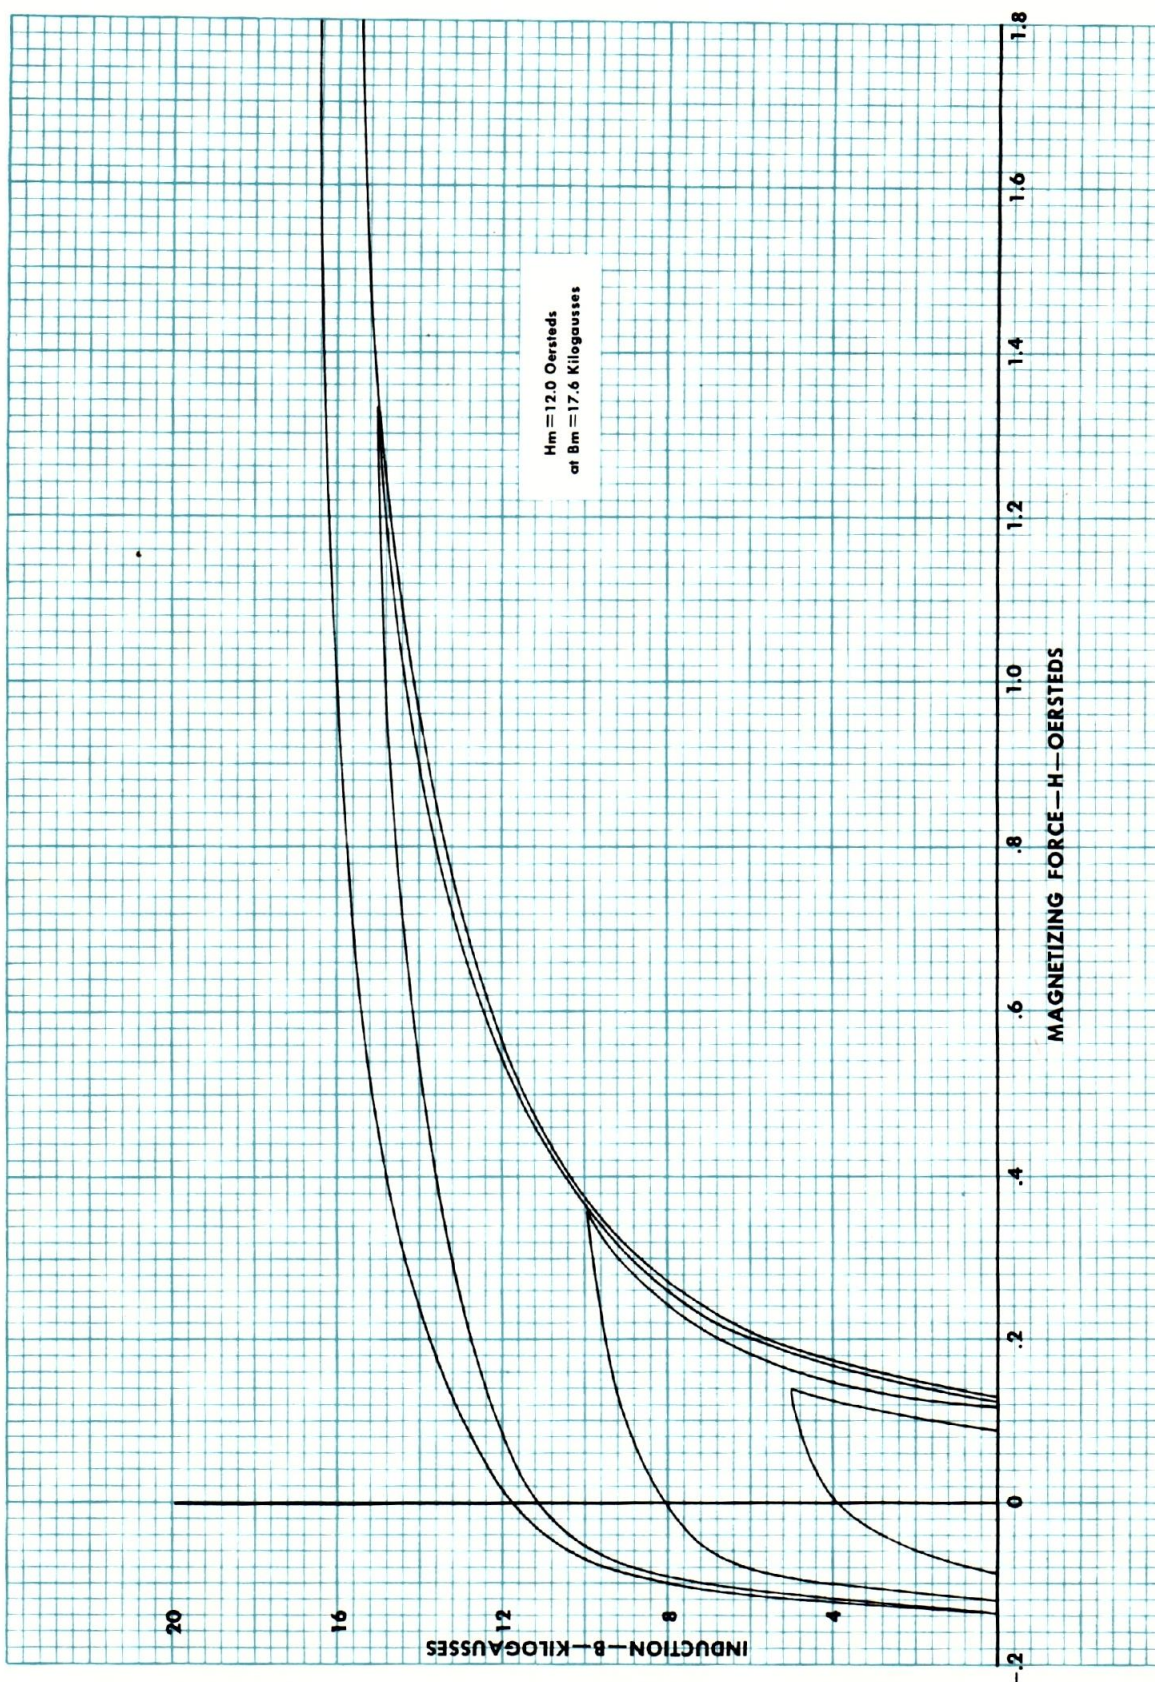


FIG. 21—TYPICAL DC HYSTERESIS LOOPS OF 12 MIL SILECTRON UNCUT CORES—IMPREGNATED

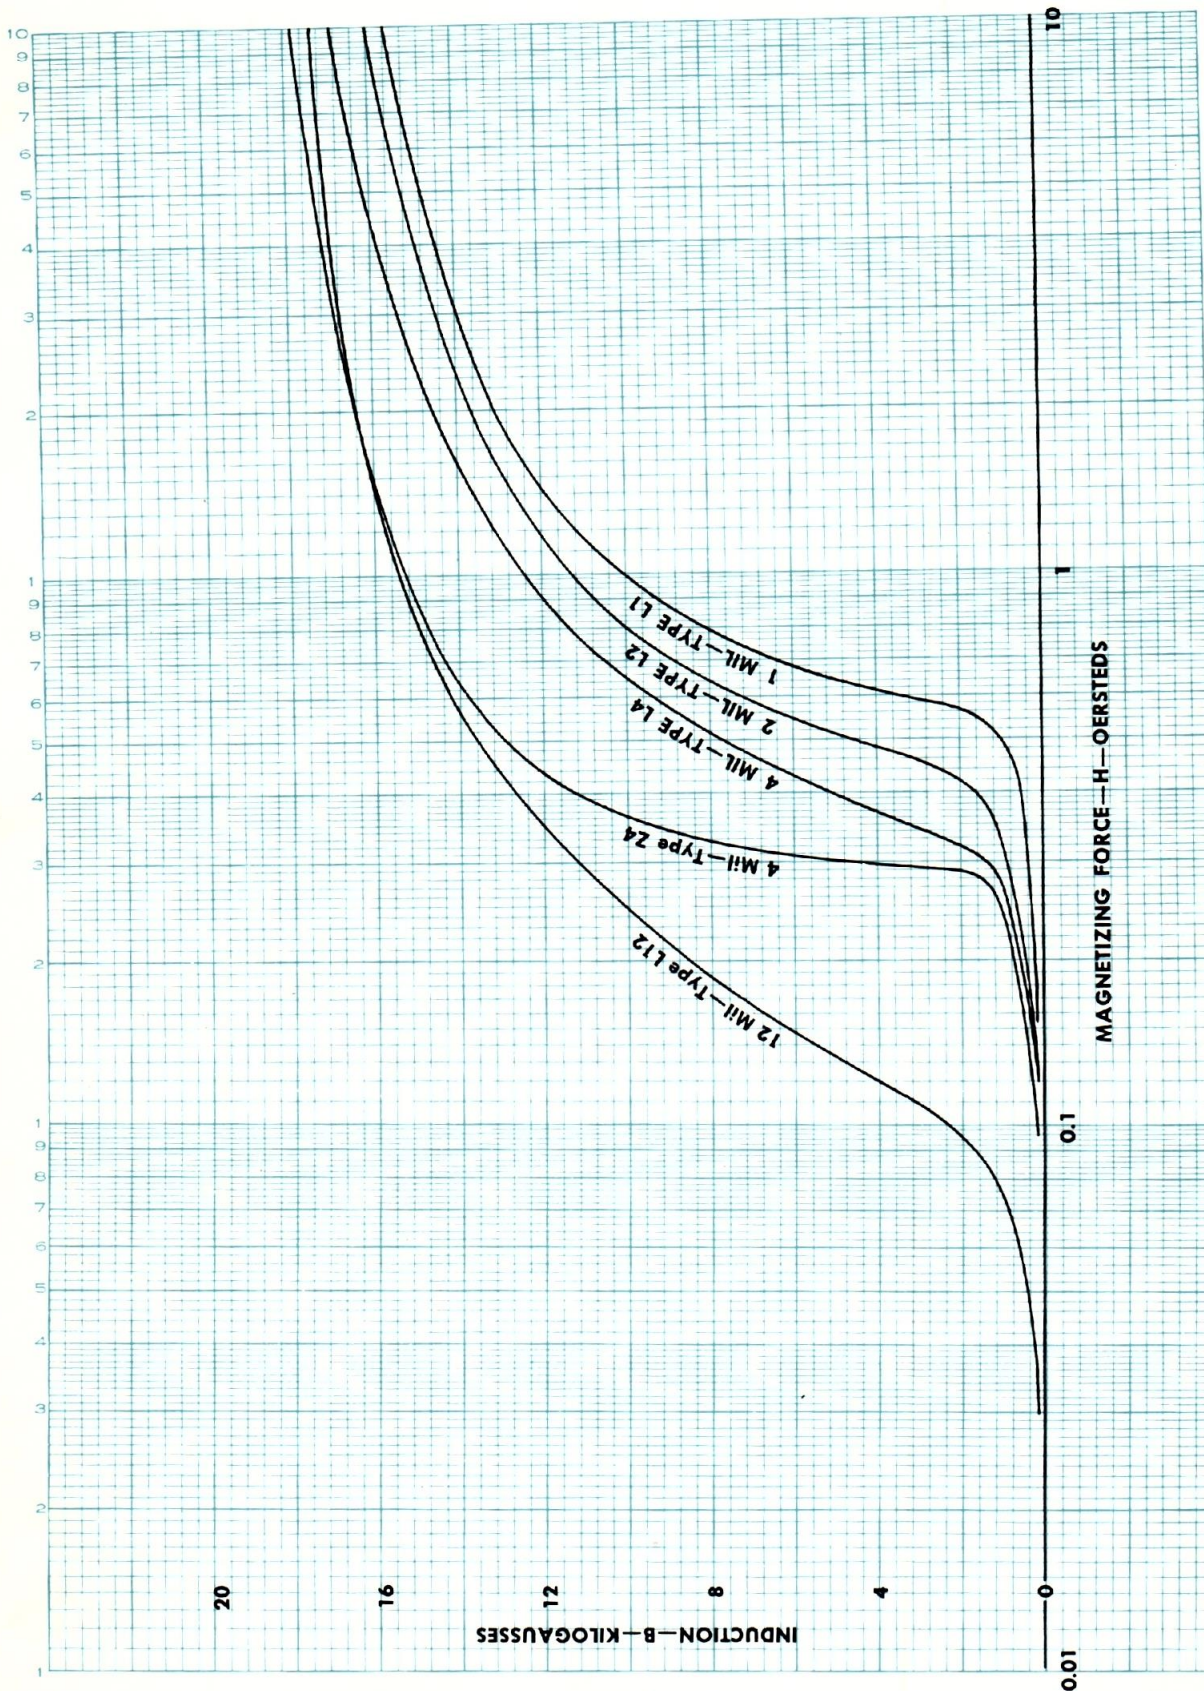


FIG. 22—TYPICAL DC MAGNETIZATION CURVES FOR 1, 2, 4 AND 12 MIL SILECTRON TOROIDS—NOT IMPREGNATED



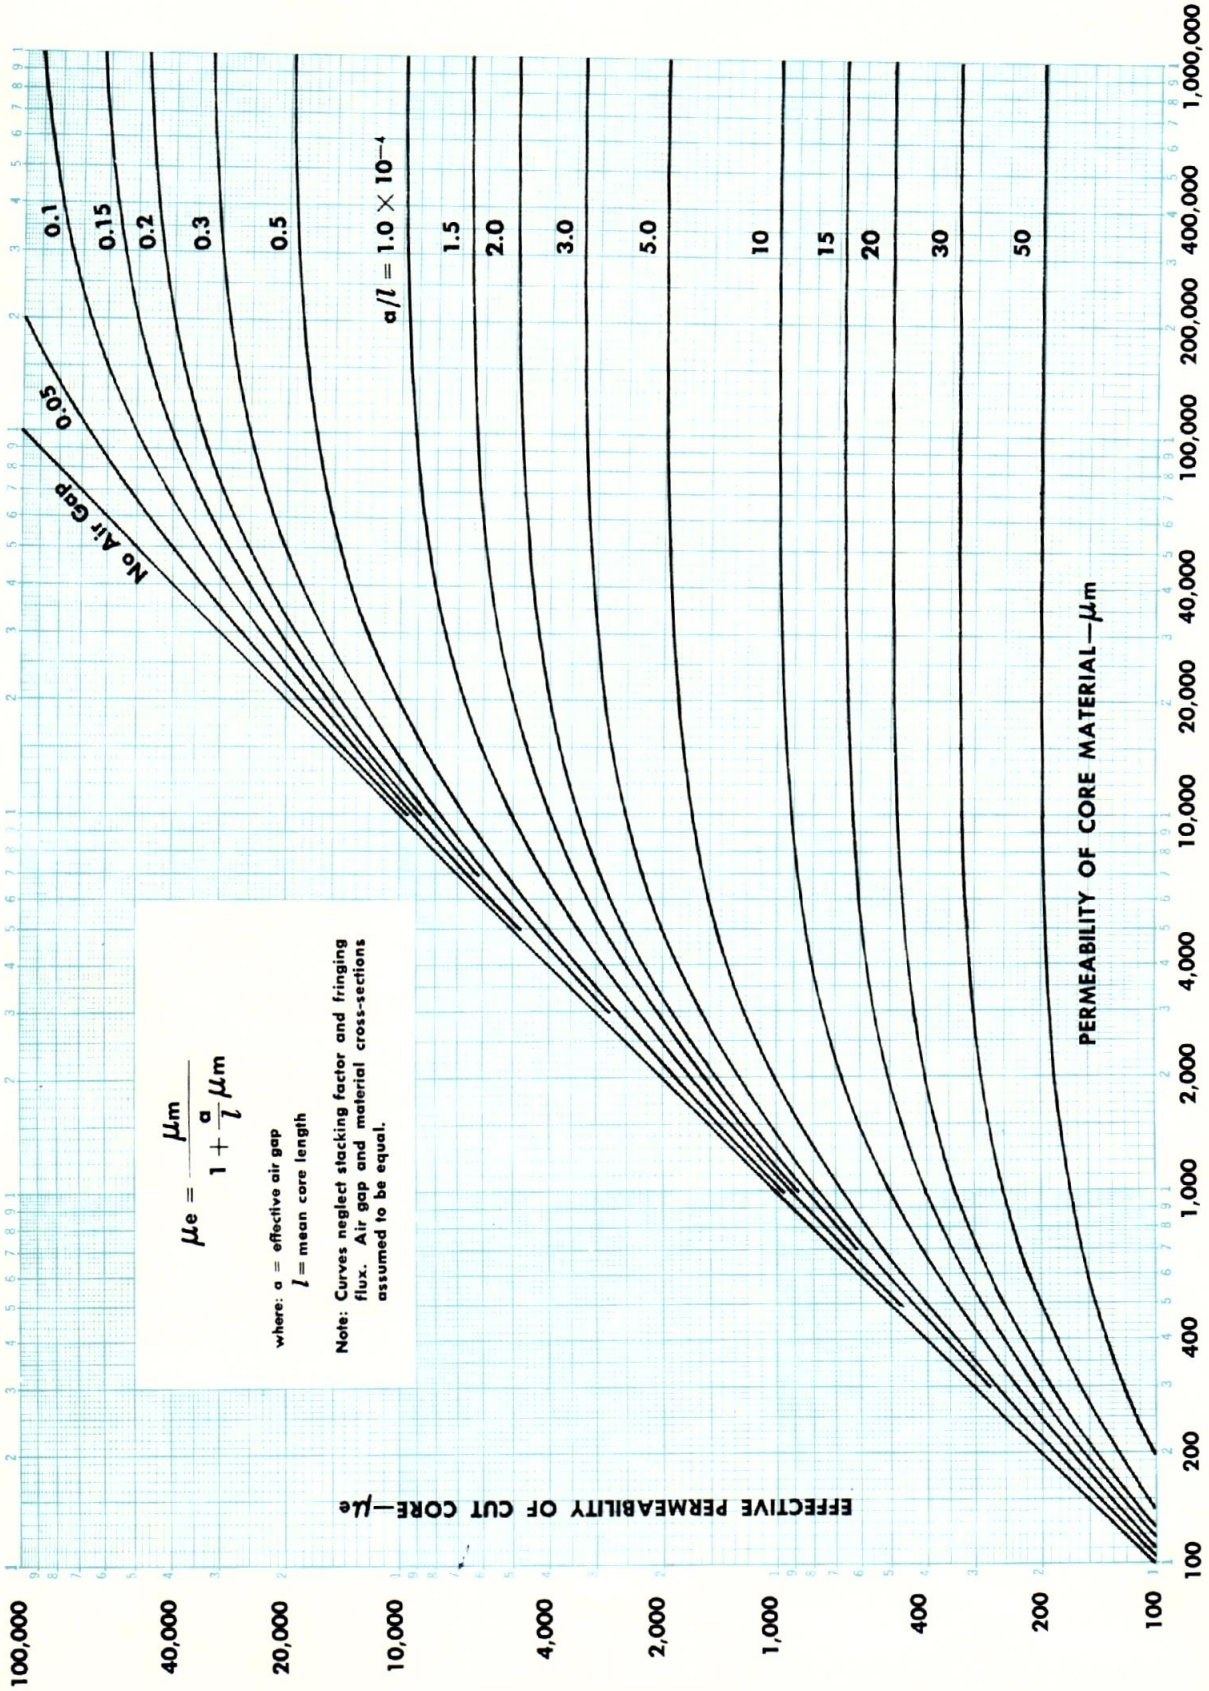


FIG. 23—EFFECTIVE PERMEABILITY OF CUT CORE VS. PERMEABILITY OF CORE MATERIAL


BANDING DATA




Simple Type
single core
single coil

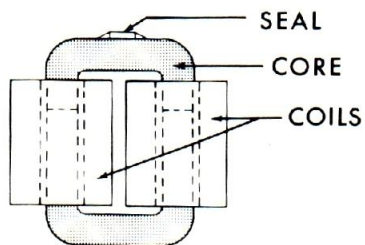

Core Type
single core
double coil



Shell Type
double core
single coil

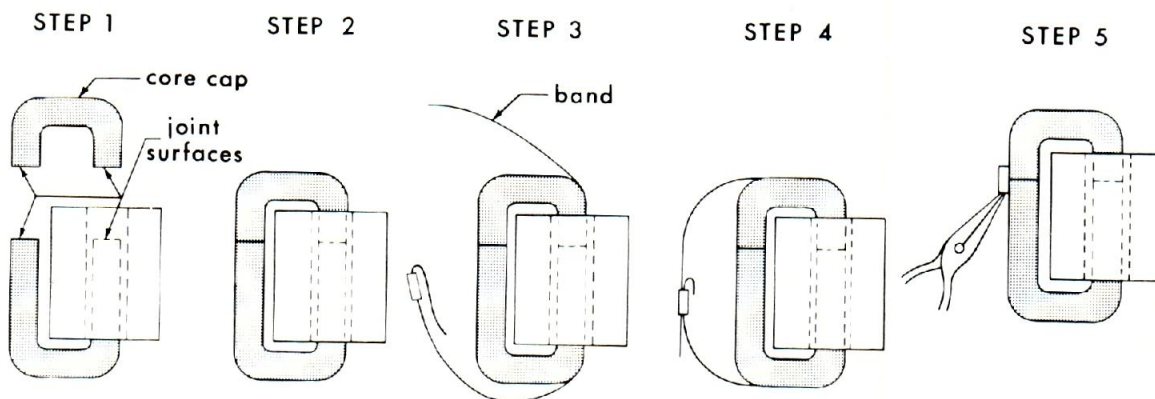

Core Strip Width (in.)	Core Cross-Section (D x E)-in ²	Band Size (in.)	No. Bands Required	Seal Dimension (in.)	Banding Force (lb.)
Any	.188 or less	3/16 x .006	1	3/16 x 1/4	37.5
3/8 or larger	.188 to .375	3/8 x .006	1	3/8 x 3/8	75
3/8 to 1-1/2	.375 to .75	3/8 x .012	1	3/8 x 3/8	150
1-5/8 or larger		3/8 x .006	2	3/8 x 3/8	75
1/2 to 1-1/8	.75 to 1.5	3/8 x .012	1	3/8 x 3/8	150
1-1/4 or larger		3/8 x .012	2	3/8 x 3/8	150
3/4 or larger	1.5 to 3.0	3/4 x .023	1	7/8 x 1-7/8	600
3/4 or larger	3.0 to 4.25	3/4 x .035	1	7/8 x 1-7/8	900
2 or larger	4.25 to 6.0	3/4 x .023	2	7/8 x 1-7/8	600
3-1/4 or larger	6.0 to 9.0	3/4 x .023	3	7/8 x 1-7/8	600
3-1/4 or larger	9.0 to 13.5	3/4 x .035	3	7/8 x 1-7/8	900

total
x 107 / call

~~12000~~

156

115 / 3000

130

252

00

1751

2800

175

91.87
28.00
119.87



ARNOLD

SPECIALISTS in MAGNETIC MATERIALS

THE ARNOLD ENGINEERING COMPANY, Main Office: MARENGO, ILL.
BRANCH OFFICES and REPRESENTATIVES in PRINCIPAL CITIES

26000
2592
432
21612

282
2.66 0.16 2.1612

26000
18
2
1.75
2 calls

1.75
19
25