
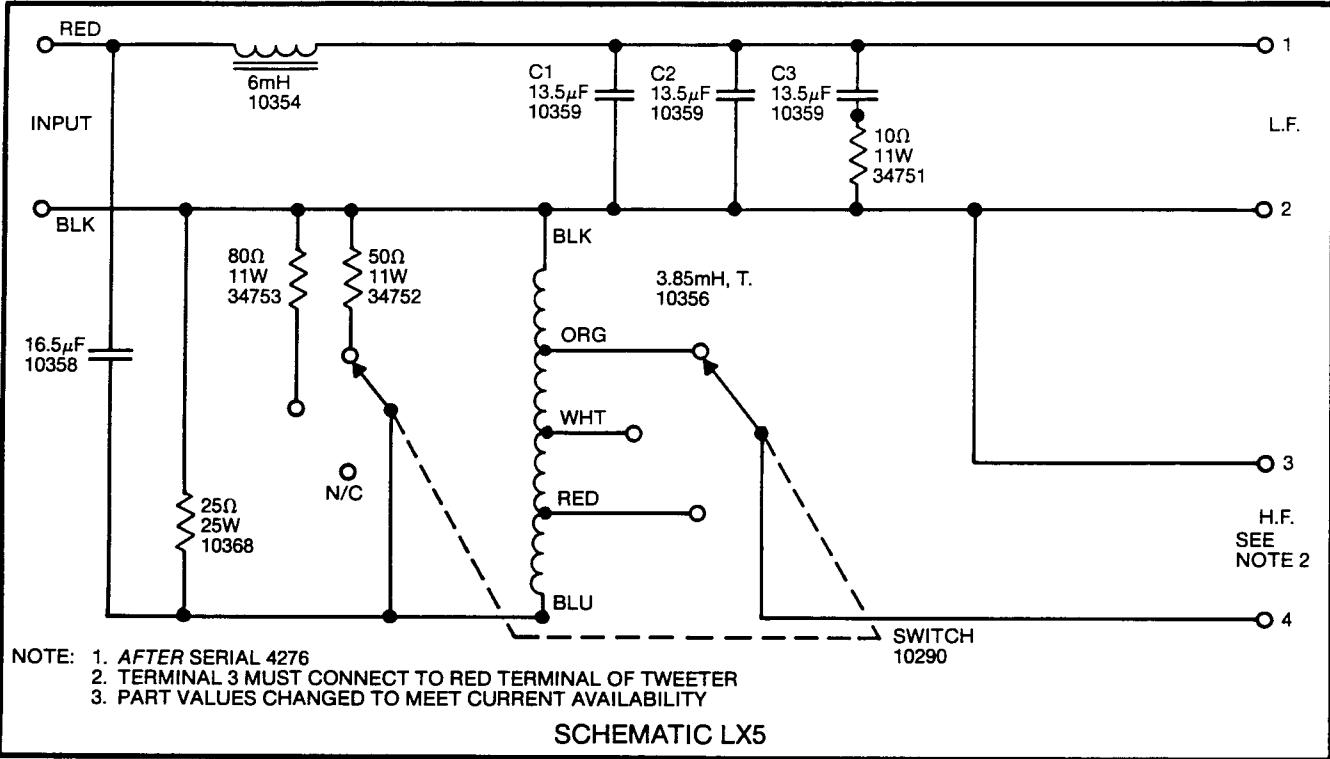


# S507 Olympus S607 Sovereign I



**SYSTEM COMPONENTS:**

**LOW FREQUENCY DRIVER:**  
 LE15A  
 Cone Kit: C16R2215  
 Nom. Impedance: 16 Ohm  
 Dynamic Test Input V: 10  
 Sweep Frequency Hz: 20-1200  
 D.C. Resistance Ohms: 7.6 min/9.2 max  
 Gap Gauge: .057"

**Notes:**  
 If Not Serviceable, Replace With: 2235H  
 Visual Change: Yes  
 Baffle Modification: No  
 Exact Acoustic Replacement: No. Use as last resort. Replace both units in a stereo pair.  
**Additional Parts Currently Available\*:**  
 Dome: 21514  
 Mounting Gasket: 34499  
 Trim Gasket: 21058

**HIGH FREQUENCY DRIVER:**  
 LE85  
 Diaphragm Kit: D16R2421  
 Nom. Impedance: 16 Ohm  
 Dynamic Test Input V: 3.5  
 Sweep Frequency Hz: 550-1200  
 D.C. Resistance Ohms: 5.9 min/7.0 max  
 Gap Gauge: .031"

**Notes:**  
 If Not Serviceable, Replace With: 2425J  
 Visual Change: Yes  
 Baffle Modification: No

**HIGH FREQUENCY DRIVER (Cont'd)**  
 Exact Acoustic Replacement: No. Slightly different. Replace both units in a stereo pair.  
**Additional Parts Currently Available\*:**  
 Horn: H91 (Lens L91 No Longer Available)  
**PASSIVE RADIATOR:** PR15  
 Cone Kit: CRPR15C  
 If Not Serviceable, Replace With: No Replacement Available  
 Visual Change: N/A  
 Baffle Modification: N/A  
 Exact Acoustic Replacement: N/A  
**Additional Parts Currently Available\*:**  
 Dome: 21514  
 Trim Gasket: 21058

**SYSTEM SPECIFICATIONS:**  
 Nom. Impedance: 8 ohm  
 Power Capacity: 100 Watts Continuous Program  
 Crossover Frequency: 500 Hz  
 Sensitivity: 82dB (1 Watt @ 15 Feet)  
 Enclosure Dim: Olympus: 26½" x 40" x 20" D  
 67cm x 102cm x 51cm  
 Sovereign I: 26½" x 38¾" x 19½" D  
 67cm x 98cm x 50cm  
 Shipping Weight: Olympus: 165 lbs. - 75 kg.  
 Sovereign I: 190 lbs. - 86 kg.

**SYSTEM NOTES:**  
 S7R System

\*Other parts may also be available. Check with JBL for details.